


# HAND SEALERS

The welding time is adjustable, to match the type and thickness of material. The models with cutting blade can be used to produce bags from tubing or to seal filled bags and to trim the exceeding material.

**Seal width :** **2mm**  
 Max. Sealable Thickness : 2x0.125mm

Model	sealing length	Power (Watts)	Weight (Kg)
7914.201	200	260	4
7914.211 with cutter blade	200	260	4
7914.221	300	380	5
7914.222 with cutter blade	300	380	5
7914.231	400	500	6
7914.232 with cutter blade	400	500	6
7914.233 with cutter blade	500	550	7

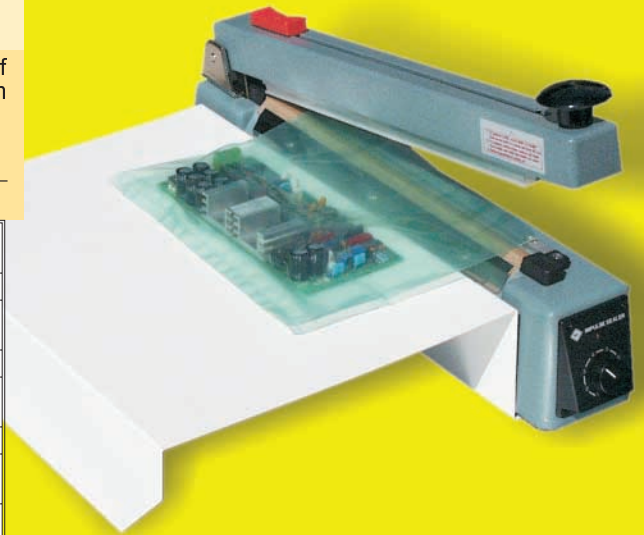

## LARGEST HAND SEALER

- Easy to operate, short distance from your working table, only 2.8cm
- Super longer seal length (600mm)
- Impulse sealing with electronic control, heating time from 0-2sec
- with handle easy to carry
- Soldering width: 2mm
- Max. Sealable Thickness : 2x0.125mm

7914.252 Largest hand sealer, 450 x 2mm (600W - peso 6kg)  
 7914.253 Largest hand sealer, 600 x 2mm (800W - peso 8kg)  
 7914.254 Largest hand sealer, 800 x 2mm (800W - peso 9kg)



## HAND SEALER (medical)

### 10mm seal with beeper and cutter

Recommended for the health care industry, creates water-tight seals on sterilisation rolls (paper-plastic) and sterilisation tubing (plastic-plastic) materials.

The welding time is adjustable, to match the type and thickness of material, an audible beep advises when the seal is complete. Each seal has a deeply embossed texture.

7914.215 MEDICAL Hand Sealer with Cutting Blade

Max. seal length: 200mm  
**Seal width: 10mm**  
 (according DIN58953 regulations )  
 Max. seal thickness: 2x0.25mm  
 Power 1000W - Weight 6,4kg



# SHRINK WRAP SYSTEM

- Works on monofolded shrink film (already perforated to let the air flow out).
- Sealing bar with timer, to be used in 2 steps.
- Warming by means of a heating gun, 2 speeds.


Model	Max. sealing length	Sealer Power (Watts)	Heat Gun Power (Watts)
7914.255	450	350	600/1200
7914.257	600	450	600/1200



## HAND HELD CRIMPER SEALER

Soldering length: 150mm  
 Max. soldering thickness : 2x0.15mm

7914172 Hand held crimper sealer for polyethylene film  
 Teflon covered heating resistance  
 Seal width 2mm  
 7914175 Hand held crimper sealer for cellophane  
 or wax paper  
 Double 15mm wide heating jaws  
 Vertical line embossed seal

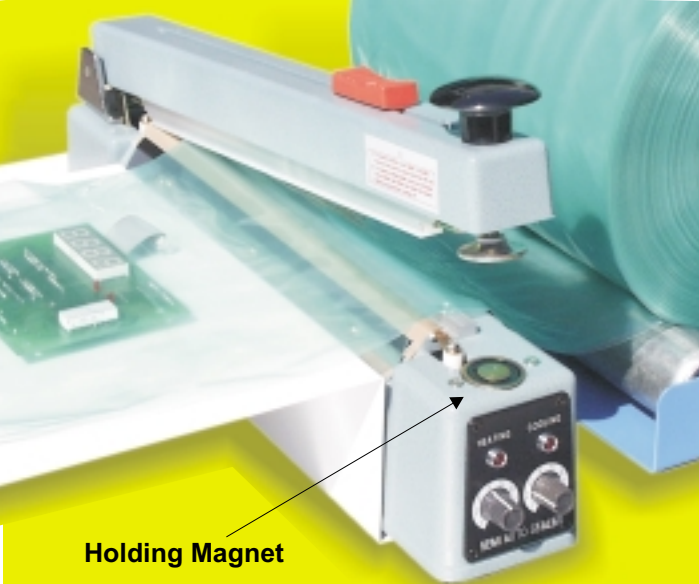

## HAND SEALER WITH HOLDING MAGNET AND CUTTER

The machine operates quickly and efficiently with magnet hold, offering consistent secure sealing for every package. After the seal cycle the machine re-opens automatically.

- Adjustable welding and cooling time.
- Uniform set contact pressure.
- Welds all types of thermoplastic films.
- Easy and simple to operate.

<b>Seal width:</b>	<b>5mm</b>
Max. seal thickness:	2x0.150mm
<b>7914.245</b>	Hand Sealer with holding magnet and Cutting Blade
Max. seal length:	300mm
<b>7914.246</b>	Hand Sealer with holding magnet and Cutting Blade
Max. seal length:	400mm

Holding Magnet

### ACCESSORIES FOR HAND SEALERS

- 7914.217** Worktable for sealing unit 200mm
- 7914.227** Worktable for sealing unit 300mm
- 7914.237** Worktable for sealing unit 400mm
- 7914.226** Holder for tubing roll, maximum width 310mm
- 7914.236** Holder for tubing roll, maximum width 510mm




## DOUBLE AUTOMATIC HEAT SEALER

Heavy duty, single or double, automatic or manual impulse heat sealer. Seals up to 0.5mm gusseted or regular thermoplastic film. Separate programmable timers for material thickness, congealing and operating cycle. Foot switch included for manual operation.

<b>Seal width</b>	<b>10mm</b>
Max. seal thickness	0.5mm

<b>7914.247</b>	Automatic constant heat sealer 300mm ( 2000W - weight 22kg )	<b>7914.247V</b>
<b>7914.248</b>	Automatic constant heat sealer 450mm ( 2500W - weight 24kg )	<b>7914.248V</b>
<b>7914.249</b>	Automatic constant heat sealer 600mm ( 3000W - weight 26kg )	<b>7914.249V</b>

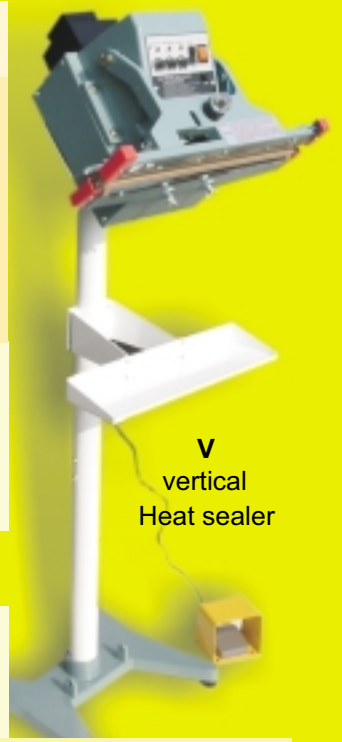

V vertical Heat sealer

## AUTOMATIC BAND SEALERS

These versatile portable band sealers, available in horizontal and vertical feed, are designed for sealing all kinds of plastic materials and bag. The vertical model is ideal for the packaging of bags containing spillable items such as powders or liquids. Standard embossing attachment allows to print date and lot coding on the bag (till to 39 numbers)



Construction	stainless steel
Seal width	8mm
Max. Seal thickness	800 m
Max. Length (height) of the bags	300mm
Conveyor speed	0-12m/min
Temperature range	0-300°C
Power	500W
Weight	35kgg

- 7914.190** Horizontal automatic band sealer
- 7914.191** Vertical automatic band sealer

