



GDM-8300 Series

50000 Counts Dual Measurement Multimeter

3 Year WARRANTY

FEATURES

- 50000 Counts Vacuum Fluorescent Display with Two Colors
- Dual Measurement
- Fast Measurement Rate Up to 40 readings/s for DCV
- 0.02% DCV Basic Accuracy
- Auto/Manual Ranging
- True RMS (AC, AC+DC)
- 11 Measurement Functions
- Max./Min.,REL,MX+B,1/X,Ref %,Compare,Hold,dB,dBm
- Standard USB Device for Communicating to PC
- Temperature Measurement (GDM-8342 only)
- USB Storage for Data Collection (GDM-8342 only)
- Optional GPIB (factory install for GDM-8342 only)

GW INSTEK
Simply Reliable

Unrestrained Storage and Connection

Data storage no longer be bound by transmission wires

GW INSTEK rolls out the new generation Dual Measurement Multimeter -- the GDM-8300 Series, which has two models - GDM-8341 and GDM-8342. Its exceptional features include 50,000 counts, VFD dual-display, 0.02% basic DC voltage accuracy and a USB protocol connector to provide users with measurement precision, lucid data observation, and the convenience to connect with the personal computer.

The GDM-8300 Series not only supports the fundamental measurement items provided by general multimeters, but also equips with capacitance and temperature measurement functions. Furthermore, the GDM-8300 Series also provides many auxiliary functions to meet the measurement requirements for manufacturing process tests, educational experiments and testing facilities.

With respect to storing and retrieving data, the GDM-8300 Series has two methods to offer: first, the USB flash drive storage function--- operating alone without connecting with a computer; second, USB interface (virtual COM port) and optional GPIB interface (must be installed in factory) for automatic measurement system users to conveniently save and retrieve data.

PANEL INTRODUCTION



A. CONVENIENT USB FLASH DRIVE STORAGE FUNCTION

The major distinction between GDM-8342 and products in the same category is that GDM-8342 provides USB flash drive storage function, which allows users to conveniently save data into a USB flash drive through a simple and proper setting. This unique function, different from other digital multimeters which must first save data into its own internal memory then transfer out the file, or connect multimeters with a computer to retrieve data, not only saves operational time but also cuts down the cost and time of developing programs. The USB flash drive storage function incorporates two modes -- basic and advanced, which can be selected from the front panel. When the basic mode is on, data will be saved into an automatically established new folder (time of established file will be determined by system default) and the starting time of data logging will use a fixed time marker (00hr: 00min: 00sec). For advanced mode, users can designate a file path to save data or establish a new folder and the starting time of data logging is determined by users' inputs (for instance: 23hr: 45min: 32sec). The number of data files can be saved in one second is determined by the speed of selected function.



The USB storage function allows each flash drive to establish 100 folders (GW000 ~ GW099). Each folder has a capacity of saving 5,000,000 data files (which are divided into 100 sub-file names, therefore, each sub-file name can save 50,000 data files. Take folder GW000 as an example, internal file names are GW000_00 ~ GW000_99). The storage format is CSV, which can open files and conduct file analysis by existing tools. (such as Microsoft Excel)

B. SELECTABLE MEASUREMENT SPEEDS



Will not Decrease Displayed Digits Because of Selecting Different Speeds

Function vs. Speed	Slow	Medium	Fast
DCV/DCI/R	5	10	40
ACV/ACI	5	10	40
Continuity/Diode	10	20	40
Frequency/Period	1	10	76
Capacitance	2	2	2

The GDM-8300 Series has three selectable measurement speeds—fast/medium/slow. For instance, the DC voltage measurement can reach 40 readings per second on the fast mode, which can maximize the effectiveness of each measurement.

C. DUAL MEASUREMENT/DUAL DISPLAY



	ACV	DCV	ACI	DCI	Hz/P
ACV	✓	✓	✓	✓	✓
DCV	✓	✓	✓	✓	✓
ACI	✓	✓	✓	✓	✓
DCI	✓	✓	✓	✓	✓
Hz/P	✓	✓	✓	✓	✓

The GDM-8300 Series, similar to GW INSTEK's 6 1/2 and 5 1/2 digits multimeters, equips with dual display to support the possible combinations of measurement items. For example, the DC voltage and current or DC voltage with AC element will appear when monitoring components of test wiring. The results of each measurement will simultaneously appear on different displays that not only save users' precious time but also exempt users from the trouble of selecting displays while reading measurement results.

D. VARIOUS MEASUREMENT ITEMS AND FUNCTIONALITIES




Auxiliary Functions	MAJOR MEASUREMENT ITEMS						
	V	I	R	Hz/P	Temp*	Diode	Capa.
dB	✓	—	—	—	—	—	—
dBm	✓	—	—	—	—	—	—
Max/Min	✓	—	✓	✓	✓	—	✓
Relative	✓	✓	✓	✓	✓	—	✓
Hold	✓	✓	✓	✓	✓	—	—
Compare	✓	✓	✓	✓	✓	—	✓
Math	✓	✓	✓	✓	✓	—	—

The GDM-8300 Series provides various measurement items and functionalities compared with that of the products of same category. There are twelve major measurement items of this series including AC voltage/current, DC voltage/current, AC+DC voltage/current, two-wired resistance, capacitance, Frequency/ period, diode and continuity beeper test. Temperature measurement is an optional

function for GDM-8342. Many auxiliary functions, such as maximum/minimum values, reading hold, relative values, dB, dBm, algorithms (MX+B, 1/X, %) and comparison, are designed to reinforce the major measurement items to satisfy users' daily working requirements.

E. COMMAND COMPATIBILITY & FREE SOFTWARE-REMOTE CONTROL AND DATA RETRIEVING

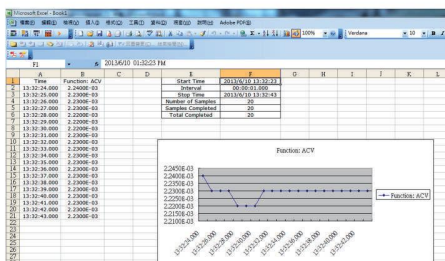

For GDM-8246 users, the GDM-8300 Series also provides a complete command compatibility (SYSTEM\LANG\COMP). Users can replace machines through the simple setting of the GDM-8300 Series without worrying the extra cost to modify the existing program and the delay of production time.

The GDM-8300 Series provides free USB protocol connection software-Excel ADDIns for users' easy access. After installing the

software, Microsoft Excel will establish Marco for users to directly control the setting of the GDM-8300 Series to record the results of the measurements. The recorded data will be synchronously transformed into graphic displays via Excel drawing function that not only eliminates the cost and time of developing programs but also overcomes the compatibility issue of different programming languages.

SPECIFICATIONS *1*2

DC CHARACTERISTICS

DC VOLTAGE

Range(*3)	Resolution	Input Resistance	Accuracy 1 Year (23°C±5°C)
500.00mV	10μV	10MΩ or >10GΩ	0.02 + 4
5.0000V	100μV	10MΩ or >10GΩ	0.02 + 4
50.000V	1mV	11.1MΩ	0.02 + 4
500.00V	10mV	10.1MΩ	0.02 + 4
1000.0V	100mV	10MΩ	0.02 + 4

RESISTANCE

Range(*3)	Resolution	Test Current	Accuracy 1 Year (23°C±5°C)
500.00Ω	10mΩ	0.83mA	0.10 + 5 (*4)
5.0000kΩ	100mΩ	0.83mA	0.10 + 3 (*4)
50.000kΩ	1Ω	83μA	0.10 + 3
500.00kΩ	10Ω	8.3μA	0.10 + 3
5.0000MΩ	100Ω	830nA	0.10 + 3
50.000MΩ	1kΩ	560nA//10MΩ	0.30 + 3

DC CURRENT

Range(*3)	Resolution	Burden Voltage	Accuracy 1 Year (23°C±5°C)
500.00μA	10nA	0.06Vmax.	0.05 + 5
5.0000mA	100nA	0.6Vmax.	0.05 + 4
50.000mA	1μA	0.14Vmax.	0.05 + 4
500.00mA	10μA	1.4Vmax.	0.10 + 4
5.0000A	100μA	0.5Vmax.	0.25 + 5
10.000A	1mA	0.8Vmax.	0.25 + 5

CONTINUITY

Range(*3)	Resolution	Test Current	Accuracy 1 Year (23°C±5°C)
5000.0Ω	100mΩ	0.83mA	0.10 + 5

DIODE TEST (*7)

Range(*3)	Resolution	Test Current	Accuracy 1 Year (23°C±5°C)
5.0000V	100μV	0.83mA	0.05 + 5

CAPACITANCE

Range(*3)	Resolution	Test Current	Accuracy 1 Year (23°C±5°C)
5.000nF : 0.5~1nF	0.001nF	8.3μA	2.00 + 20
5.000nF : 1~5nF	0.001nF	8.3μA	2.00 + 10
50.00nF : 5~10nF	0.01nF	8.3μA	2.00 + 30
50.00nF : 10~50nF	0.01nF	8.3μA	2.00 + 10
500.0nF	0.1nF	83μA	2.00 + 4
5.000μF	1nF	0.56mA	2.00 + 4
50.00μF	10nF	0.83mA	2.00 + 4

FREQUENCY AND PERIOD CHARACTERISTICS

FREQUENCY / PERIOD

Range	Accuracy 1 Year (23°C±5°C)
10Hz ~ 500Hz	0.01 + 5
500Hz ~ 500kHz	0.01 + 3
500kHz ~ 1MHz	0.01 + 5

General

Display	VFD, Two Colors Display
Interface	USB device, USB Host (GDM-8342 only)
Power Source	AC 100 V / 120 V / 220 V / 240 V ±10%, 50-60Hz
Power Consumption	Max. 15VA
Dimensions & Weight	265(W) x 107(H) x 302(D) mm, approx. 2.9kg

ORDERING INFORMATION

GDM-8342 with GPIB	50000 counts Dual Measurement Multimeter with USB Host/Device and opt.01 GPIB
GDM-8342	50000 counts Dual Measurement Multimeter with USB Host/Device
GDM-8341	50000 counts Dual Measurement Multimeter with USB Device

ACCESSORIES

Safety Instruction Sheet x 1, Power cord x 1, Test lead GTL-207 x 1, CD x 1
(including complete user manual, USB driver and PC software)

Global Headquarters

GOOD WILL INSTRUMENT CO., LTD.

No.7-1, Jhongsing Road, Tucheng Dist., New Taipei City 236, Taiwan
T +886-2-2268-0389 F +886-2-2268-0639
E-mail: marketing@goodwill.com.tw

China Subsidiary

GOOD WILL INSTRUMENT (SUZHOU) CO., LTD.

No. 521, Zhujiang Road, Snd, Suzhou Jiangsu 215011 China
T +86-512-6661-7177 F +86-512-6661-7277
E-mail: marketing@instek.com.cn

Malaysia Subsidiary

GOOD WILL INSTRUMENT (M) SDN. BHD.

27, Persiaran Mahsuri 1/1, Sunway Tunas,
11900 Bayan Lepas, Penang, Malaysia
T +604-6309988 F +604-6309989
E-mail: sales@goodwill.com.my

U.S.A. Subsidiary

INSTEK AMERICA CORP.

3661 Walnut Avenue Chino, CA 91710, U.S.A.
T +1-909-5918358 F +1-909-5912280
E-mail: sales@instekamerica.com

Japan Subsidiary

INSTEK JAPAN CORPORATION

2F DSM Shin-Yokohama Bldg, 2-6-3, Shin Yokohama, Kouhoku-ku,
Yokohama, Kanagawa 222-0033 Japan
T +81-45-476-5650 F +81-45-476-5653
E-mail: info@instek.co.jp

Korea Subsidiary

GOOD WILL INSTRUMENT KOREA CO., LTD.

#1406, Ace Hightech-City B/D 1Dong,
Mullae-Dong 3Ga 55-20, Yeongduengpo-Gu, Seoul, Korea
T +82-2-3439-2205 F +82-2-3439-2207
E-mail: gwinstek@gwinstek.co.kr

AC CHARACTERISTICS

True RMS AC (or AC+DC – AC Coupled) Voltage (*5*6)

Range(*3)	Resolution	Frequency	Accuracy 1 Year (23°C±5°C)
500.00mV	10μV	30Hz ~ 50Hz 50Hz ~ 10kHz 10kHz ~ 30kHz 30kHz ~ 100kHz	1.00 + 40 0.50 + 40 2.00 + 60 3.00 + 120
5.0000V	100μV	30Hz ~ 50Hz 50Hz ~ 10kHz 10kHz ~ 30kHz 30kHz ~ 100kHz	1.00 + 20 0.35 + 15 1.00 + 20 3.00 + 50
50.000V	1mV	30Hz ~ 50Hz 50Hz ~ 10kHz 10kHz ~ 30kHz 30kHz ~ 100kHz	1.00 + 20 0.35 + 15 1.00 + 20 3.00 + 50
500.00V	10mV	30Hz ~ 50Hz 50Hz ~ 10kHz 10kHz ~ 30kHz 30kHz ~ 100kHz	---- 0.50 + 15 1.00 + 20 3.00 + 50
750.0V	100mV	30Hz ~ 50Hz 50Hz ~ 10kHz 10kHz ~ 30kHz 30kHz ~ 100kHz	---- 0.50 + 15 ---- ----

True RMS AC (or AC+DC – AC Coupled) Current (*5*6)

Range(*3)	Resolution	Frequency	Accuracy 1 Year (23°C±5°C)
500.00μA	10nA	30Hz ~ 50Hz 50Hz ~ 2kHz 2kHz ~ 5kHz 5kHz ~ 20kHz	1.50 + 50 0.50 + 40 1.50 + 50 3.00 + 75
5.0000mA	100nA	30Hz ~ 50Hz 50Hz ~ 2kHz 2kHz ~ 5kHz 5kHz ~ 20kHz	1.50 + 40 0.50 + 20 1.50 + 40 3.00 + 60
50.000mA	1μA	30Hz ~ 50Hz 50Hz ~ 2kHz 2kHz ~ 5kHz 5kHz ~ 20kHz	1.50 + 40 0.50 + 20 1.50 + 40 3.00 + 60
500.00mA	10μA	30Hz ~ 50Hz 50Hz ~ 2kHz 2kHz ~ 5kHz 5kHz ~ 20kHz	1.50 + 40 0.50 + 20 1.50 + 40 3.00 + 60
5.0000A	100μA	30Hz ~ 50Hz 50Hz ~ 2kHz	2.00 + 40 0.50 + 30
10.000A	1mA	30 ~ 50Hz 50Hz ~ 2kHz	2.00 + 40 0.50 + 30

TEMPERATURE CHARACTERISTICS

THERMOCOUPLES

Type	Range	Resolution	Accuracy(*7) 1 Year (23°C±5°C)
J / T / K	-200 °C ~ +300 °C	0.1 °C	2 °C

Note: The specifications apply when the DMM is warmed up for at least 30 minutes and operates in slow rate.

1. All specifications are ensured only under main (1st) display.
2. Accuracy : ± (% of reading + digits)
3. 2% overrange on all ranges, except 10A is 20% overrange.
4. REL function is on.
5. The accuracy of AC+DC is equal to AC with 10 more digits added.
6. AC Characteristics are for sinewave input > 5% of range.
7. Specifications do not include probe accuracy.

Specifications subject to change without notice.

DM-8300GD1BH

OPTION

Opt.1 GPIB Interface

OPTIONAL ACCESSORIES

GTL-205 Temperature probe adaptor with thermocouple
(K-type), Approx. 1000mm

GTL-246 USB Cable, A-B type, Approx. 1200mm

GTL-251 GPIB-USB-HS (high Speed)

GW INSTEK

Simply Reliable

www.gwinstek.com