

Signal lamp with integrated LED, 5 mm, protruding LED, lamp red, 28 Volt, Solder terminal



fields of application

- Measurement-control-regulation
- Electrical engineering
- Mechanical and system engineering
- Signalling systems
- Model construction

description

Signal lamps with integrated LED, mounting hole diameter 5 mm

technical data

➤ general

Property of bezel / mushroom	transparent
Luminous element color	red
illuminated	Yes
Packaging unit	10 pcs.
net weight	0.5 g
Degree of protection, front side, according to DIN EN 60529	IP40
MOQ order	10 pcs.
RoHS compliant	Yes
REACH compliant	Yes

direct links

- [RAFI eCatalog](#)

➤ mounting diameters

Mounting hole	5 mm
Mounting depth	18 mm
Installation height	3 mm
Collar dimension	5.8 mm

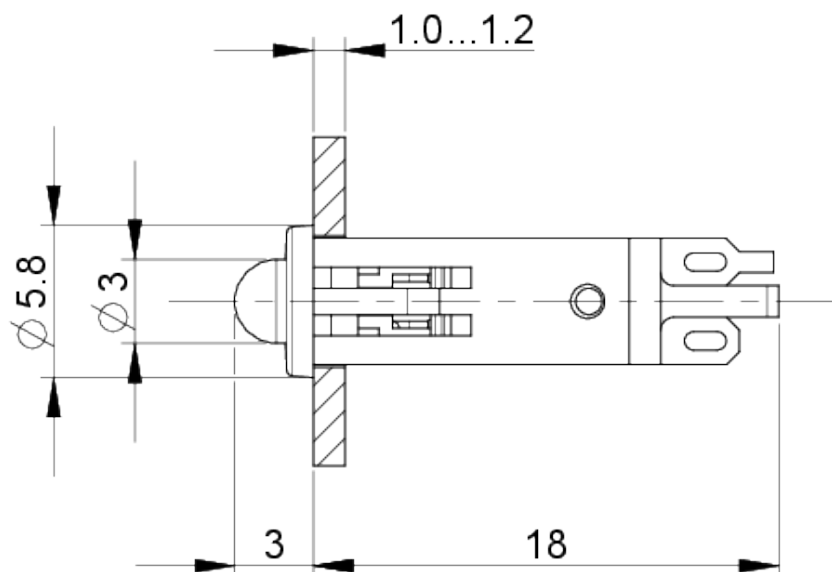
➤ mechanical data

Fixing	Pushing into mounting hole
Terminal on the rear	Solder terminal
Solderability	Yes

➤ electrical data

Operating voltage of the luminous element, min.	24 V
---	------

Operating voltage of the luminous element, max. 28 V

drawings**Dimensioned drawing****Mounting hole drawing**