
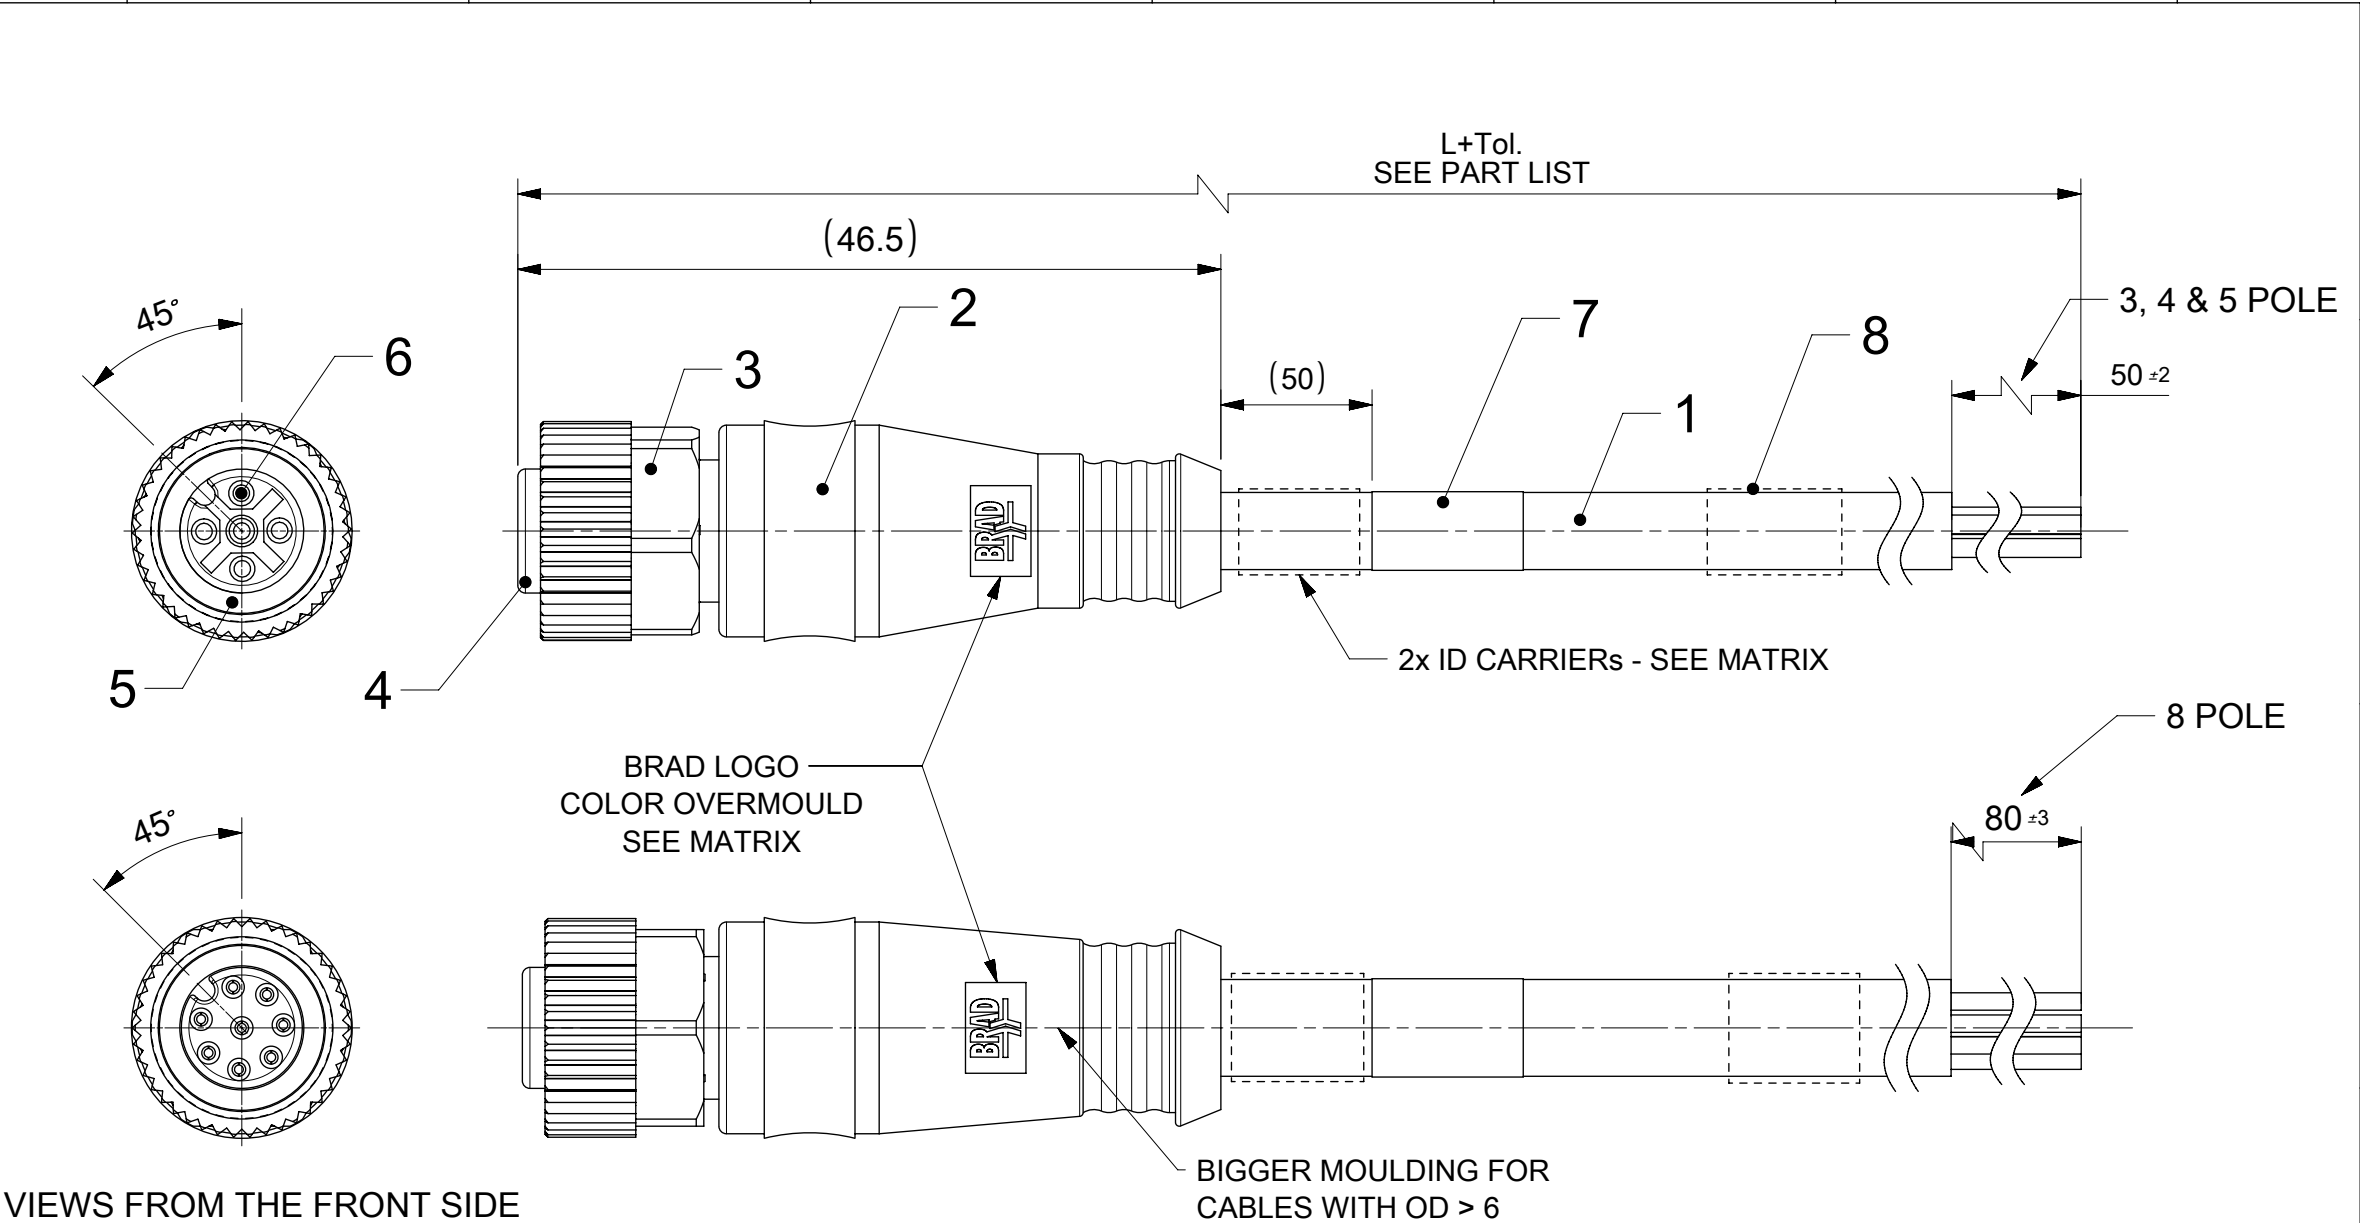


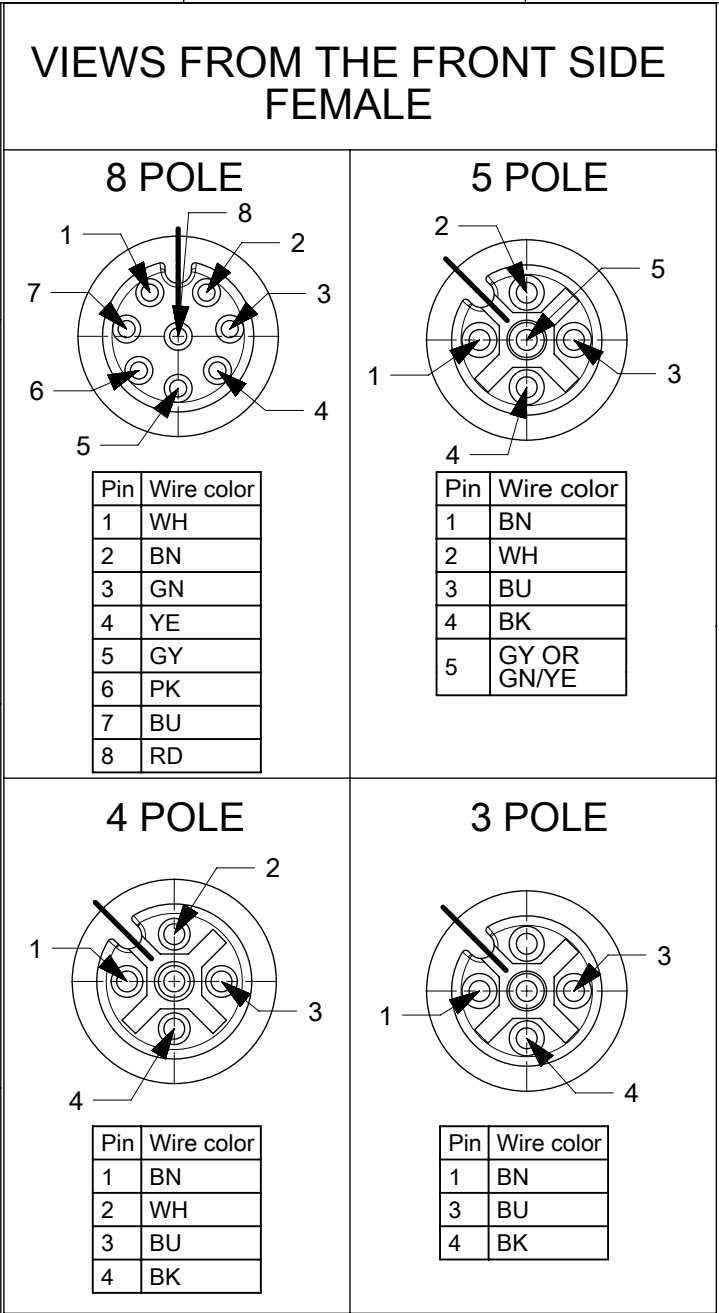

NOTES:

TEMPERATURE RANGE : SEE CABLE LIST

RATED VOLTAGE: 3, 4 contacts : 250V
5 contacts : 60V
8 contacts : 30V

RATED CURRENT: 3, 4, 5 contacts : 4A
8 contacts : 2A

INSULATION RESISTANCE: 10⁸ Ω MIN.

MATING CYCLES: MIN. 100


ENVIRONMENTAL:PROTECTION: IP67 IN MATED AND LOCKED POSITION

BILL OF MATERIAL





8	0/2	I/D CARRIER	-	-
7	1	LABEL	VINYL	YELLOW
6	3/4/5/8	CONTACTS	BRASS	GOLD OVER Ni-PLATED
5	1	GASKET	FPM	RED
4	1	FEMALE INSERT	PUR	BLACK
3	1	COUPLING NUT	BRASS	Ni-PLATED
2	-	OVERMOULD	TPU	BLACK
1	-	CABLE	SEE CABLE LIST	SEE CABLE LIST
ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH/COLOR

FUNCTIONAL SYMBOLS FA=0 FE=0 FV=0 DIVISIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	CURRENT REV DESC: NEW P/N ADDED			
	DIMENSION UNITS mm	SCALE 2:1	molex CSE M12 XP AC FE STR WSOR XM SE UNSH BK PRODUCT CUSTOMER DRAWING		
	GENERAL TOLERANCES (UNLESS SPECIFIED)				
	ANGULAR TOL ± 1.0 °				
	4 PLACES ±				
3 PLACES ±		EC NO: 801104		2024/10/14	
2 PLACES ± 0.05		DRWN: RSCHIEBER		2024/10/14	
1 PLACE ± 0.3		CHK'D: RSILLER		2024/10/14	
0 PLACES ± 0.5		APPR: RSILLER		2024/10/14	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION	DRAWING A3-SIZE	SERIES 120065	INITIAL REVISION: DRWN: SSM APPR: RSILLER 2021/12/16 2022/02/28
MATERIAL NUMBER SEE PART LIST			CUSTOMER GENERAL MARKET	DOCUMENT NUMBER 1200652251	DOC TYPE PSD
SHEET NUMBER 1 OF 3			DOC PART 000		
REVISION B2					

NOTES:
RATED VOLTAGE:
3, 4 contacts 250V
5 contacts 60V
8 contacts 30V
RATED CURRENT:
3, 4, 5 contacts 4A
8 contacts 2A
PROTECTION CLASS: IP 67

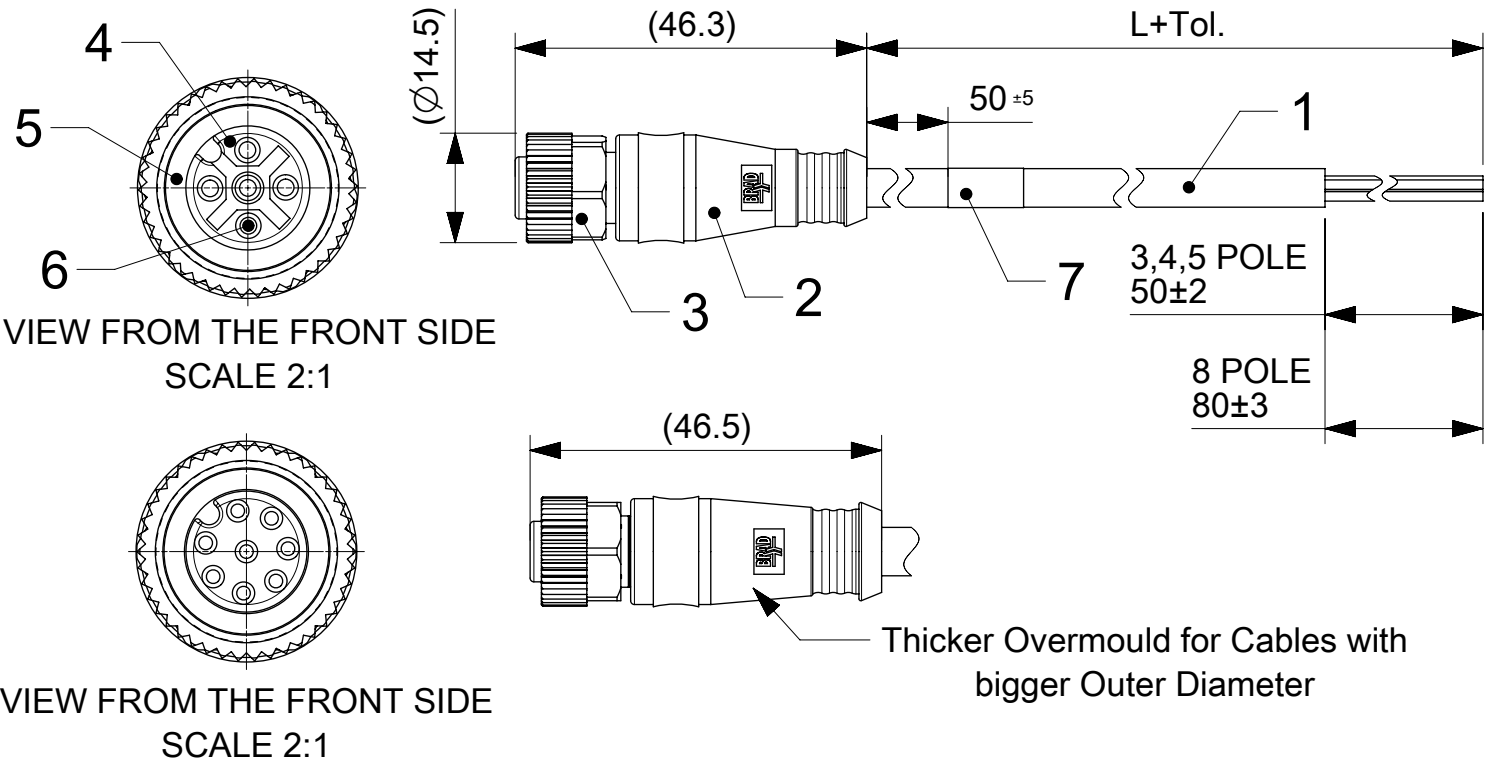

CONTACTS POSITION FRONT VIEW:

	3 CONTACTS	4 CONTACTS	5 CONTACTS	8 CONTACTS																																																
FEMALE																																																				
CONNECTIONS	<table><tr><th>PIN</th><th>WIRE</th></tr><tr><td>1</td><td>BROWN</td></tr><tr><td>3</td><td>BLUE</td></tr><tr><td>4</td><td>BLACK</td></tr></table>	PIN	WIRE	1	BROWN	3	BLUE	4	BLACK	<table><tr><th>PIN</th><th>WIRE</th></tr><tr><td>1</td><td>BROWN</td></tr><tr><td>2</td><td>WHITE</td></tr><tr><td>3</td><td>BLUE</td></tr><tr><td>4</td><td>BLACK</td></tr></table>	PIN	WIRE	1	BROWN	2	WHITE	3	BLUE	4	BLACK	<table><tr><th>PIN</th><th>WIRE</th></tr><tr><td>1</td><td>BROWN</td></tr><tr><td>2</td><td>WHITE</td></tr><tr><td>3</td><td>BLUE</td></tr><tr><td>4</td><td>BLACK</td></tr><tr><td>5</td><td>GREY OR GREEN/YELLOW</td></tr></table>	PIN	WIRE	1	BROWN	2	WHITE	3	BLUE	4	BLACK	5	GREY OR GREEN/YELLOW	<table><tr><th>PIN</th><th>WIRE</th></tr><tr><td>1</td><td>WHITE</td></tr><tr><td>2</td><td>BROWN</td></tr><tr><td>3</td><td>GREEN</td></tr><tr><td>4</td><td>YELLOW</td></tr><tr><td>5</td><td>GREY</td></tr><tr><td>6</td><td>PINK</td></tr><tr><td>7</td><td>BLUE</td></tr><tr><td>8</td><td>RED</td></tr></table>	PIN	WIRE	1	WHITE	2	BROWN	3	GREEN	4	YELLOW	5	GREY	6	PINK	7	BLUE	8	RED
PIN	WIRE																																																			
1	BROWN																																																			
3	BLUE																																																			
4	BLACK																																																			
PIN	WIRE																																																			
1	BROWN																																																			
2	WHITE																																																			
3	BLUE																																																			
4	BLACK																																																			
PIN	WIRE																																																			
1	BROWN																																																			
2	WHITE																																																			
3	BLUE																																																			
4	BLACK																																																			
5	GREY OR GREEN/YELLOW																																																			
PIN	WIRE																																																			
1	WHITE																																																			
2	BROWN																																																			
3	GREEN																																																			
4	YELLOW																																																			
5	GREY																																																			
6	PINK																																																			
7	BLUE																																																			
8	RED																																																			

FOR OPTION SEE - NUMERICAL CODE - ON SHEET 2

7	1	LABEL YE	VINYL	-
6	3/4/5/8	CONTACT FE	BRASS	GOLD OVER Ni-PLATED
5	1	GASKET RD	FPM	-
4	1	INSERT M12 FE XP BK	PUR	-
3	1	COUPLING NUT M12 FE	SEE SHEET 2	SEE SHEET 2
2	-	OVERMOULDING	SEE SHEET 2	SEE SHEET 2
1	-	CABLE	SEE SHEET 2	-
ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION														
	DIMENSION UNITS		SCALE		CURRENT REV DESC: STANDARDIZATION			molex CSE M12 XP AC FE STR WSOR XM SE UNSH							
	mm		1:1												
	GENERAL TOLERANCES (UNLESS SPECIFIED)														
ANGULAR TOL ± °															
DIVISIONAL SYMBOLS	4 PLACES		±		EC NO: 681756			PRODUCT CUSTOMER DRAWING							
	3 PLACES		±		DRWN: MKOWALCZYK01 2021/10/18										
	2 PLACES		±		CHK'D: ALEKSP3 2021/10/18										
	1 PLACE		±		APPR: KMARCINIAK01 2021/10/18			DOCUMENT NUMBER 1200652251							
	0 PLACES		±		INITIAL REVISION:						DOC TYPE PSD				
					DRWN: AKONDRACIUK 2016/11/26									DOC PART 00P	
					APPR: MIWASIECZKO 2016/12/06			REVISION B2							
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION		DRAWING A3-SIZE					SERIES 120065		MATERIAL NUMBER SEE PART LIST		CUSTOMER

ENGINEERING NO - NUMERICAL CODE (Available parts see PART LIST table. Other parts available upon request).

8

0

X

0

0

0

B

X

X

M

X

X

X

X

88 = M12x1
SINGLE ENDED

POLES:
3 = 3 POLES
4 = 4 POLES
5 = 5 POLES
8 = 8 POLES

HEADER:
000 = PLUG FEMALE STRARIGHT

CABLE TYPE:
SEE TABLE


UNIT:
M = METER

LENGTH:
EXAMPLE:
010 = 1 m
050 = 5 m
100 = 10 m

Overmold color:
Blank (Standard)=Black
A=Grey / G=Black / Y=Yellow / R=Red

Coupling Nut:
Blank (Standard)=Knurled/Hex Brass, Ni Plated
5=Knurled Derlin
7=Knurled Brass Ni Plated, Teflon Coated

H= 2 pcs. of I/D Carrier PVC Transparent
(Cables B36 always with
2 pcs. I/D Carrier)

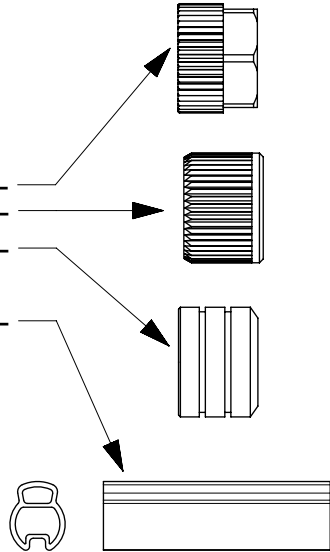

CABLE INFORMATION (for more information see Cable Data Sheet).

CABLE TYPE	NO. OF WIRES	CROSS SECTION	CABLE JACKET	UL	CSA	STATIC: TEMP. / BENDING RADIUS	DYNAMIC: TEMP. / BENDING RADIUS	DRAG CHAIN: TEMP. / BENDING RADIUS	DRAG CHAIN	CABLE SPEC. DRAWING
B30	3 / 4 / 5	0.34mm²	TPU Black	UL 21215/758	C22.2 I/II A/B 80°/600V	-40°C to +90°C 5xO.D.	-25°C to +80°C 7.5xO.D.	-5°C to +60°C 7.5xO.D.	up to 5 000 000 cycles at temp 20°C	SD-120209-001
B33	4 / 5	0.34mm²	TPU Gray							SD-120209-001
B36	4 / 5	0.34mm²	TPU Orange							SD-120209-001
B39	5	0.75mm²	TPU Gray							n/a
B41	8	0.25mm²	TPU Black							SD-120209-006
B42	5	0.34mm²	TPU Black							SD-120209-001
B49	8	0.25mm²	TPU Orange							SD-120209-006
B55	3 / 4 / 5	0.34mm²	TPU Yellow							n/a

TABLE OF LENGTH TOLERANCES				
OVER	UP TO AND INCLUDING	TOLERANCE		
0	1000	+40 0		
1000	5000	+60 0		
5000	10000	+80 0		
10000	20000	+140 0		
20000	30000	+160 0		
30000	>	+1% OF LENGTH		
DOCUMENT STATUS	P1	RELEASE DATE	2021/10/18	12:08:57

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									
FUNCTIONAL SYMBOLS		DIMENSION UNITS		SCALE		CURRENT REV DESC: STANDARDIZATION			
E A = 0		mm		1:1		molex			
E = 0		GENERAL TOLERANCES (UNLESS SPECIFIED)							
E = 0		ANGULAR TOL ± °				CSE M12 XP AC FE STR WSOR XM SE UNSH			
DIVISIONAL SYMBOLS		4 PLACES ±		EC NO: 681756		PRODUCT CUSTOMER DRAWING			
		3 PLACES ±		DRWN: MKOWALCZYK01 2021/10/18					
		2 PLACES ±		CHK'D: ALEKSP3 2021/10/18					
		1 PLACE ±		APPR: KMARCINIAK01 2021/10/18					
		0 PLACES ±		INITIAL REVISION:		DOCUMENT NUMBER			
		DRWN: AKONDRACIUK 2016/11/26		1200652251					
		APPR: MIWASIECZKO 2016/12/06		DOC TYPE					
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION		PSD		DOC PART	
				DRAWING		00P		REVISION	
				SERIES		B2			
				A3-SIZE		SHEET NUMBER			
				120065		SEE PART LIST		2 OF 2	