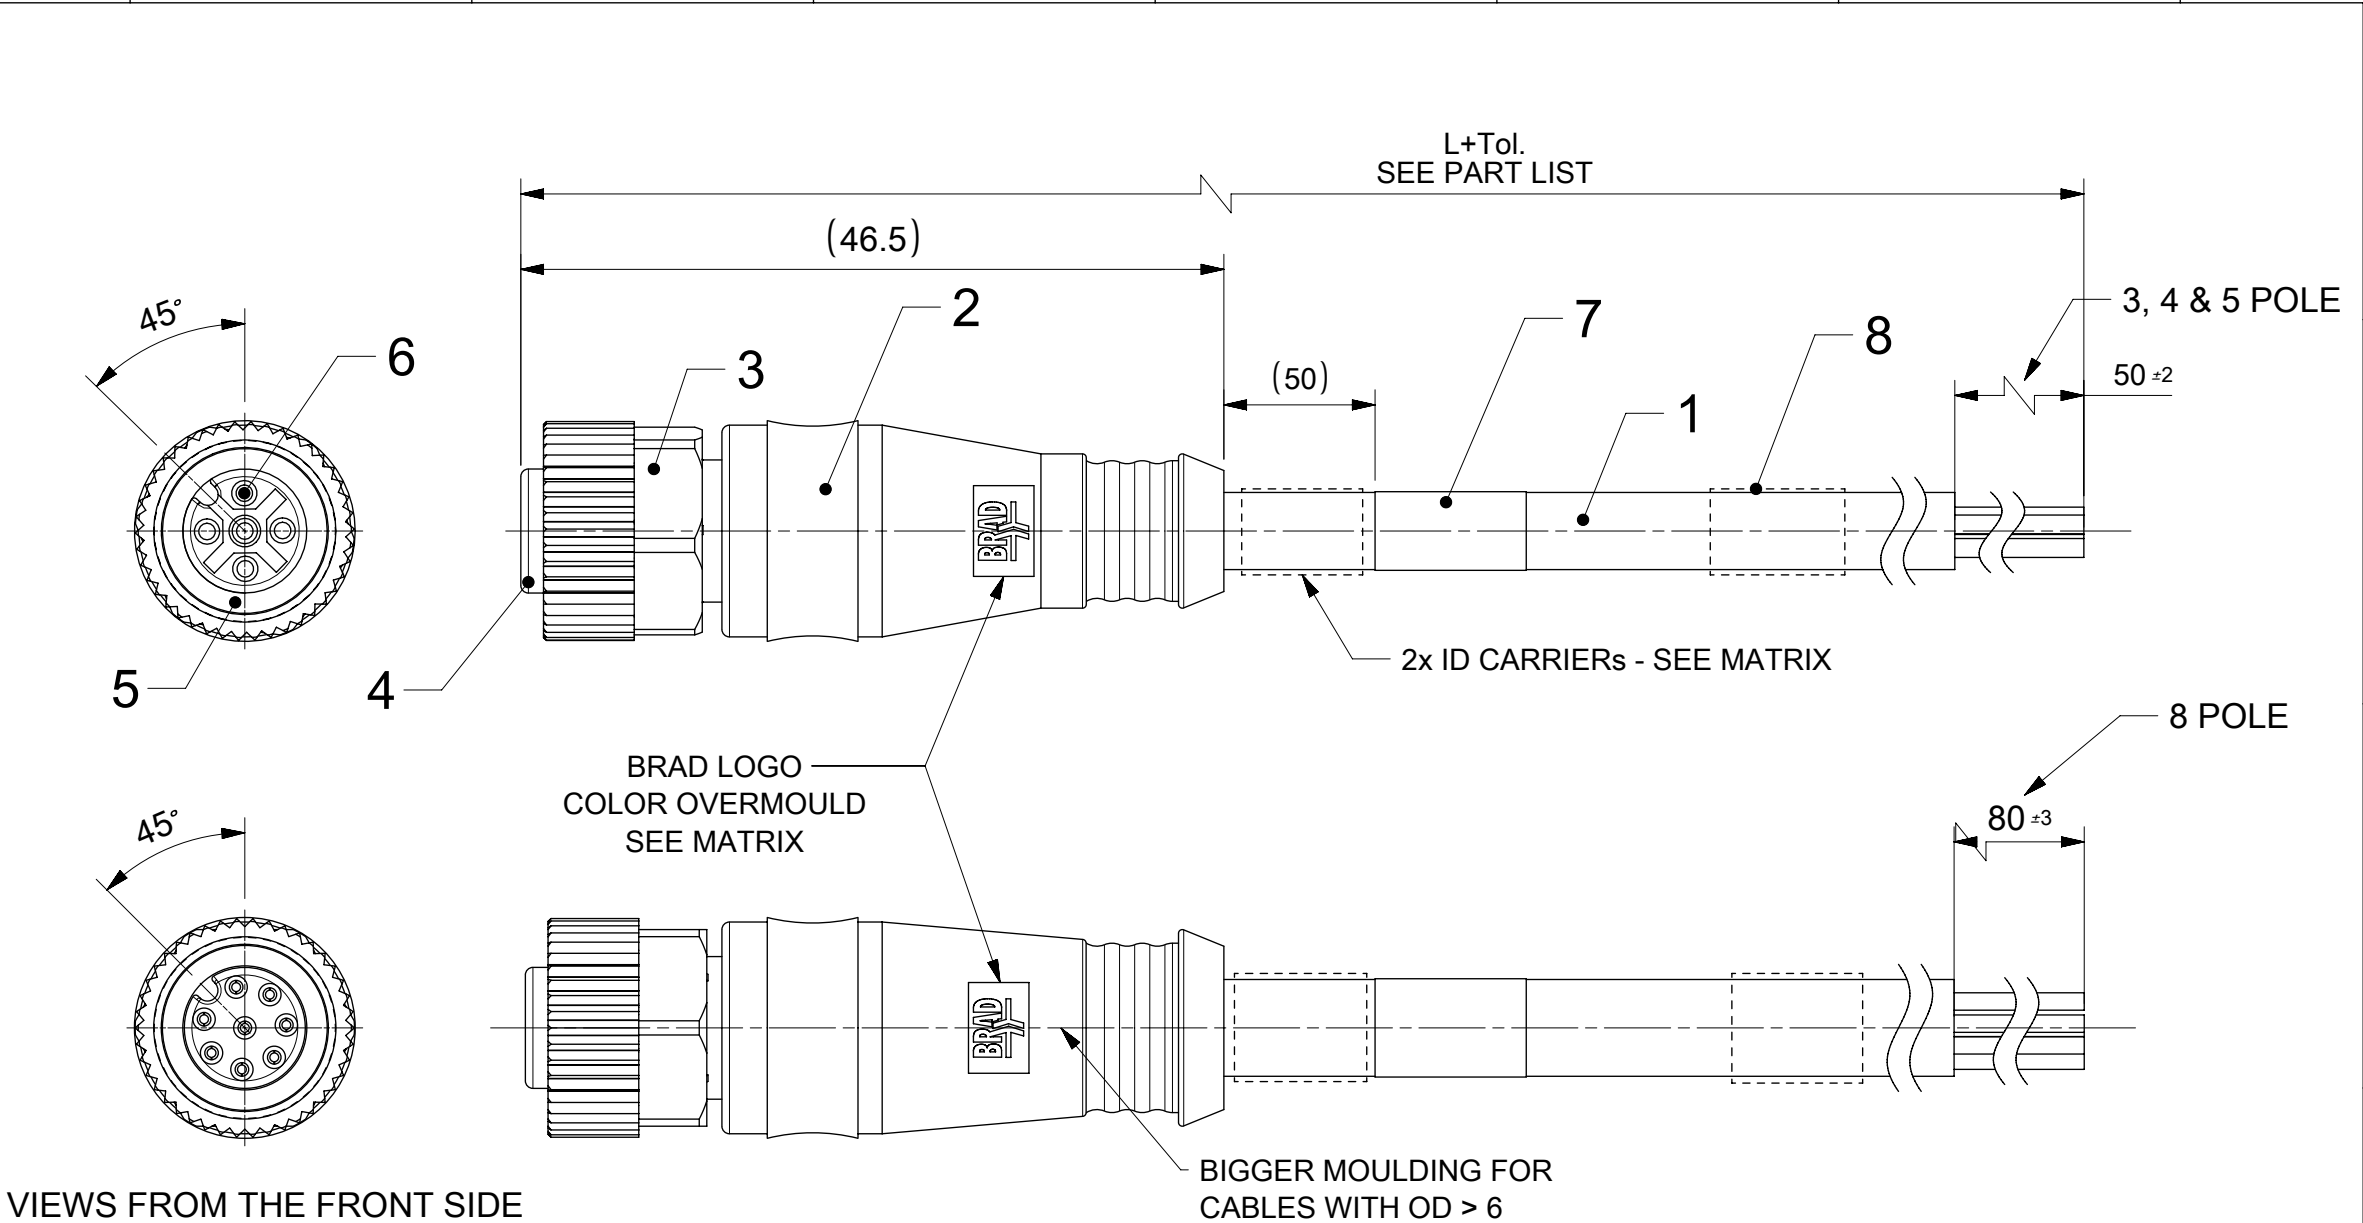
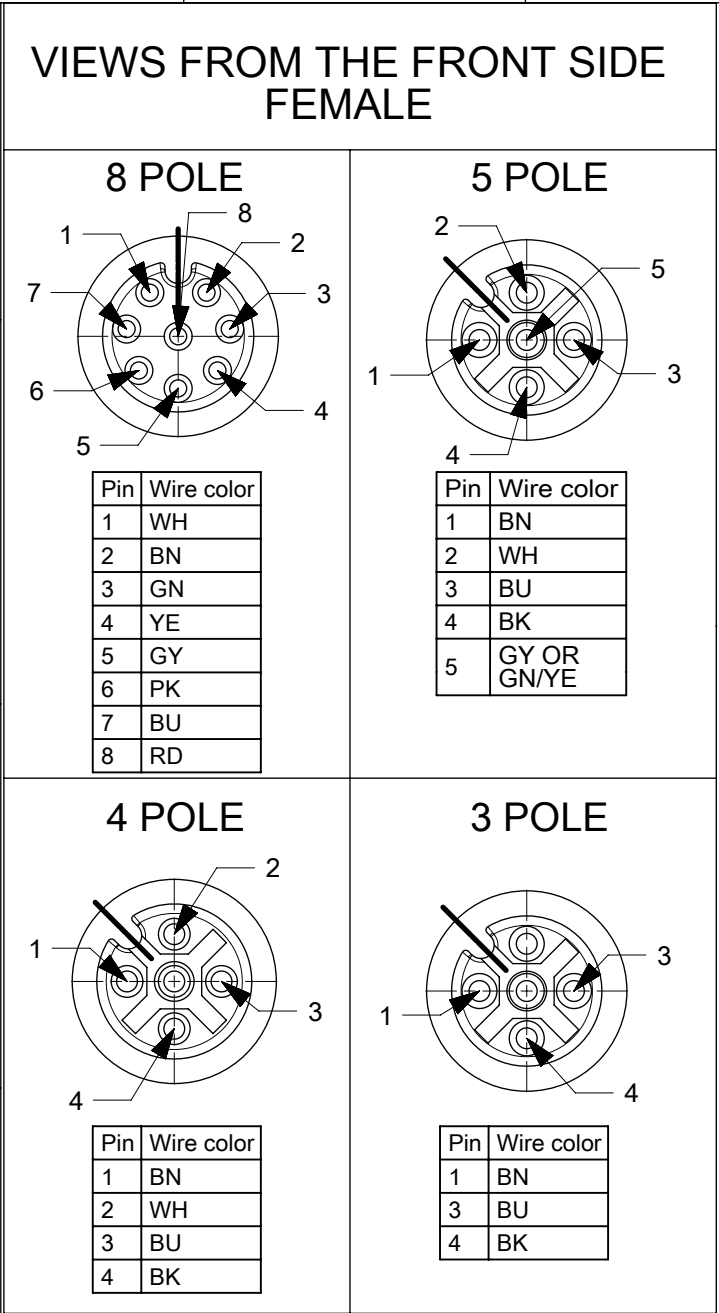




NOTES:

TEMPERATURE RANGE : SEE CABLE LIST

RATED VOLTAGE: 3, 4 contacts : 250V

5 contacts : 60V

8 contacts : 30V

RATED CURRENT: 3, 4, 5 contacts : 4A

8 contacts : 2A

INSULATION RESISTANCE: 10⁸ Ω MIN.

MATING CYCLES: MIN. 100

ENVIRONMENTAL:PROTECTION: IP67 IN MATED AND LOCKED POSITION

BILL OF MATERIAL

ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH/COLOR
8	0/2	I/D CARRIER	-	-
7	1	LABEL	VINYL	YELLOW
6	3/4/5/8	CONTACTS	BRASS	GOLD OVER Ni-PLATED
5	1	GASKET	FPM	RED
4	1	FEMALE INSERT	PUR	BLACK
3	1	COUPLING NUT	BRASS	Ni-PLATED
2	-	OVERMOULD	TPU	BLACK
1	-	CABLE	SEE CABLE LIST	SEE CABLE LIST

FUNCTIONAL SYMBOLS

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

CURRENT REV DESC: NEW P/N ADDED

EC NO: 801104

DRWN: RSCHIEBER 2024/10/14

CHK'D: RSILLER 2024/10/14

APPR: RSILLER 2024/10/14

INITIAL REVISION:

DRWN: SSM 2021/12/16

APPR: RSILLER 2022/02/28

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

THIRD ANGLE PROJECTION

DRAWING

SERIES

MATERIAL NUMBER

CUSTOMER

SHEET NUMBER

GENERAL TOLERANCES (UNLESS SPECIFIED)

ANGULAR TOL ± 1.0 °

4 PLACES ±

3 PLACES ±

2 PLACES ± 0.05

1 PLACE ± 0.3

0 PLACES ± 0.5

SCALE

2:1

mm

DOCUMENT NUMBER

1200652251

DOC TYPE

PSD

DOC PART

000

REVISION

B2

PRODUCT CUSTOMER DRAWING

A3-SIZE

120065

SEE PART LIST

GENERAL MARKET

1 OF 3

moLEX

CSE M12 XP AC FE STR WSOR XM SE UNSH BK

DOCUMENT STATUS

P1

RELEASE DATE

2024/10/14

10:52:34

8 0 X 0 0 0 B X X X X X X X X

POLES:
3 = 3 POLES
4 = 4 POLES
5 = 5 POLES
8 = 8 POLES

CABLE:
 B30 = 0,34mm², TPU BLACK
 B33 = 0,34mm², TPU GREY
 B36 = 0,34mm², TPU ORANGE
 B39 = 0,75mm², TPU BLACK
 B41 = 0,25mm², TPU BLACK
 B42 = 0,34mm², TPU BLACK
 B49 = 0,25mm², TPU ORANGE
 B55 = 0,34mm², TPU YELLOW

LENGTH:
EXAMPLE:
010 = 1 m
050 = 5 m
100 = 10 m

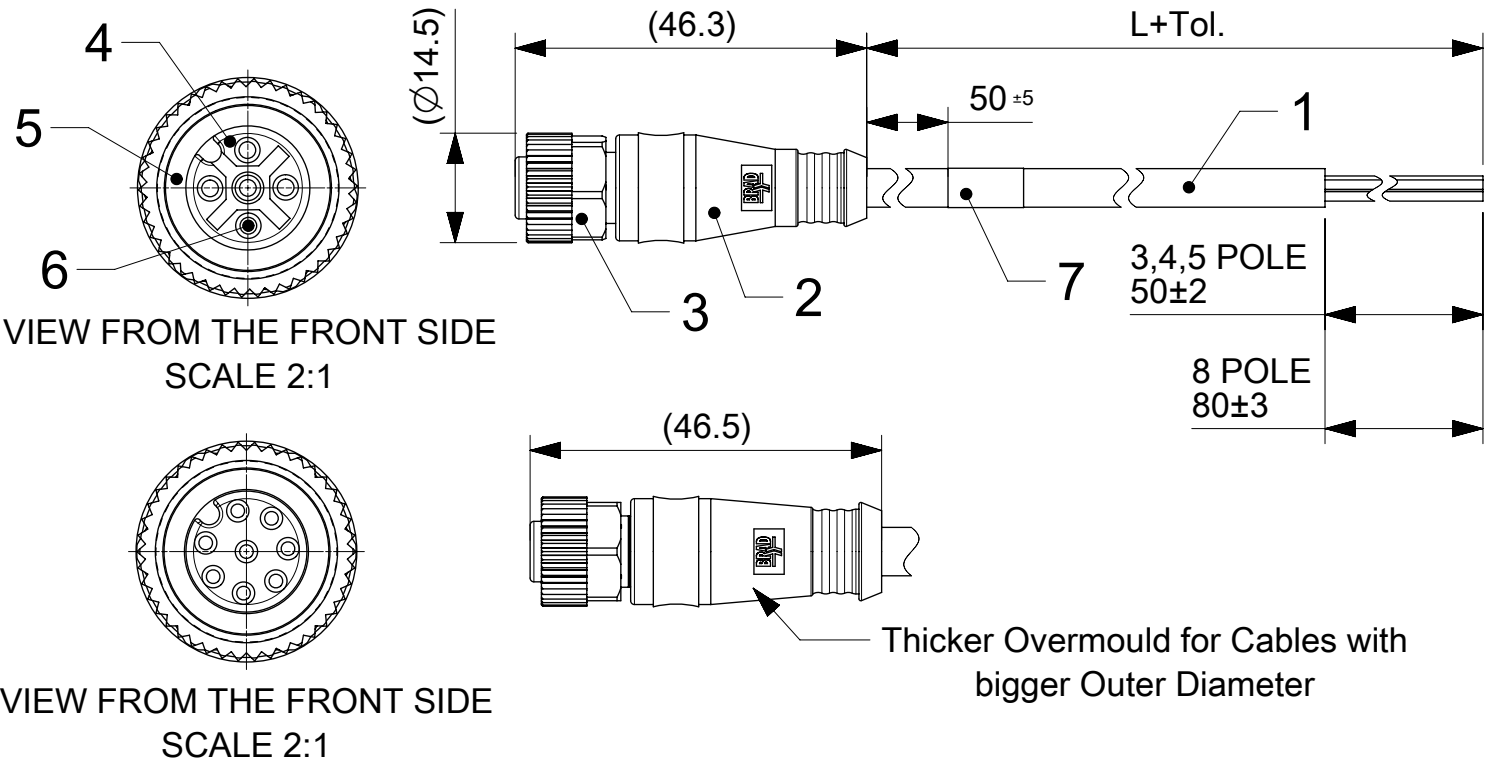
CABLE LIST

CABLE TYPE	NO. OF WIRES	CROSS SECTION	CABLE JACKET	UL 21215	CSA	ISO6722	ISO14572	STATIC: TEMP. / BENDING RADIUS	DYNAMIC: TEMP. / BENDING RADIUS	DRAG CHAIN	OTHER
B30	3 / 4 / 5	0.34mm ²	TPU Black	YES	YES	YES	YES	-40°C to +90°C 5xO.D.	-25°C to +80°C 7.5xO.D.	up to 5 000 000 cycles at temp 20°C	WELD SLAG RESISTANCE
B41	8	0.25mm ²	TPU Black								
B42	5	0.34mm ²	TPU Black								
B33	4 / 5	0.34mm ²	TPU Gray								
B55	4 / 5	0.34mm ²	TPU Yellow								
B36	4 / 5	0.34mm ²	TPU Orange								
B39	5	0.34mm ²	TPU Yellow								





LENGTH	TOLERANCE
0 m - 1 m	+40 mm
>1 m - 5 m	+60 mm
>5 m - 10 m	+80 mm
>10 m - 20 m	+140 mm
>20 m - 30 m	+160 mm
>30 m	+1% length

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION											
	DIMENSION UNITS		SCALE		CURRENT REV DESC: NEW P/N ADDED			molex				
	mm		1:1									
	GENERAL TOLERANCES (UNLESS SPECIFIED)							CSE M12 XP AC FE STR WSOR XM SE UNSH BK				
	ANGULAR TOL ± 1.0°											
	4 PLACES		±		EC NO: 801104			PRODUCT CUSTOMER DRAWING				
	3 PLACES		±		DRWN: RSCHIEBER 2024/10/14							
	2 PLACES		± 0.05		CHK'D: RSILLER 2024/10/14							
	1 PLACE		± 0.3		APPR: RSILLER 2024/10/14			DOCUMENT NUMBER		DOC TYPE	DOC PART	REVISION
	0 PLACES		± 0.5		INITIAL REVISION:			1200652251		PSD	000	B2
1 PLACE		± 0.3		DRWN: SSM 2021/12/16								
0 PLACES		± 0.5		APPR: RSILLER 2022/02/28								
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION		DRAWING	SERIES	MATERIAL NUMBER		CUSTOMER		SHEET NUMBER
						A3-SIZE	120065	SEE PART LIST		GENERAL MARKET		2 OF 3

NOTES:
RATED VOLTAGE:
3, 4 contacts 250V
5 contacts 60V
8 contacts 30V
RATED CURRENT:
3, 4, 5 contacts 4A
8 contacts 2A
PROTECTION CLASS: IP 67



CONTACTS POSITION FRONT VIEW:

	3 CONTACTS	4 CONTACTS	5 CONTACTS	8 CONTACTS																																																
FEMALE																																																				
CONNECTIONS	<table border="1"><thead><tr><th>PIN</th><th>WIRE</th></tr></thead><tbody><tr><td>1</td><td>BROWN</td></tr><tr><td>3</td><td>BLUE</td></tr><tr><td>4</td><td>BLACK</td></tr></tbody></table>	PIN	WIRE	1	BROWN	3	BLUE	4	BLACK	<table border="1"><thead><tr><th>PIN</th><th>WIRE</th></tr></thead><tbody><tr><td>1</td><td>BROWN</td></tr><tr><td>2</td><td>WHITE</td></tr><tr><td>3</td><td>BLUE</td></tr><tr><td>4</td><td>BLACK</td></tr></tbody></table>	PIN	WIRE	1	BROWN	2	WHITE	3	BLUE	4	BLACK	<table border="1"><thead><tr><th>PIN</th><th>WIRE</th></tr></thead><tbody><tr><td>1</td><td>BROWN</td></tr><tr><td>2</td><td>WHITE</td></tr><tr><td>3</td><td>BLUE</td></tr><tr><td>4</td><td>BLACK</td></tr><tr><td>5</td><td>GREY OR GREEN/YELLOW</td></tr></tbody></table>	PIN	WIRE	1	BROWN	2	WHITE	3	BLUE	4	BLACK	5	GREY OR GREEN/YELLOW	<table border="1"><thead><tr><th>PIN</th><th>WIRE</th></tr></thead><tbody><tr><td>1</td><td>WHITE</td></tr><tr><td>2</td><td>BROWN</td></tr><tr><td>3</td><td>GREEN</td></tr><tr><td>4</td><td>YELLOW</td></tr><tr><td>5</td><td>GREY</td></tr><tr><td>6</td><td>PINK</td></tr><tr><td>7</td><td>BLUE</td></tr><tr><td>8</td><td>RED</td></tr></tbody></table>	PIN	WIRE	1	WHITE	2	BROWN	3	GREEN	4	YELLOW	5	GREY	6	PINK	7	BLUE	8	RED
PIN	WIRE																																																			
1	BROWN																																																			
3	BLUE																																																			
4	BLACK																																																			
PIN	WIRE																																																			
1	BROWN																																																			
2	WHITE																																																			
3	BLUE																																																			
4	BLACK																																																			
PIN	WIRE																																																			
1	BROWN																																																			
2	WHITE																																																			
3	BLUE																																																			
4	BLACK																																																			
5	GREY OR GREEN/YELLOW																																																			
PIN	WIRE																																																			
1	WHITE																																																			
2	BROWN																																																			
3	GREEN																																																			
4	YELLOW																																																			
5	GREY																																																			
6	PINK																																																			
7	BLUE																																																			
8	RED																																																			

FOR OPTION SEE - NUMERICAL CODE - ON SHEET 2

7	1	LABEL YE	VINYL	-
6	3/4/5/8	CONTACT FE	BRASS	GOLD OVER Ni-PLATED
5	1	GASKET RD	FPM	-
4	1	INSERT M12 FE XP BK	PUR	-
3	1	COUPLING NUT M12 FE	SEE SHEET 2	SEE SHEET 2
2	-	OVERMOULDING	SEE SHEET 2	SEE SHEET 2
1	-	CABLE	SEE SHEET 2	-
ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH

FUNCTIONAL SYMBOLS

$\nabla_A = 0$

$\nabla_E = 0$

$\nabla_F = 0$

DIVISIONAL SYMBOLS

DIMENSION UNITS

mm

SCALE

1:1

GENERAL TOLERANCES (UNLESS SPECIFIED)

ANGULAR TOL ± °

4 PLACES ±

3 PLACES ±

2 PLACES ±

1 PLACE ±

0 PLACES ±

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

CURRENT REV DESC: STANDARDIZATION

EC NO: 681756

DRWN: MKOWALCZYK01

CHK'D: ALEKSP3

APPR: KMARCINIAK01

INITIAL REVISION:

DRWN: AKONDRACIUK

APPR: MIWASIECZKO

THIRD ANGLE PROJECTION

DRAWING

SERIES

MATERIAL NUMBER

CUSTOMER

SHEET NUMBER

molex

CSE M12 XP AC FE STR WSOR XM SE UNSH

PRODUCT CUSTOMER DRAWING

DOCUMENT NUMBER

1200652251

DOC TYPE

PSD

DOC PART

00P

REVISION

B2

F



D

CA

1

A