
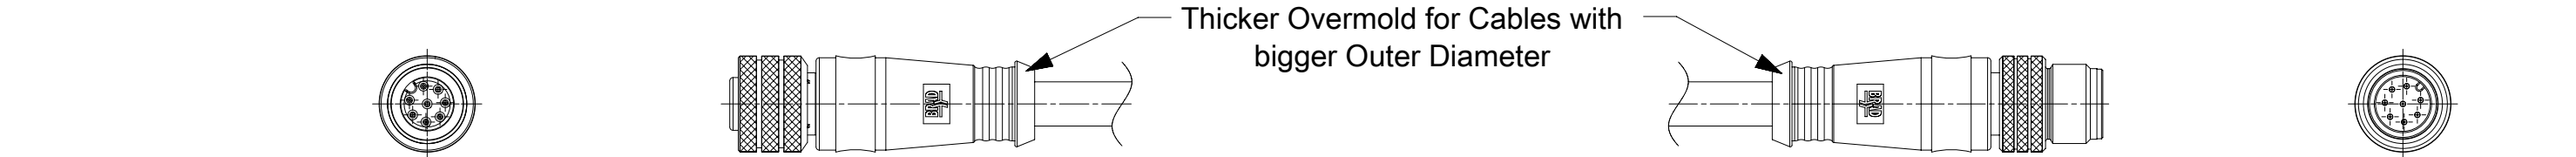


FEMALE PLUG M12 STRAIGHT TO MALE PLUG M12 STRAIGHT

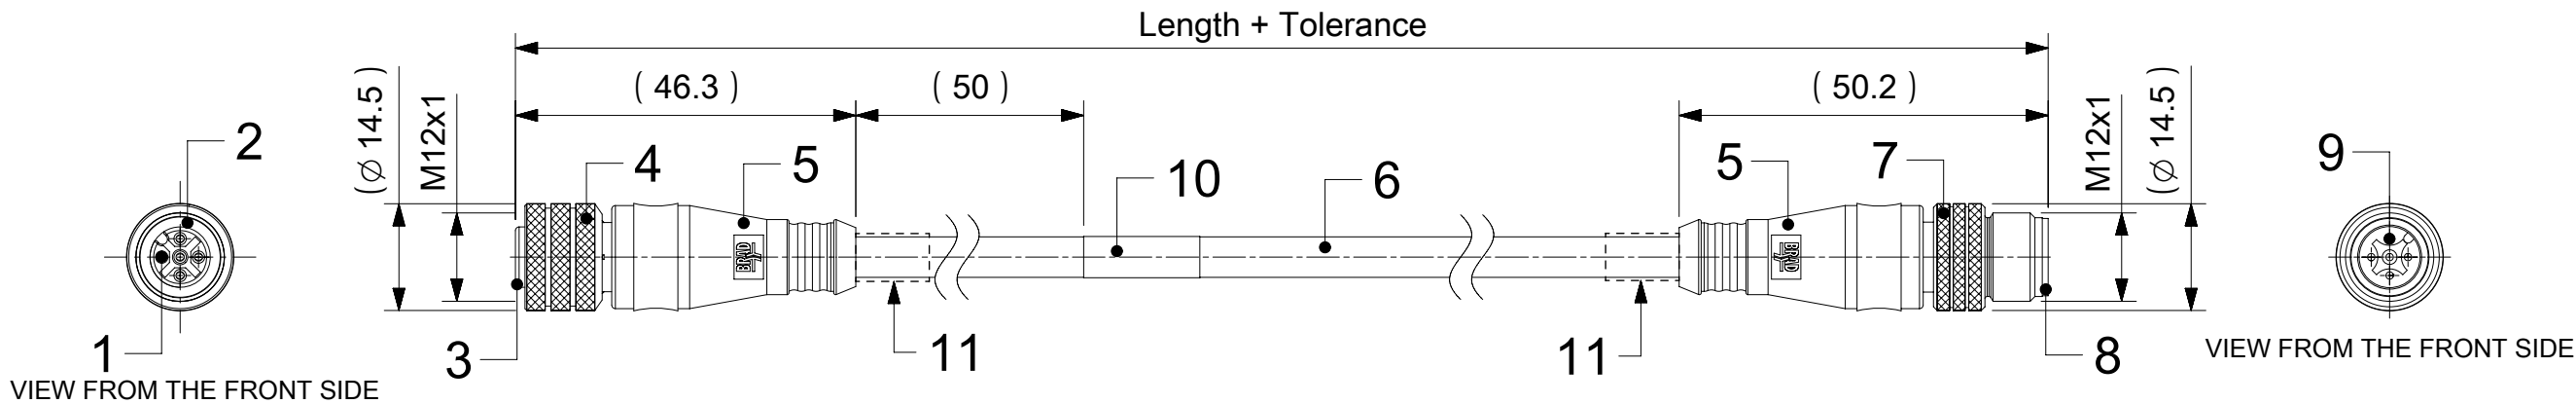

NOTES:


RATED VOLTAGE: 3, 4 contacts 250V per IEC 60664
5 contacts 60V per IEC 60664
5 contacts 250V per UL 2238
8 contacts 30V per IEC 60664

RATED CURRENT: 3, 4, 5 contacts 4A
8 contacts 2A

PROTECTION CLASS: IP 67
TEMPERATURE: -25°C / +85°C

CONTACTS POSITION FRONT VIEW:

	3 CONTACTS		4 CONTACTS		5 CONTACTS		8 CONTACTS	
FEMALE								
MALE								
CONNECTIONS	PIN	WIRE	PIN	WIRE	PIN	WIRE	PIN	WIRE
	1	BROWN	1	BROWN	1	BROWN	1	WHITE
	2	-	2	WHITE	2	WHITE	2	BROWN
	3	BLUE	3	BLUE	3	BLUE	3	GREEN
	4	BLACK	4	BLACK	4	BLACK	4	YELLOW
					5	GREY	5	GREY
							6	PINK
							7	BLUE
CODING REQUIRED TO IEC 61076-2-101								

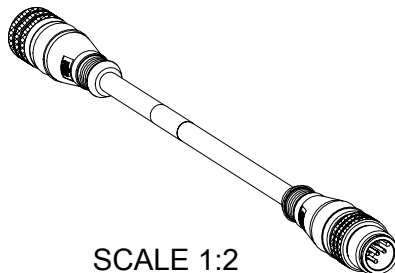

FOR OPTIONS SEE - NUMERICAL CODE - ON SHEET 2

11	SEE SHEET 2	ID CARRIER	PVC	TRANSPARENT
10	1	LABEL YELLOW	VINYL	-
9	3 / 4 / 5 / 8	CONTACT MALE	SEE PART LIST	SELECTIVE GOLD OVER NICKEL
8	1	INSERT MALE BLACK	TPU	-
7	1	COUPLING NUT MALE	-	-
6	-	CABLE	SEE SHEET 2	-
5	-	OVERMOULDING BLACK	TPU	-
4	1	COUPLING NUT FEMALE	-	-
3	1	INSERT FEMALE BLACK	PUR	-
2	1	O-RING RED	FPM	-
1	3 / 4 / 5 / 8	CONTACT FEMALE	SEE PART LIST	SELECTIVE GOLD OVER NICKEL
ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION											
FUNCTIONAL SYMBOLS	DIMENSION UNITS		SCALE		CURRENT REV DESC: NEW P/N'S ADDED TO THE DRAWING 12335						
	mm		1:1								
	GENERAL TOLERANCES (UNLESS SPECIFIED)				molex CSE M12 XP AC FE STR MA STR XM DE PRODUCT CUSTOMER DRAWING DOCUMENT NUMBER 1200668084 DOC TYPE PSD DOC PART 000 REVISION A17						
	ANGULAR TOL ± 1.0 °										
	4 PLACES ±		EC NO: 769491							2023/10/30	
	3 PLACES ±		DRWN: VHANDI							2023/11/21	
	2 PLACES ± 0.05		CHK'D: RSILLER							2023/11/21	
	DIVISIONAL SYMBOLS	1 PLACE ± 0.3		INITIAL REVISION:			2016/09/16				
		0 PLACES ± 0.5		DRWN: JMARSZALEK			2016/12/08				
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION		DRAWING		SERIES			
		A3-SIZE		120066		MATERIAL NUMBER					
						CUSTOMER					
					SEE SHEET 3-4		GENERAL MARKET		SHEET NUMBER		
									1 OF 4		

ENGINEERING NO. - NUMERICAL CODE (Available parts see PART LIST table. Other parts available upon request).

OPTIONS

8	8	X	0	3	0	X	X	X	X	X	X	X	X
---	---	---	---	---	---	---	---	---	---	---	---	---	---

88=Micro-Change
M12x1
Double ended

Contacts:
3=3 Contacts
4=4 Contacts
5=5 Contacts
8=8 Contacts

Heads style: 030=Plug Female Straight to Plug Male Straight

Cable type: See Table

Units:
M=Meter
C=Centimeter







Length
Examples:
005=0.5 unit
010=1 unit
100=10 units

Overmold color:
Blank (Standard)=Black
A=Grey / G=Black / Y=Yellow

Coupling Nut:
Blank (Standard) & 3=Knurled Brass Ni Plated
1=Hexagonal Stainless steel _____
5=Knurled Derlin _____
7=Knurled Brass Ni Plated, Teflon Coated _____
8=Type 316 stainless steel _____
9=Knurled / Hexagonal Brass Ni Plated SW13

H= 2 pcs. of I/D Carrier PVC Transparent

COUPLING NUTS
FEMALE MALE



CABLE INFORMATION (for more information see Cable Data Sheet).

CABLE TYPE	NO. OF WIRES	CROSS SECTION	CABLE JACKET	UL	CSA	STATIC: TEMP. / BENDING RADIUS	DYNAMIC: TEMP. / BENDING RADIUS	DRAG CHAIN	SHIELD
E02	3 / 4 / 5 / 8	0.25mm²	PVC BLACK	UL 2464/1729	C22.2 I/II A/B 80°C/300V	-30°C to +80°C, 10xO.D.	-10°C to +80°C, 15xO.D.	-	-
E03	3 / 4 / 5	0.34mm²	PVC BLACK	UL 2464/1729	C22.2 I/II A/B 80°C/300V	-30°C to +80°C, 10xO.D.	-10°C to +80°C, 15xO.D.	-	-
H08	3 / 4 / 5 / 8	0.25mm²	PUR BLACK LS0H	UL 21198/10493	C22.2 I/II A/B 80°C/300V	-40°C to +80°C, 5xO.D.	-25°C to +80°C, 10xO.D.	2 000 000 cycles at 20°C, Temp. range +5°C to +60°C	-
H09	3 / 4 / 5	0.34mm²	PUR BLACK LS0H	UL 21198/10493	C22.2 I/II A/B 80°C/300V	-40°C to +80°C, 5xO.D.	-25°C to +80°C, 10xO.D.	2 000 000 cycles at 20°C, Temp. range +5°C to +60°C	-
P02	3 / 4 / 5 / 8	0.25mm²	PUR / PVC BLACK	-	-	-30°C to +80°C, 7xO.D.	-5°C to +80°C, 15xO.D.	-	-
P03	3 / 4 / 5	0.34mm²	PUR / PVC BLACK	-	-	-30°C to +80°C, 7xO.D.	-5°C to +80°C, 15xO.D.	-	-

CABLE LENGTH TOLERANCES		
OVER [mm]	UP TO AND INCLUDING [mm]	TOLERANCES [mm]
0	305	+19
305	915	+45
915	1830	+56
1830	3660	+89
3660	7320	+165
7320	14640	+317
14640	30500	+610
30500	>	+2% OF FINISHED LENGTH

FUNCTIONAL SYMBOLS F A = 0 F C = 0 F E = 0 DIVISIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION														
	DIMENSION UNITS		SCALE		CURRENT REV DESC: NEW P/N'S ADDED TO THE DRAWING 12335 EC NO: 769491 DRWN: VHANDI2023/10/30 CHK'D: RSILLER2023/11/21 APPR: RSILLER2023/11/21					molex CSE M12 XP AC FE STR MA STR XM DE					
	mm		1:1												
	GENERAL TOLERANCES (UNLESS SPECIFIED)														
	ANGULAR TOL ± 1.0°									PRODUCT CUSTOMER DRAWING					
	4 PLACES		±												
	3 PLACES		±		DOCUMENT NUMBER		DOC TYPE		DOC PART		REVISION				
	2 PLACES		± 0.05		1200668084		PSD		000		A17				
	1 PLACE		± 0.3												
	0 PLACES		± 0.5												
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION		DRAWING		SERIES		MATERIAL NUMBER		CUSTOMER		SHEET NUMBER	
						A3-SIZE		120066		SEE SHEET 3-4		GENERAL MARKET		2 OF 4	

DOCUMENT STATUS	P1	RELEASE DATE	2023/11/21	12:03:28
-----------------	----	--------------	------------	----------

	10	9	8	7	6	5	4	3	2	1		
	PART LIST											
F	MOLEX PN Engineering No. Length			MOLEX PN Engineering No. Length			MOLEX PN Engineering No. Length			MOLEX PN Engineering No. Length		
	3P CABLE E03			1200669423 884030E03M025 2.5m			1200668981 885030E03M040H 4m			4P CABLE H08		
	1200070081	883030E03M006	0.6m	1200070475	884030E03M030	3m	1200071948	885030E03M040	4m	1200668689	884030H08M030	3m
	1200669153	883030E03M0101	1m	1200669424	884030E03M035	3.5m	1200070969	885030E03M050	5m	8P CABLE H08		
	1200070083	883030E03M010	1m	1200072092	884030E03M040	4m	1200668982	885030E03M060H	6m	1200669314	888030H08C250	0.25m
E	1200071006	883030E03M020H	2m	1200072172	884030E03M050H	5m	1200072697	885030E03M060	6m	1200669310	888030H08M005	0.5m
	1200070086	883030E03M0205	2m	1200071707	884030E03M0505	5m	1200668652	885030E03M070	7m	1200669311	888030H08M008	0.8m
	1200070085	883030E03M020	2m	1200072744	884030E03M0501	5m	1200668980	885030E03M080H	8m	1200668491	888030H08M010	1m
	1200070088	883030E03M030	3m	1200060049	884030E03M050	5m	1200071583	885030E03M080	8m	1200669312	888030H08M012	1.2m
	1200668370	883030E03M040	4m	1200071596	884030E03M060	6m	1200669905	885030E03M085H	8.5m	1200669313	888030H08M015	1.5m
	1200070092	883030E03M0505	5m	1200668786	884030E03M070	7m	1200669906	885030E03M090H	9m	1200669117	888030H08M040	4m
	1200070091	883030E03M050	5m	1200669508	884030E03M080	8m	1200668347	885030E03M100	10m	1200669212	888030H08M050	5m
	1200669511	883030E03M060	6m	1200071881	884030E03M1005	10m	1200669907	885030E03M110H	11m	1200669958	888030H08M070	7.0m
	1200669499	883030E03M080	8m	1200070476	884030E03M100	10m	1200668674	885030E03M150	15m	1200668774	888030H08M100	10m
	1200070093	883030E03M100	10m	1200072544	884030E03M120	12m	1200668487	885030E03M200	20m	1200669161	888030H08M150	15m
	1200669500	883030E03M120	12m	1200669509	884030E03M140	14m	1200668521	885030E03M250	25m	1200669437	888030H08M200	20m
	1200669501	883030E03M140	14m	1200071793	884030E03M1501	15m	1200668784	885030E03M300	30m	1200669955	888030H08M300	30m
	1200669502	883030E03M160	16m	1200071715	884030E03M150	15m	1200668785	885030E03M350	35m			
	1200669510	884030E03M160	16m	1200669883	884030E03M180H	18m	3P CABLE E02			3P CABLE H09		
	1200669503	883030E03M180	18m	1200071199	884030E03M200	20m	1200668662	883030E02M006	0.6m	1200668373	883030H09M006	0.6m
	1200669522	883030E03M200	20m	1200668718	884030E03M250	25m	1200669609	883030E02M0201	2m	1200668374	883030H09M010	1m
	1200669523	883030E03M250	25m	1200668719	884030E03M300	30m	1200669561	883030E02M050	5m	1200669134	883030H09M015	1.5m
	4P CABLE E03			1200668								

FORMAT: master-tb-prod-A3
REVISION: J1
DATE: 2021/05/01

PART LIST

MOLEX PN	Engineering No.	Length
1200668174	884030H09M030	3m
1200668380	884030H09M040	4m
1200668244	884030H09M050	5m
1200668550	884030H09M050H	5m
1200668737	884030H09M055	5.5m
1200669926	884030H09M065H	6.5m
1200669927	884030H09M070H	7m
1200669931	884030H09M075H	7.5m
1200669932	884030H09M080H	8m
1200668381	884030H09M100	10m
5P CABLE H09		
1200668509	885030H09M006	0.6m
1200668497	885030H09M010	1m
1200669756	885030H09M015H	1.5m
1200668500	885030H09M020	2m
1200669762	885030H09M020H	2m
1200669757	885030H09M025H	2.5m
1200668510	885030H09M030	3m
1200669763	885030H09M030H	3m
1200668853	885030H09M040	4m
1200668501	885030H09M050	5m
1200668854	885030H09M060	6m
1200668502	885030H09M092	9.2m
1200668511	885030H09M100	10m
1200668683	885030H09M150	15m
1200668684	885030H09M200	20m
8P CABLE P02		
1200661455	888030P02M005	0.5m
1200660579	888030P02M010	1m
1200668803	888030P02M010H	1m
1200660585	888030P02M100	10m
1200668807	888030P02M100H	10m
1200669353	888030P02M130	13m
1200660586	888030P02M150	15m
1200668808	888030P02M150H	15m
1200668327	888030P02M200	20m
1200668809	888030P02M200H	20m

MOLEX PN	Engineering No.	Length
1200660580	888030P02M020	2m
1200668804	888030P02M020H	2m
1200660581	888030P02M030	3m
1200660582	888030P02M040	4m
1200660583	888030P02M050	5m
1200668806	888030P02M050H	5m
1200660584	888030P02M060	6m
1200668352	888030P02M250	25m
1200669133	888030P02M3008	30m
1200668810	888030P02M350H	35m
1200668544	888030P02M500	50m
3P CABLE P03		
1200070102	883030P03M003	0.3m
1200070104	883030P03M006	0.6m
1200660498	883030P03M010	1m
1200071123	883030P03M010H	1m
1200668691	883030P03M010YH	1m
1200660500	883030P03M020	2m
1200071131	883030P03M0201	2m
1200071114	883030P03M020H	2m
1200668690	883030P03M020YH	2m
1200660501	883030P03M030	3m
1200071122	883030P03M030H	3m
1200668646	883030P03M030HY	3m
1200072104	883030P03M040	4m
1200660502	883030P03M050	5m
1200071047	883030P03M050H	5m
1200668713	883030P03M050HY	5m
1200071288	883030P03M060	6m
1200070105	883030P03M100	10m
1200071273	883030P03M100H	10m
1200668712	883030P03M100HY	10m
1200072658	883030P03M120	12m
1200071053	883030P03M150	15m


MOLEX PN	Engineering No.	Length
4P CABLE P03		
1200070486	884030P03M003	0.3m
1200668687	884030P03M005	0.5m
1200070487	884030P03M006	0.6m
1200070488	884030P03M010	1m
1200072762	884030P03M0101	1m
1200072649	884030P03M0105	1m
1200060050	884030P03M015	1.5m
1200070489	884030P03M020	2m
1200072763	884030P03M0201	2m
1200668754	884030P03M020H	2m
1200060051	884030P03M030	3m
1200072764	884030P03M0301	3m
1200072803	884030P03M040	4m
1200070490	884030P03M050	5m
1200072650	884030P03M0505	5m
1200072010	884030P03M050H	5m
1200072804	884030P03M060	6m
1200669717	884030P03M080	8m
1200668815	884030P03M0805	8m
1200071029	884030P03M100	10m
1200665031	884030P03M100H	10m
1200668720	884030P03M150	15m
1200072105	884030P03M200	20m
1200668721	884030P03M250	25m
1200668722	884030P03M300	30m
1200668723	884030P03M350	35m
1200668724	884030P03M400	40m
5P CABLE P03		
1200668903	885030P03C130	0.13m
1200073083	885030P03M006	0.6m
1200668794	885030P03M006H	0.6m
1200071947	885030P03M007	0.7m
1200668084	885030P03M010	1m
1200668795	885030P03M010H	1m
1200668765	885030P03M015	1.5m
1200070596	885030P03M020	2m
1200668602	885030P03M020G	2m

[illegible]

NOTES:

* - Part No. with Yellow PVC overmolding

DOCUMENT STATUS	P1	RELEASE DATE	2023/11/21	12:03:28
-----------------	----	--------------	------------	----------

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION														
	DIMENSION UNITS		SCALE		CURRENT REV DESC: NEW P/N'S ADDED TO THE DRAWING 12335			molex							
	mm		1:1												
	GENERAL TOLERANCES (UNLESS SPECIFIED)							CSE M12 XP AC FE STR MA STR XM DE							
	ANGULAR TOL ± 1.0 °														
	4 PLACES		±												
DIVISIONAL SYMBOLS	3 PLACES		±		EC NO: 769491			PRODUCT CUSTOMER DRAWING							
	2 PLACES		± 0.05		DRWN: VHANDI 2023/10/30										
	1 PLACE		± 0.3		CHK'D: RSILLER 2023/11/21										
	0 PLACES		± 0.5		APPR: RSILLER 2023/11/21										
	INITIAL REVISION:				DOCUMENT NUMBER				DOC TYPE	DOC PART	REVISION				
1 PLACE		± 0.3		DRWN: JMARSZALEK 2016/09/16			1200668084				PSD	000	A17		
0 PLACES		± 0.5		APPR: RSILLER 2016/12/08											
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION		DRAWING		SERIES		MATERIAL NUMBER		CUSTOMER		SHEET NUMBER	
						A3-SIZE		120066		SEE PART LIST		GENERAL MARKET		4 OF 4	