






MALE PLUG M8 STRAIGHT SINGLE ENDED

CONTACT POSITION FRONT VIEW:

3 POLES MALE		4 POLES MALE		5 POLES MALE	
					
PIN	WIRE	PIN	WIRE	PIN	WIRE
1	BROWN	1	BROWN	1	BROWN
2	-	2	WHITE	2	WHITE
3	BLUE	3	BLUE	3	BLUE
4	BLACK	4	BLACK	4	BLACK
5	-	5	-	5	GREY



VIEW FROM THE FRONT SIDE

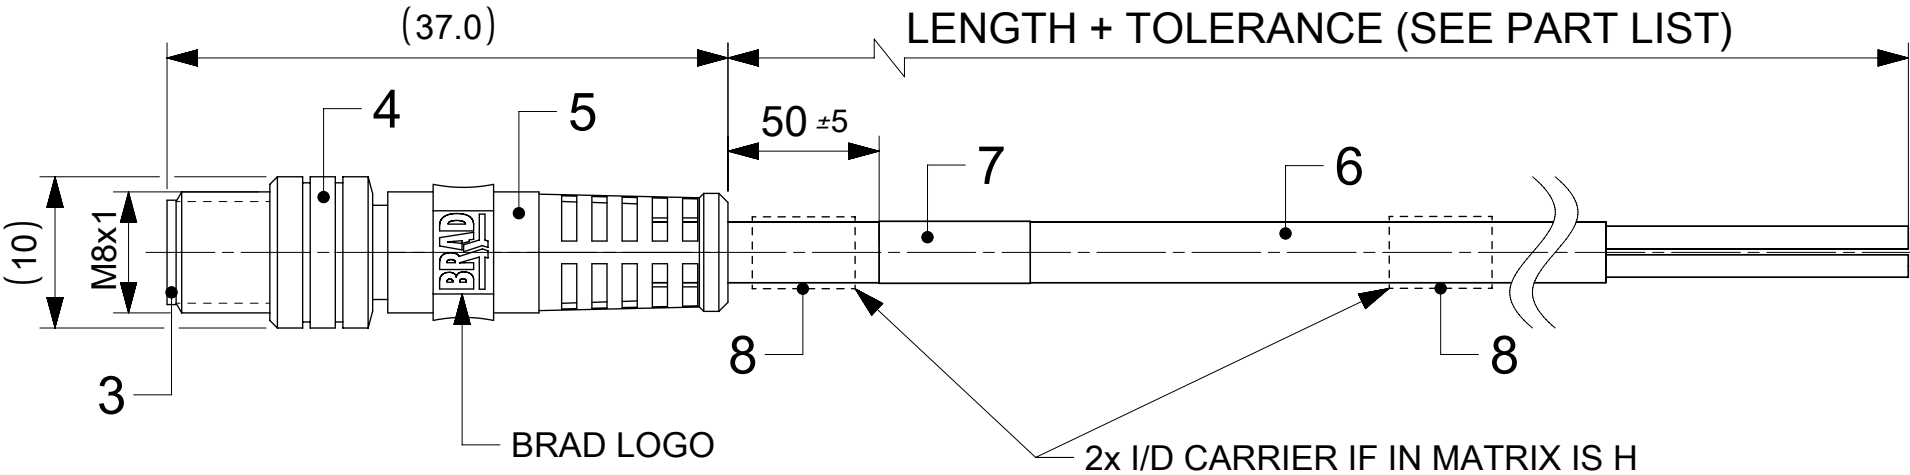


TECHNICAL SPECIFICATION:

CONTACT CURRENT RATING: 3-5 POLES 3 A
VOLTAGE RATING: 3 POLES 60 V
4-5 POLES 30 V
PROTECTION CLASS: IP 67
TEMPERATURE RANGE: -25° C / +80° C
PACKAGING ACCORDING TO PACKAGING SPEC. 1201202000

BILL OF MATERIALS

8	0 / 2	ID CARRIER (SEE MATRIX)	PVC	TRANSPARENT
7	1	LABEL OR PRINTING	VINYL / ---	---
6	-	CABLE	SEE MATRIX	---
5	-	OVERMOULDING	TPU	BLACK
4	1	COUPLING NUT M8 MALE	BRASS	NICKEL
3	1	SLEEVE	BRASS	NICKEL
2	1	INSERT MALE	TPU	BLACK
1	3 / 4 / 5	CONTACT M8 MALE	BRASS	SELECTIVE Au OVER Ni
ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH / COLOR
DOCUMENT STATUS	P1	RELEASE DATE	2024/11/11	13:43:58



SCALE 1:2

FUNCTIONAL SYMBOLS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									
		DIMENSION UNITS		SCALE		CURRENT REV DESC: SORTED/REVISED PART LIST BY CABLE TYPE, LENGTH					
mm		2:1		EC NO: 803942 DRWN: RSCHIEBER CHK'D: RSILLER APPR: RSILLER 2024/11/06 2024/11/11 2024/11/11 INITIAL REVISION: DRWN: RSCHIEBER APPR: RSILLER 2021/11/23 2021/11/12 2021/11/25							
GENERAL TOLERANCES (UNLESS SPECIFIED)											
ANGULAR TOL ± 1.0 °											
4 PLACES		±									
3 PLACES		±									
2 PLACES		± 0.05									
1 PLACE		± 0.3									
0 PLACES		± 0.5									
DIVISIONAL SYMBOLS		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION		DRAWING		SERIES	
						A3-SIZE		120086			

