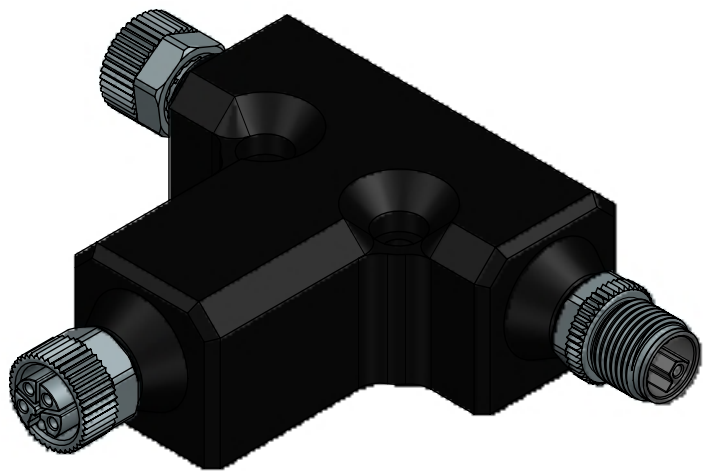
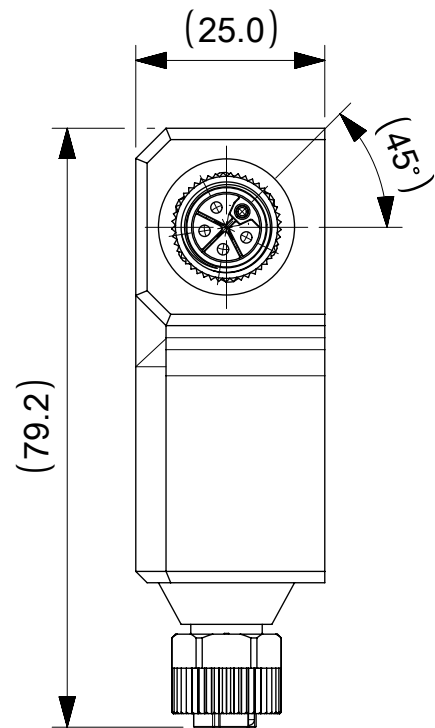
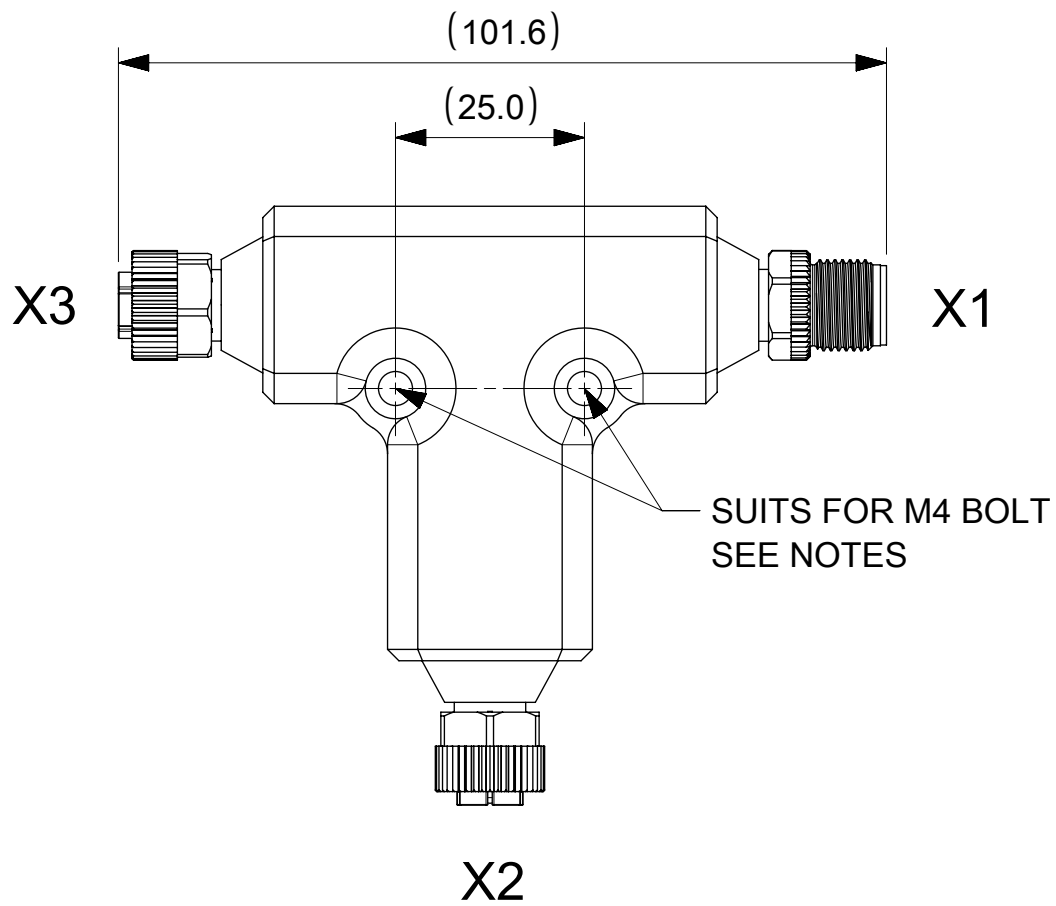
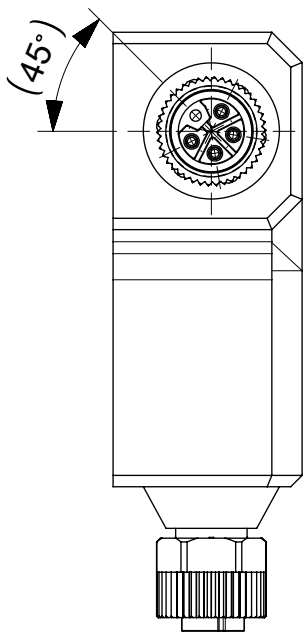


CUSTOMER PRODUCT APPROVAL

APPROVED BY: _____

DATE: _____

MUST BE SIGNED AND RETURNED BEFORE PRODUCTION WILL BEGIN

TECHNICAL SPECIFICATION:	
VOLTAGE RATING	63V AC/DC
CURRENT RATING	16A according IEC 14A according UL
PROTECTION	IP67
OPERATING TEMPERATURE	-25°C TO +85°C

NOTES:

PART ACCORDING PRODUCT SPEC: 1205040002
PACKAGING SEE PRODUCT SPEC: 1205040002
MAX. TORQUE FOR THE M4 SCREWS 2.5 Nm
BOLT ADHESIVE/THREADLOCKER RECOMMENDED

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	
	DIMENSION UNITS	SCALE
$\nabla_A = 0$	mm	1:1
$\nabla_E = 0$	GENERAL TOLERANCES (UNLESS SPECIFIED)	
$\nabla_F = 0$	ANGULAR TOL	± °
DIVISIONAL SYMBOLS	4 PLACES	±
	3 PLACES	±
	2 PLACES	± 0.05
	1 PLACE	± 0.1
	0 PLACES	± 0.15
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION
		DRAWING
		SERIES
		MATERIAL NUMBER
		CUSTOMER
		SHEET NUMBER

EC NO: 777120	2023/09/28
DRWN: NFRITZEN	2023/09/28
CHK'D: RSILLER	2024/02/14
APPR: RSILLER	2024/02/14
INITIAL REVISION:	
DRWN: NFRITZEN	2021/03/23
APPR: RSILLER	2022/12/05

DOCUMENT NUMBER		DOC TYPE	DOC PART	REVISION
1205040002		PSD	000	A3

A3-SIZE	120504	1205040002	GENERAL MARKET	1 OF 2
---------	--------	------------	----------------	--------

