

Components, RAFIX FS technology, short-travel adapter



fields of application

- Measurement-control-regulation
- Electrical engineering
- Mechanical and system engineering
- Signalling systems
- Vehicle construction
- Agricultural and forestry machinery
- Construction machinery
- Handheld terminals
- Industrial robots

description

The short-travel adapter can be combined with all MICON 5 standard models. The operating life specification applies in combination with MICON 5 variant 1.14.002.101/0000 and 1.14.005.101/0000.

technical data

➤ **general**


illuminated	Yes
Packaging unit	10 pcs.
net weight	1.6 g
Operating life	1,000,000 cycles
B10	1,400,000 cycles
MOQ order	10 pcs.
RoHS compliant	Yes
REACH compliant	Yes

direct links

- [RAFI eCatalog](#)


drawings

PCB drawing

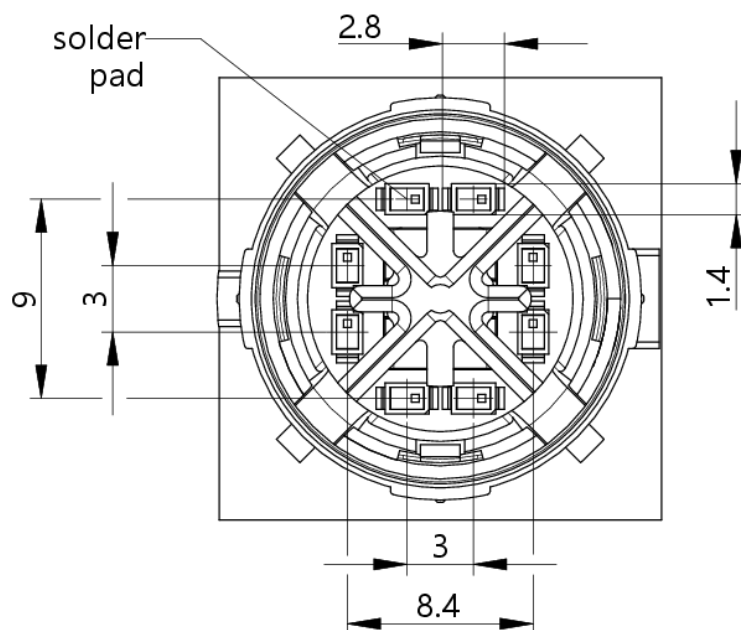


The maximum height of the LED must not exceed 2.4mm

PCB drawing

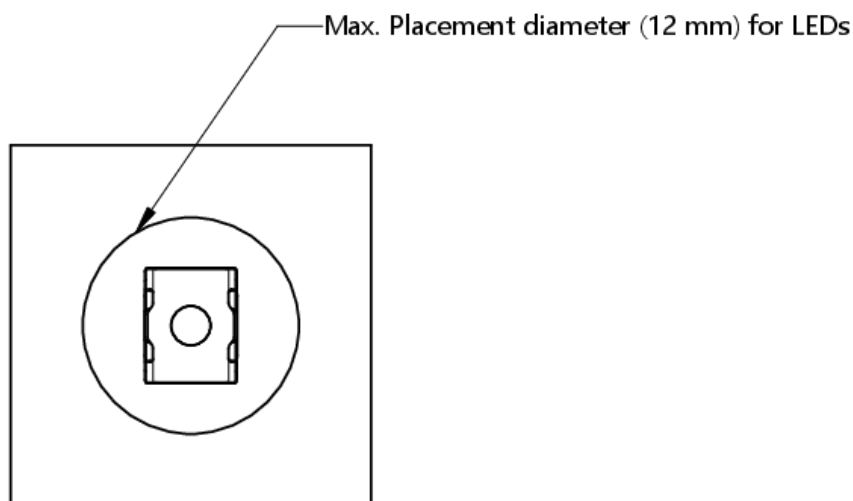

The maximum height of the LED must not exceed 2.4mm

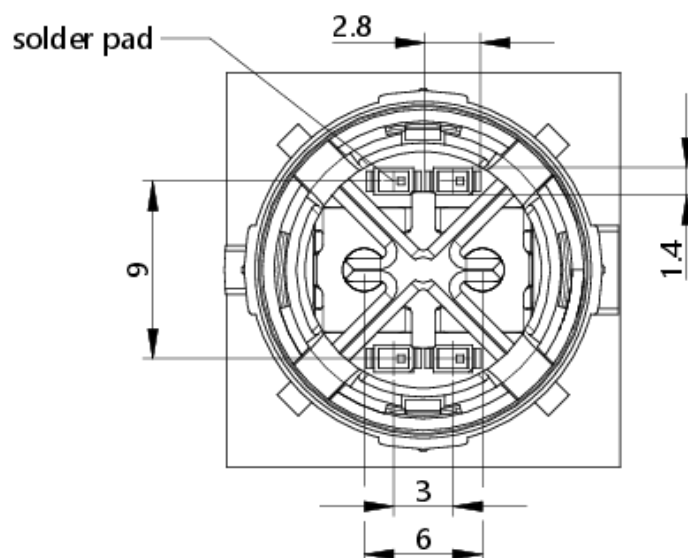PCB drawing

The maximum height of the LED must not exceed 2.4mm

With a redundant structure, the MICON 5 with the part number: 1.14.002.201/0000 must always be used.