
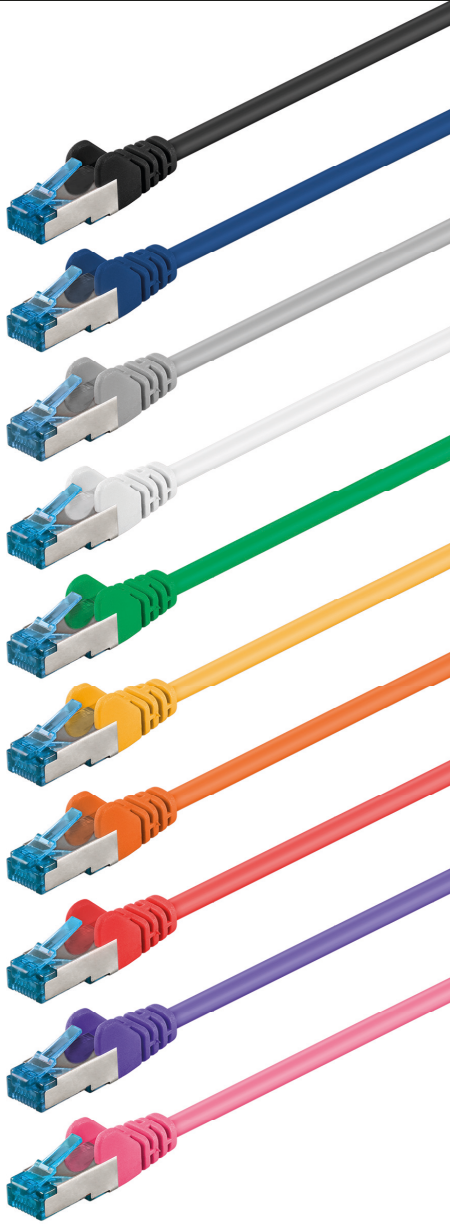
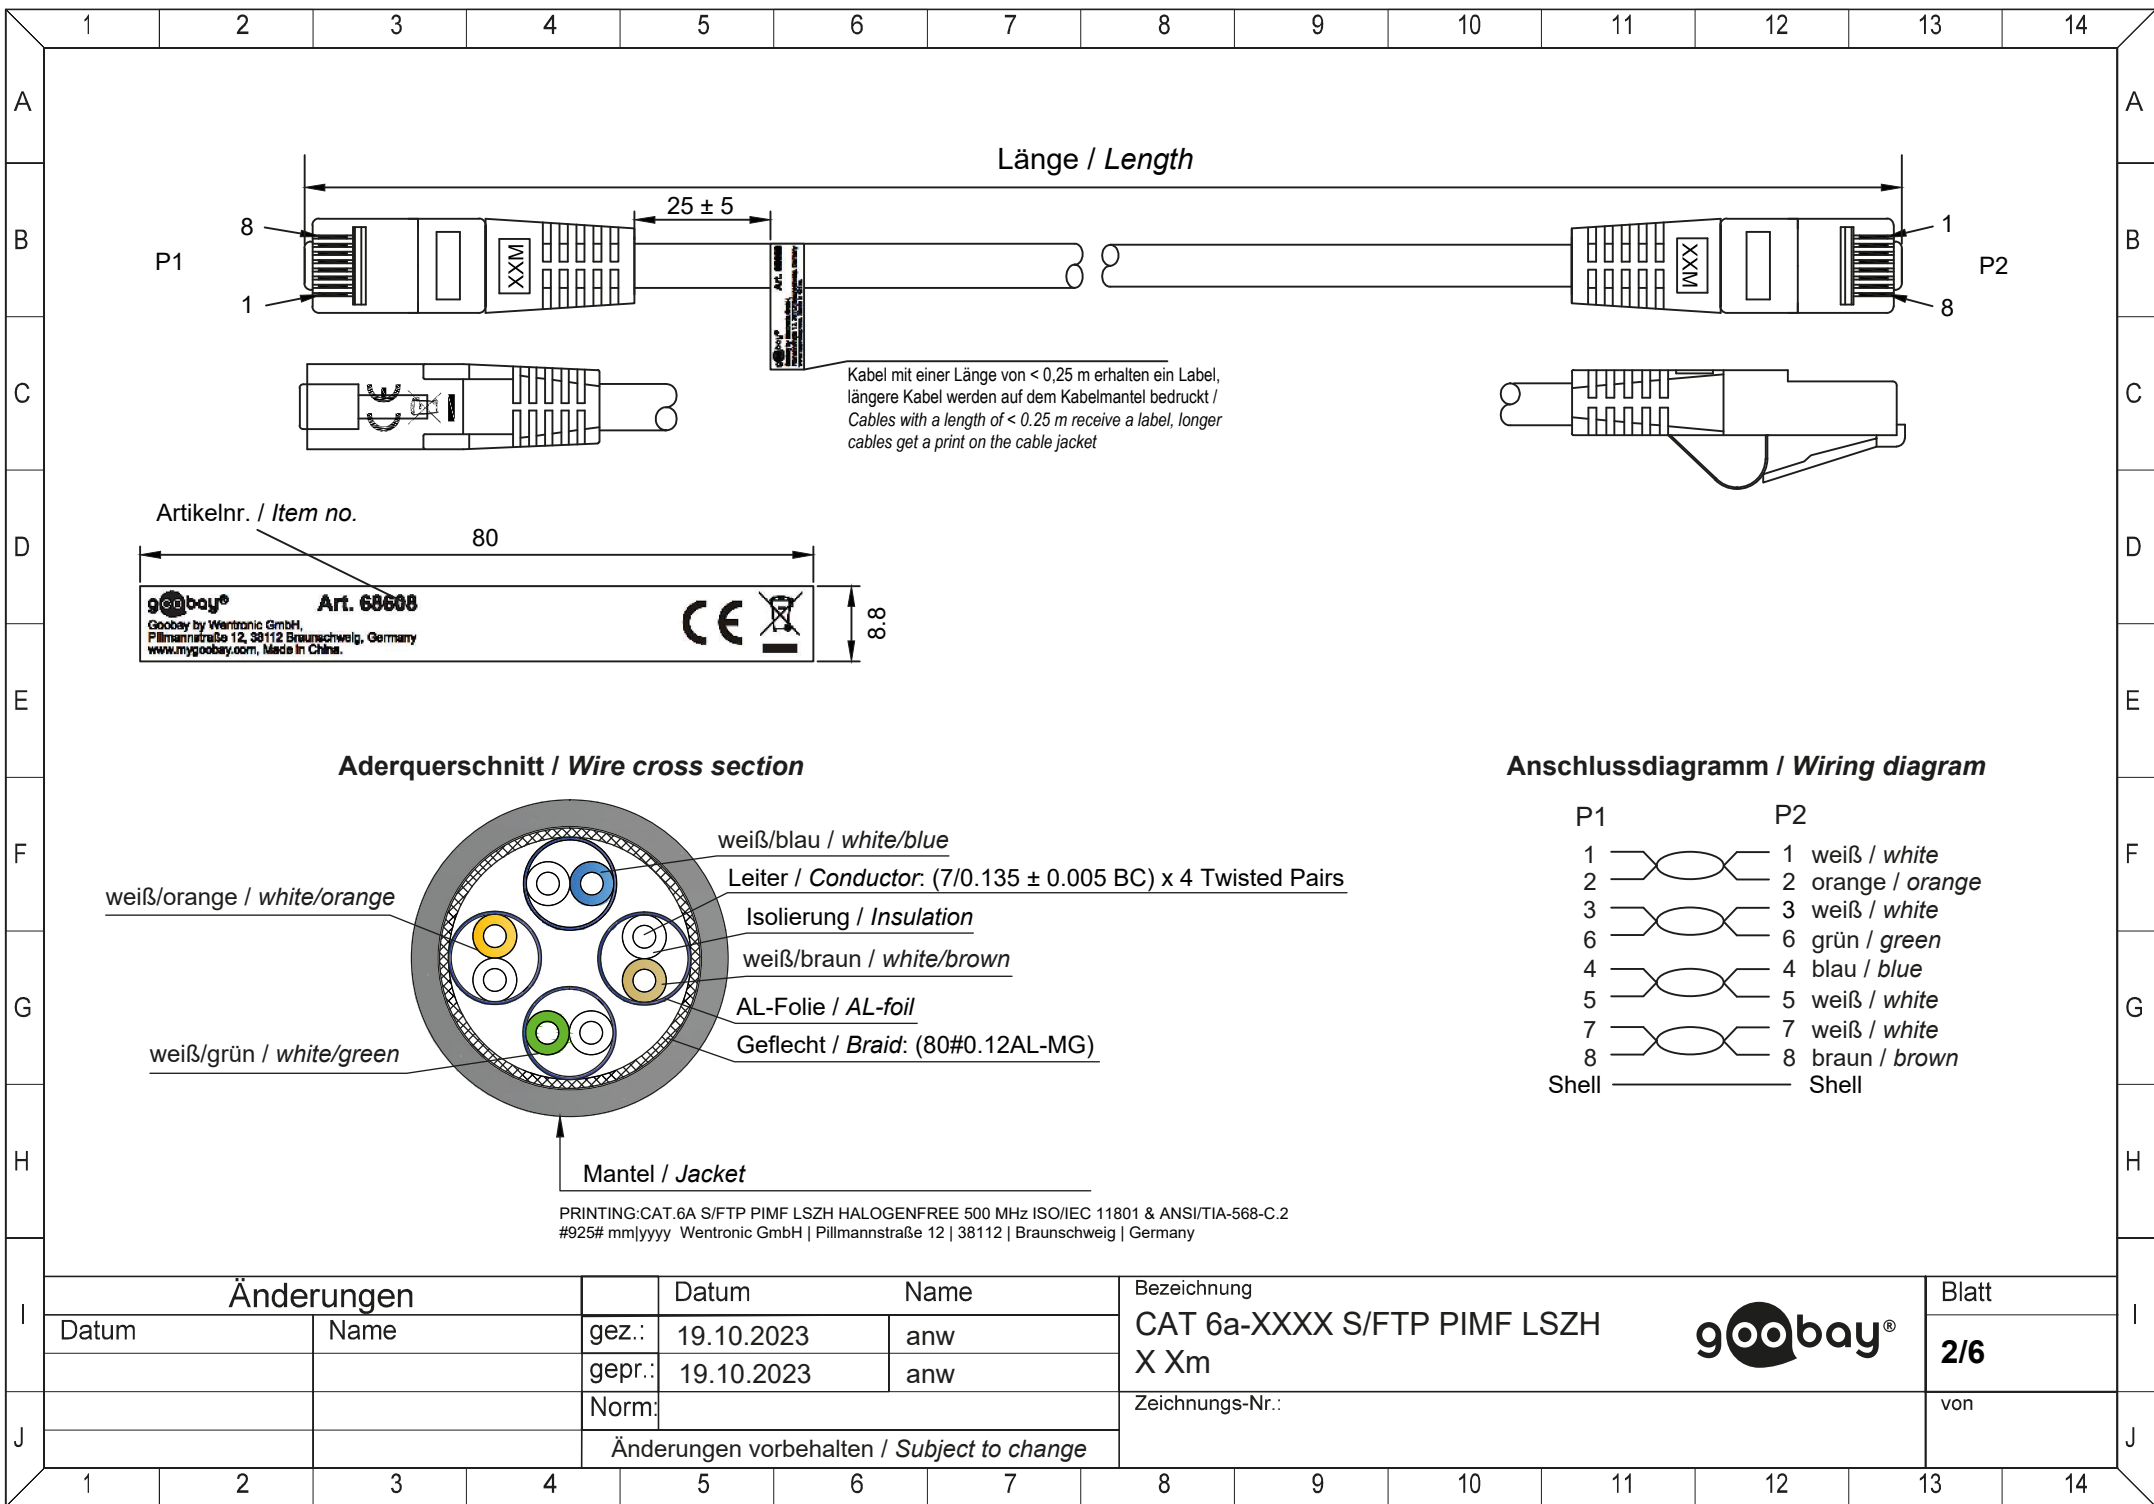
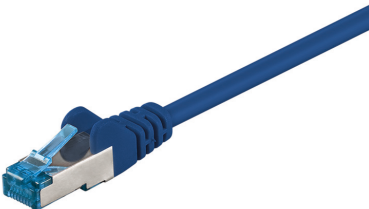
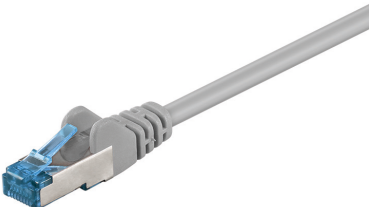
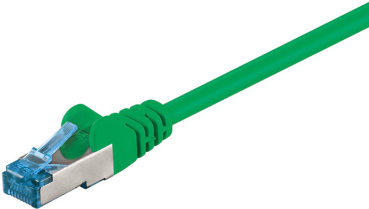
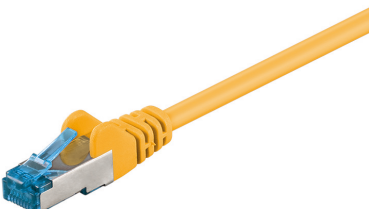





	1	2	3	4	5	6	7	8	9	10	11	12	13	14																																																																																					
A					CAT 6A Patchkabel, S/FTP (PiMF) - doppelt-geschirmtes LAN-Kabel mit 2x RJ45-Anschlüssen zur Verbindung von Netzwerk-Komponenten - geeignet für 10-Gigabit-Ethernet 10BASE-T, 100BASE-TX, 1000BASE-T, 10/100/1000/10000 Mbit/s - S/FTP-Gesamtschirmung: Aluminium-Folienschirmung für einzelne Adernpaare (PiMF) und Aluminium-Geflechschirmung für den Kabelmantel - hochwertiger Kupferleiter (CU) und mit 3µ vergoldete Kontaktflächen - mit Knickschutztülle und stabiler Ummantelung - Rastnasenschutz am RJ45-Stecker - CAT-6A-getestet (inkl. Messprotokoll) - für Power over Ethernet (PoE, PoE+) geeignet - Längenangabe auf Stecker - Prüfnorm nach ISO/IEC 11801 CAT 6A Class Ea Channel Link <table><tr><td>Spezifikation:</td><td>CAT 6A</td></tr><tr><td>Max. Bandbreite:</td><td>500 MHz</td></tr><tr><td>Kabeltyp:</td><td>Rundkabel</td></tr><tr><td>Material Innenleiter:</td><td>CU (Kupfer)</td></tr><tr><td>AWG:</td><td>27/7 (stranded)</td></tr><tr><td>Schirmungsklasse:</td><td>S/FTP (PiMF)</td></tr><tr><td>Anzahl Schirmungen:</td><td>2x</td></tr><tr><td>Schirmung Typ 1:</td><td>Folie (Aluminium) PiMF</td></tr><tr><td>Schirmung Typ 2:</td><td>Geflecht (Aluminium) Gesamtschirm</td></tr><tr><td>Material Kabelmantel:</td><td>LSZH</td></tr><tr><td>Durchmesser Kabelmantel:</td><td>5,9 ± 0.2 mm</td></tr><tr><td>LSZH-konform:</td><td>ja</td></tr><tr><td>Knickschutz:</td><td>beidseitig</td></tr><tr><td>Anschlüsse:</td><td>2x RJ45-Stecker (8P8C)</td></tr><tr><td>Anschluss Schirmung:</td><td>ja</td></tr><tr><td>Kontakte:</td><td>vergoldet (3 µm)</td></tr><tr><td>Gehäusematerial:</td><td>PVC</td></tr><tr><td>Rastnasenschutz:</td><td>beidseitig</td></tr><tr><td>Kontaktierung:</td><td>EIA/TIA-568B</td></tr><tr><td>Biegeradius >:</td><td>59 mm</td></tr><tr><td>Betriebstemperatur :</td><td>-20 °C ~ +65 °C</td></tr></table>					Spezifikation:	CAT 6A	Max. Bandbreite:	500 MHz	Kabeltyp:	Rundkabel	Material Innenleiter:	CU (Kupfer)	AWG:	27/7 (stranded)	Schirmungsklasse:	S/FTP (PiMF)	Anzahl Schirmungen:	2x	Schirmung Typ 1:	Folie (Aluminium) PiMF	Schirmung Typ 2:	Geflecht (Aluminium) Gesamtschirm	Material Kabelmantel:	LSZH	Durchmesser Kabelmantel:	5,9 ± 0.2 mm	LSZH-konform:	ja	Knickschutz:	beidseitig	Anschlüsse:	2x RJ45-Stecker (8P8C)	Anschluss Schirmung:	ja	Kontakte:	vergoldet (3 µm)	Gehäusematerial:	PVC	Rastnasenschutz:	beidseitig	Kontaktierung:	EIA/TIA-568B	Biegeradius >:	59 mm	Betriebstemperatur :	-20 °C ~ +65 °C	CAT 6A Patch Cable, S/FTP (PiMF) - double-shielded LAN cable with 2x RJ45 plugs for connecting network components - suitable for 10 Gigabit Ethernet 10BASE-T, 100BASE-TX, 1000BASE-T, 10/100/1000/10000 Mbit/s - S/FTP overall shield: aluminium foil shield for individual wire pairs (PiMF) and aluminium braid shield for the cable sheath - high-quality copper conductor (CU) and 3µ gold-plated contacts - with bend protection and a sturdy jacket - with latch protection on RJ45 plugs - CAT 6A tested (incl. test report) - suitable for Power over Ethernet (PoE,PoE+) - length indication on connector - Test standard according to ISO/IEC 11801 CAT 6A Class Ea Channel Link <table><tr><td>Specification:</td><td>CAT 8.1</td></tr><tr><td>Max. bandwidth:</td><td>500 MHz</td></tr><tr><td>Cable type:</td><td>round cable</td></tr><tr><td>Inner conductor material:</td><td>CU (copper)</td></tr><tr><td>AWG:</td><td>27/7 (stranded)</td></tr><tr><td>Shielding class:</td><td>S/FTP (PiMF)</td></tr><tr><td>Number of shieldings:</td><td>2x</td></tr><tr><td>Shielding type 1:</td><td>Foil (aluminium) PiMF</td></tr><tr><td>Shielding type 2:</td><td>Braid (aluminium) overall shield</td></tr><tr><td>Cable sheath material:</td><td>LSZH</td></tr><tr><td>Cable sheath diameter:</td><td>5.9 ± 0.2 mm</td></tr><tr><td>LSZH-compliant:</td><td>yes</td></tr><tr><td>Kink protection:</td><td>both sides</td></tr><tr><td>Connections:</td><td>2x RJ45 male (8P8C)</td></tr><tr><td>Connection shielding:</td><td>yes</td></tr><tr><td>Contacts:</td><td>gold-plated (50 µm)</td></tr><tr><td>Housing material:</td><td>PVC</td></tr><tr><td>Latch protection:</td><td>both sides</td></tr><tr><td>Contacting:</td><td>EIA/TIA-568B</td></tr><tr><td>Bending radius >:</td><td>59 mm</td></tr><tr><td>Operating temperature:</td><td>-20 °C ~ +65 °C</td></tr></table>					Specification:	CAT 8.1	Max. bandwidth:	500 MHz	Cable type:	round cable	Inner conductor material:	CU (copper)	AWG:	27/7 (stranded)	Shielding class:	S/FTP (PiMF)	Number of shieldings:	2x	Shielding type 1:	Foil (aluminium) PiMF	Shielding type 2:	Braid (aluminium) overall shield	Cable sheath material:	LSZH	Cable sheath diameter:	5.9 ± 0.2 mm	LSZH-compliant:	yes	Kink protection:	both sides	Connections:	2x RJ45 male (8P8C)	Connection shielding:	yes	Contacts:	gold-plated (50 µm)	Housing material:	PVC	Latch protection:	both sides	Contacting:	EIA/TIA-568B	Bending radius >:	59 mm	Operating temperature:	-20 °C ~ +65 °C	A
Spezifikation:					CAT 6A																																																																																														
Max. Bandbreite:					500 MHz																																																																																														
Kabeltyp:					Rundkabel																																																																																														
Material Innenleiter:					CU (Kupfer)																																																																																														
AWG:					27/7 (stranded)																																																																																														
Schirmungsklasse:					S/FTP (PiMF)																																																																																														
Anzahl Schirmungen:					2x																																																																																														
Schirmung Typ 1:					Folie (Aluminium) PiMF																																																																																														
Schirmung Typ 2:					Geflecht (Aluminium) Gesamtschirm																																																																																														
Material Kabelmantel:	LSZH																																																																																																		
Durchmesser Kabelmantel:	5,9 ± 0.2 mm																																																																																																		
LSZH-konform:	ja																																																																																																		
Knickschutz:	beidseitig																																																																																																		
Anschlüsse:	2x RJ45-Stecker (8P8C)																																																																																																		
Anschluss Schirmung:	ja																																																																																																		
Kontakte:	vergoldet (3 µm)																																																																																																		
Gehäusematerial:	PVC																																																																																																		
Rastnasenschutz:	beidseitig																																																																																																		
Kontaktierung:	EIA/TIA-568B																																																																																																		
Biegeradius >:	59 mm																																																																																																		
Betriebstemperatur :	-20 °C ~ +65 °C																																																																																																		
Specification:	CAT 8.1																																																																																																		
Max. bandwidth:	500 MHz																																																																																																		
Cable type:	round cable																																																																																																		
Inner conductor material:	CU (copper)																																																																																																		
AWG:	27/7 (stranded)																																																																																																		
Shielding class:	S/FTP (PiMF)																																																																																																		
Number of shieldings:	2x																																																																																																		
Shielding type 1:	Foil (aluminium) PiMF																																																																																																		
Shielding type 2:	Braid (aluminium) overall shield																																																																																																		
Cable sheath material:	LSZH																																																																																																		
Cable sheath diameter:	5.9 ± 0.2 mm																																																																																																		
LSZH-compliant:	yes																																																																																																		
Kink protection:	both sides																																																																																																		
Connections:	2x RJ45 male (8P8C)																																																																																																		
Connection shielding:	yes																																																																																																		
Contacts:	gold-plated (50 µm)																																																																																																		
Housing material:	PVC																																																																																																		
Latch protection:	both sides																																																																																																		
Contacting:	EIA/TIA-568B																																																																																																		
Bending radius >:	59 mm																																																																																																		
Operating temperature:	-20 °C ~ +65 °C																																																																																																		
B															B																																																																																				
C															C																																																																																				
D															D																																																																																				
E															E																																																																																				
F															F																																																																																				
G															G																																																																																				
H															H																																																																																				
I	Änderungen					Datum	Name		Bezeichnung				Blatt		I																																																																																				
	Datum		Name		gez.:	19.10.2023	anw		CAT 6a-XXXX S/FTP PIMF LSZH						1/6																																																																																				
					gepr.:	19.10.2023	anw		X Xm																																																																																										
					Norm:				Zeichnungs-Nr.:				von																																																																																						
J					Änderungen vorbehalten / Subject to change										J																																																																																				
	1	2	3	4	5	6	7	8	9	10	11	12	13	14																																																																																					

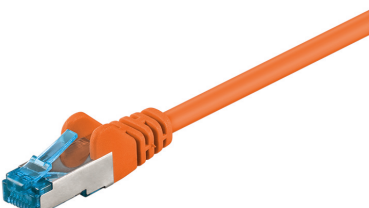

	1	2	3	4	5	6	7	8	9	10	11	12	13	14		
A				Art.-Nr. / Item No.	ERP Name / ERP Name			Länge / Length (L)		Performance / Performance					A	
B				94152	CAT 6a-0025 S/FTP PIMF LSZH SCHWARZ 0.25m			250 ± 10 mm		2 Cords + 50 m channel link Test accordance with ISO/IEC 11801 Class Ea POE					B	
				93664	CAT 6a-0050 S/FTP PIMF LSZH SCHWARZ 0.50m			500 ± 20 mm								
				93685	CAT 6a-0100 S/FTP PIMF LSZH SCHWARZ 1m			1000 ± 20 mm								
				95607	CAT 6a-0150 S/FTP PIMF LSZH SCHWARZ 1.5m			1500 ± 20 mm								
C				93746	CAT 6a-0200 S/FTP PIMF LSZH SCHWARZ 2m			2000 ± 30 mm		1 Cord + 50 m + 0.5 m channel link Test accordance with ISO/IEC 11801 Class Ea POE					C	
				93787	CAT 6a-0300 S/FTP PIMF LSZH SCHWARZ 3m			3000 ± 30 mm								
				93820	CAT 6a-0500 S/FTP PIMF LSZH SCHWARZ 5m			5000 ± 50 mm								
D				93853	CAT 6a-0750 S/FTP PIMF LSZH SCHWARZ 7.5m			7500 ± 75 mm		Channel test accordance with ISO/IEC 11801 Class Ea POE					D	
				93706	CAT 6a-1000 S/FTP PIMF LSZH SCHWARZ 10m			10000 ± 100 mm								
				94153	CAT 6a-1500 S/FTP PIMF LSZH SCHWARZ 15m			15000 ± 150 mm								
				94154	CAT 6a-2000 S/FTP PIMF LSZH SCHWARZ 20m			20000 ± 200 mm								
E				blau / blue	94905	CAT 6a-3000 S/FTP PIMF LSZH SCHWARZ 30m			30000 ± 300 mm		Channel test accordance with ISO/IEC 11801 Class Ea POE					E
					94906	CAT 6a-5000 S/FTP PIMF LSZH SCHWARZ 50m			50000 ± 500 mm							
	94130	CAT 6a-0025 S/FTP PIMF LSZH BLAU 0.25m			250 ± 10 mm											
	93656	CAT 6a-0050 S/FTP PIMF LSZH BLAU 0.50m			500 ± 20 mm											
F		93677	CAT 6a-0100 S/FTP PIMF LSZH BLAU 1m			1000 ± 20 mm		2 Cords + 50 m channel link Test accordance with ISO/IEC 11801 Class Ea POE					F			
		95599	CAT 6a-0150 S/FTP PIMF LSZH BLAU 1.5m			1500 ± 20 mm										
		93738	CAT 6a-0200 S/FTP PIMF LSZH BLAU 2m			2000 ± 30 mm										
		93779	CAT 6a-0300 S/FTP PIMF LSZH BLAU 3m			3000 ± 30 mm										
G		93812	CAT 6a-0500 S/FTP PIMF LSZH BLAU 5m			5000 ± 50 mm		1 Cord + 50 m + 0.5 m channel link Test accordance with ISO/IEC 11801 Class Ea POE					G			
		93845	CAT 6a-0750 S/FTP PIMF LSZH BLAU 7.5m			7500 ± 75 mm										
		93698	CAT 6a-1000 S/FTP PIMF LSZH BLAU 10m			10000 ± 100 mm										
		94131	CAT 6a-1500 S/FTP PIMF LSZH BLAU 15m			15000 ± 150 mm										
H		94133	CAT 6a-2000 S/FTP PIMF LSZH BLAU 20m			20000 ± 200 mm		Channel test accordance with ISO/IEC 11801 Class Ea POE					H			
		94911	CAT 6a-3000 S/FTP PIMF LSZH BLAU 30m			30000 ± 300 mm										
I								CAT 6a-XXXX S/FTP PIMF LSZH X Xm					Blatt 3/6	I		
J								Zeichnungs-Nr.: von					J			
Änderungen					Datum		Name		goobay®							
Datum		Name		gez.:	19.10.2023		anw									
				gepr.:	19.10.2023		anw									
				Norm:												
				Änderungen vorbehalten / Subject to change												

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	
A				Art.-Nr. / Item No.	ERP Name / ERP Name				Länge / Length (L)		Performance / Performance				A
B				94137	CAT 6a-0025 S/FTP PIMF LSZH GRAU 0.25m				250 ± 10 mm		2 Cords + 50 m channel link Test accordance with ISO/IEC 11801 Class Ea POE				B
				93659	CAT 6a-0050 S/FTP PIMF LSZH GRAU 0.50m				500 ± 20 mm						
				93680	CAT 6a-0100 S/FTP PIMF LSZH GRAU 1m				1000 ± 20 mm						
				95602	CAT 6a-0150 S/FTP PIMF LSZH GRAU 1.5m				1500 ± 20 mm						
C				93741	CAT 6a-0200 S/FTP PIMF LSZH GRAU 2m				2000 ± 30 mm		1 Cord + 50 m + 0.5 m channel link Test accordance with ISO/IEC 11801 Class Ea POE				C
				93782	CAT 6a-0300 S/FTP PIMF LSZH GRAU 3m				3000 ± 30 mm						
				93815	CAT 6a-0500 S/FTP PIMF LSZH GRAU 5m				5000 ± 50 mm						
				93848	CAT 6a-0750 S/FTP PIMF LSZH GRAU 7.5m				7500 ± 75 mm						
D				93701	CAT 6a-1000 S/FTP PIMF LSZH GRAU 10m				10000 ± 100 mm		Channel test accordance with ISO/IEC 11801 Class Ea POE				D
				94138	CAT 6a-1500 S/FTP PIMF LSZH GRAU 15m				15000 ± 150 mm						
				94139	CAT 6a-2000 S/FTP PIMF LSZH GRAU 20m				20000 ± 200 mm						
				94907	CAT 6a-3000 S/FTP PIMF LSZH GRAU 30m				30000 ± 300 mm						
E				94908	CAT 6a-5000 S/FTP PIMF LSZH GRAU 50m				50000 ± 500 mm		2 Cords + 50 m channel link Test accordance with ISO/IEC 11801 Class Ea POE				E
				94158	CAT 6a-0025 S/FTP PIMF LSZH WEISS 0.25m				250 ± 10 mm						
				93667	CAT 6a-0050 S/FTP PIMF LSZH WEISS 0.50m				500 ± 20 mm						
	93688	CAT 6a-0100 S/FTP PIMF LSZH WEISS 1m				1000 ± 20 mm									
F	95609	CAT 6a-0150 S/FTP PIMF LSZH WEISS 1.5m				1500 ± 20 mm		2 Cords + 50 m channel link Test accordance with ISO/IEC 11801 Class Ea POE				F			
	93749	CAT 6a-0200 S/FTP PIMF LSZH WEISS 2m				2000 ± 30 mm									
	93790	CAT 6a-0300 S/FTP PIMF LSZH WEISS 3m				3000 ± 30 mm									
	93823	CAT 6a-0500 S/FTP PIMF LSZH WEISS 5m				5000 ± 50 mm									
G	93856	CAT 6a-0750 S/FTP PIMF LSZH WEISS 7.5m				7500 ± 75 mm		1 Cord + 50 m + 0.5 m channel link Test accordance with ISO/IEC 11801 Class Ea POE				G			
	93709	CAT 6a-1000 S/FTP PIMF LSZH WEISS 10m				10000 ± 100 mm									
	94159	CAT 6a-1500 S/FTP PIMF LSZH WEISS 15m				15000 ± 150 mm									
	94160	CAT 6a-2000 S/FTP PIMF LSZH WEISS 20m				20000 ± 200 mm									
H	94909	CAT 6a-3000 S/FTP PIMF LSZH WEISS 30m				30000 ± 300 mm		Channel test accordance with ISO/IEC 11801 Class Ea POE				H			
	94910	CAT 6a-5000 S/FTP PIMF LSZH WEISS 50m				50000 ± 500 mm									
I	Änderungen Datum Name gez.: 19.10.2023 anw gepr.: 19.10.2023 anw Norm: Änderungen vorbehalten / Subject to change			Datum		Name		Bezeichnung				Blatt		I	
								CAT 6a-XXXX S/FTP PIMF LSZH X Xm				4/6			
								Zeichnungs-Nr.:				von			
J														J	

	1	2	3	4	5	6	7	8	9	10	11	12	13	14				
A				Art.-Nr. / Item No.	ERP Name / ERP Name			Länge / Length (L)		Performance / Performance					A			
B				94140	CAT 6a-0025 S/FTP PIMF LSZH GRÜN 0.25m			250 ± 10 mm		2 Cords + 50 m channel link Test accordance with ISO/IEC 11801 Class Ea POE					B			
				93660	CAT 6a-0050 S/FTP PIMF LSZH GRÜN 0.50m			500 ± 20 mm										
				93681	CAT 6a-0100 S/FTP PIMF LSZH GRÜN 1m			1000 ± 20 mm										
C				95603	CAT 6a-0150 S/FTP PIMF LSZH GRÜN 1.5m			1500 ± 20 mm		1 Cord + 50 m + 0.5 m channel link Test accordance with ISO/IEC 11801 Class Ea POE					C			
				93742	CAT 6a-0200 S/FTP PIMF LSZH GRÜN 2m			2000 ± 30 mm										
				93783	CAT 6a-0300 S/FTP PIMF LSZH GRÜN 3m			3000 ± 30 mm										
D				93816	CAT 6a-0500 S/FTP PIMF LSZH GRÜN 5m			5000 ± 50 mm		Channel test accordance with ISO/IEC 11801 Class Ea POE					D			
				93849	CAT 6a-0750 S/FTP PIMF LSZH GRÜN 7.5m			7500 ± 75 mm										
				93702	CAT 6a-1000 S/FTP PIMF LSZH GRÜN 10m			10000 ± 100 mm										
E				94141	CAT 6a-1500 S/FTP PIMF LSZH GRÜN 15m			15000 ± 150 mm		Channel test accordance with ISO/IEC 11801 Class Ea POE					E			
				94142	CAT 6a-2000 S/FTP PIMF LSZH GRÜN 20m			20000 ± 200 mm										
				65557	CAT 6a-5000 S/FTP PIMF LSZH GRÜN 50m			50000 ± 500 mm										
F				94134	CAT 6a-0025 S/FTP PIMF LSZH GELB 0.25m			250 ± 10 mm		2 Cords + 50 m channel link Test accordance with ISO/IEC 11801 Class Ea POE					F			
				93658	CAT 6a-0050 S/FTP PIMF LSZH GELB 0.50m			500 ± 20 mm										
				93679	CAT 6a-0100 S/FTP PIMF LSZH GELB 1m			1000 ± 20 mm										
G				95601	CAT 6a-0150 S/FTP PIMF LSZH GELB 1.5m			1500 ± 20 mm		1 Cord + 50 m + 0.5 m channel link Test accordance with ISO/IEC 11801 Class Ea POE					G			
				93740	CAT 6a-0200 S/FTP PIMF LSZH GELB 2m			2000 ± 30 mm										
				93781	CAT 6a-0300 S/FTP PIMF LSZH GELB 3m			3000 ± 30 mm										
H				93814	CAT 6a-0500 S/FTP PIMF LSZH GELB 5m			5000 ± 50 mm		Channel test accordance with ISO/IEC 11801 Class Ea POE					H			
				93847	CAT 6a-0750 S/FTP PIMF LSZH GELB 7.5m			7500 ± 75 mm										
				93700	CAT 6a-1000 S/FTP PIMF LSZH GELB 10m			10000 ± 100 mm										
I							94135	CAT 6a-1500 S/FTP PIMF LSZH GELB 15m			15000 ± 150 mm		2 Cords + 50 m channel link Test accordance with ISO/IEC 11801 Class Ea POE					I
							94146	CAT 6a-0025 S/FTP PIMF LSZH ORANGE 0.25m			250 ± 10 mm							
							93662	CAT 6a-0050 S/FTP PIMF LSZH ORANGE 0.50m			500 ± 20 mm							
J							93683	CAT 6a-0100 S/FTP PIMF LSZH ORANGE 1m			1000 ± 20 mm		1 Cord + 50 m + 0.5 m channel link Test accordance with ISO/IEC 11801 Class Ea POE					J
	95605	CAT 6a-0150 S/FTP PIMF LSZH ORANGE 1.5m					1500 ± 20 mm											
	93744	CAT 6a-0200 S/FTP PIMF LSZH ORANGE 2m					2000 ± 30 mm											
K	93785	CAT 6a-0300 S/FTP PIMF LSZH ORANGE 3m					3000 ± 30 mm		Channel test accordance with ISO/IEC 11801 Class Ea POE					K				
	93818	CAT 6a-0500 S/FTP PIMF LSZH ORANGE 5m					5000 ± 50 mm											
	93851	CAT 6a-0750 S/FTP PIMF LSZH ORANGE 7.5m					7500 ± 75 mm											
L	93704	CAT 6a-1000 S/FTP PIMF LSZH ORANGE 10m					10000 ± 100 mm		Channel test accordance with ISO/IEC 11801 Class Ea POE					L				
M	Änderungen						Datum		Name		Bezeichnung				Blatt			M
				Datum	Name	gez.:	19.10.2023	anw		CAT 6a-XXXX S/FTP PIMF LSZH				5/6				
						gepr.:	19.10.2023	anw		X Xm								
N				Norm:				Zeichnungs-Nr.:				von			N			
O				Änderungen vorbehalten / Subject to change											O			
1	2	3	4	5	6	7	8	9	10	11	12	13	14					

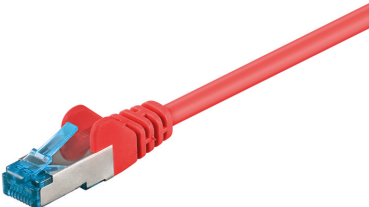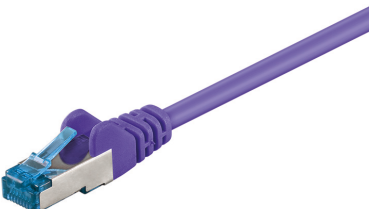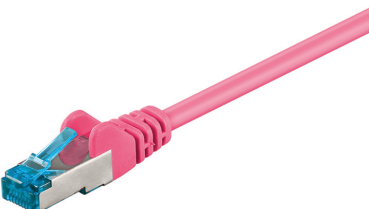	1	2	3	4	5	6	7	8	9	10	11	12	13	14		
A				Art.-Nr. / Item No.	ERP Name / ERP Name			Länge / Length (L)		Performance / Performance					A	
B				94149	CAT 6a-0025 S/FTP PIMF LSZH ROT 0.25m			250 ± 10 mm		2 Cords + 50 m channel link Test accordance with ISO/IEC 11801 Class Ea POE					B	
93663				CAT 6a-0050 S/FTP PIMF LSZH ROT 0.50m			500 ± 20 mm									
93684				CAT 6a-0100 S/FTP PIMF LSZH ROT 1m			1000 ± 20 mm									
95606				CAT 6a-0150 S/FTP PIMF LSZH ROT 1.5m			1500 ± 20 mm									
93745				CAT 6a-0200 S/FTP PIMF LSZH ROT 2m			2000 ± 30 mm									
C				93786	CAT 6a-0300 S/FTP PIMF LSZH ROT 3m			3000 ± 30 mm		1 Cord + 50 m + 0.5 m channel link Test accordance with ISO/IEC 11801 Class Ea POE Channel test accordance with ISO/IEC 11801 Class Ea POE					C	
93819				CAT 6a-0500 S/FTP PIMF LSZH ROT 5m			5000 ± 50 mm									
93852				CAT 6a-0750 S/FTP PIMF LSZH ROT 7.5m			7500 ± 75 mm									
93705				CAT 6a-1000 S/FTP PIMF LSZH ROT 10m			10000 ± 100 mm									
94150	CAT 6a-1500 S/FTP PIMF LSZH ROT 15m			15000 ± 150 mm												
D	94151	CAT 6a-2000 S/FTP PIMF LSZH ROT 20m			20000 ± 200 mm							D				
E				94155	CAT 6a-0025 S/FTP PIMF LSZH VIOLETT 0.25m			250 ± 10 mm		2 Cords + 50 m channel link Test accordance with ISO/IEC 11801 Class Ea POE					E	
F				93666	CAT 6a-0050 S/FTP PIMF LSZH VIOLETT 0.50m			500 ± 20 mm								
93687				CAT 6a-0100 S/FTP PIMF LSZH VIOLETT 1m			1000 ± 20 mm									
95608				CAT 6a-0150 S/FTP PIMF LSZH VIOLETT 1.5m			1500 ± 20 mm									
93748				CAT 6a-0200 S/FTP PIMF LSZH VIOLETT 2m			2000 ± 30 mm									
				93789	CAT 6a-0300 S/FTP PIMF LSZH VIOLETT 3m			3000 ± 30 mm		1 Cord + 50 m + 0.5 m channel link Test accordance with ISO/IEC 11801 Class Ea POE Channel test accordance with ISO/IEC 11801 Class Ea POE					F	
93822				CAT 6a-0500 S/FTP PIMF LSZH VIOLETT 5m			5000 ± 50 mm									
93855				CAT 6a-0750 S/FTP PIMF LSZH VIOLETT 7.5m			7500 ± 75 mm									
93708				CAT 6a-1000 S/FTP PIMF LSZH VIOLETT 10m			10000 ± 100 mm									
94156				CAT 6a-1500 S/FTP PIMF LSZH VIOLETT 15m			15000 ± 150 mm									
G				94143	CAT 6a-0025 S/FTP PIMF LSZH MAGENTA 0.25m			250 ± 10 mm		2 Cords + 50 m channel link Test accordance with ISO/IEC 11801 Class Ea POE					G	
H				93661	CAT 6a-0050 S/FTP PIMF LSZH MAGENTA 0.50m			500 ± 20 mm								
93682				CAT 6a-0100 S/FTP PIMF LSZH MAGENTA 1m			1000 ± 20 mm									
95604				CAT 6a-0150 S/FTP PIMF LSZH MAGENTA 1.5m			1500 ± 20 mm									
93743				CAT 6a-0200 S/FTP PIMF LSZH MAGENTA 2m			2000 ± 30 mm									
				93784	CAT 6a-0300 S/FTP PIMF LSZH MAGENTA 3m			3000 ± 30 mm		1 Cord + 50 m + 0.5 m channel link Test accordance with ISO/IEC 11801 Class Ea POE Channel test accordance with ISO/IEC 11801 Class Ea POE					H	
93817				CAT 6a-0500 S/FTP PIMF LSZH MAGENTA 5m			5000 ± 50 mm									
93850				CAT 6a-0750 S/FTP PIMF LSZH MAGENTA 7.5m			7500 ± 75 mm									
93703				CAT 6a-1000 S/FTP PIMF LSZH MAGENTA 10m			10000 ± 100 mm									
94144				CAT 6a-1500 S/FTP PIMF LSZH MAGENTA 15m			15000 ± 150 mm									
I	Änderungen			Datum		Name		Bezeichnung					Blatt		I	
	Datum		Name		gez.:	19.10.2023	anw	CAT 6a-XXXX S/FTP PIMF LSZH							6/6	
					gepr.:	19.10.2023	anw	X Xm								
					Norm:				Zeichnungs-Nr.:					von		J
J				Änderungen vorbehalten / Subject to change												J
	1	2	3	4	5	6	7	8	9	10	11	12	13	14		