




Connectors > Automotive Connectors > Automotive Housings > AMPSEAL Receptacle Housings

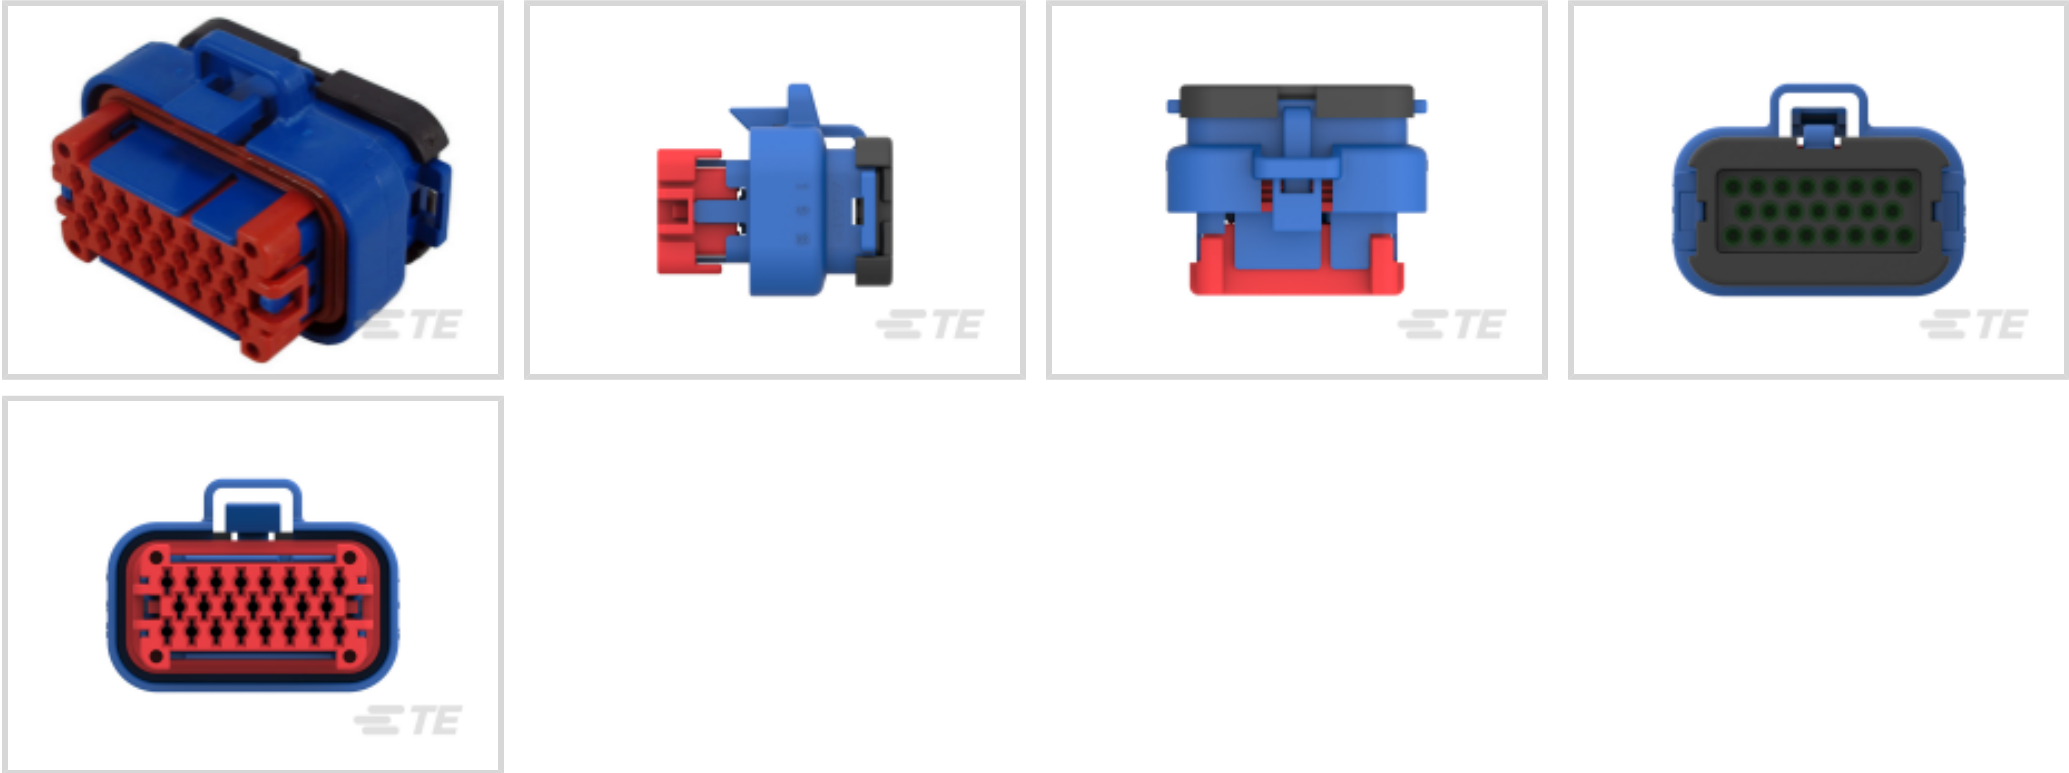

Connector System: **Wire-to-Board**
Number of Positions: **23**
Connector & Housing Type: **Housing for Female Terminals**
Centerline (Pitch): **4 mm [.157 in]**
Sealable: **Yes**

[All AMPSEAL Receptacle Housings \(31\)](#)

Features

Product Type Features

Mixed & Hybrid Connector	No
Connector Shape	Rectangular
Connector System	Wire-to-Board
Connector & Housing Type	Housing for Female Terminals
Sealable	Yes
Primary Locking Feature	Integrated in Housing

Configuration Features

Number of Positions	23
Number of Rows	3

Electrical Characteristics

Operating Voltage	250 VAC
Nominal Voltage Architecture	250 V

Body Features



Cable Exit Angle	180°
Primary Product Color	Blue
Connector & Keying Code	5

Contact Features

Contact Size	1.3mm
Contact Type	Socket
Mating Pin Diameter	1.3 mm[.051 in]
Contact Current Rating (Max)	17 A

Mechanical Attachment

Terminal Position Assurance	Yes
Strain Relief	Add By Accessory
Mating Alignment Type	Keyed
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)

Housing Features

Housing Material	PBT GF
Centerline (Pitch)	4 mm[.157 in]

Dimensions

Connector Height	34.6 mm[1.362 in]
Product Width	33.6 mm[1.323 in]
Product Length	47.4 mm[1.866 in]
Row-to-Row Spacing	4 mm[.157 in]

Usage Conditions

Operating Temperature (Max)	125 °C[257 °F]
Operating Temperature Range	-40 – 125 °C[-40 – 257 °F]

Operation/Application

Circuit Application	Power & Signal
---------------------	----------------

Industry Standards

Degree of Protection	IP67, IP69K
UL Flammability Rating	UL 94V-0

Packaging Features

Packaging Quantity	140
--------------------	-----



Packaging Method	Package
Other	
Serviceable	Yes
Connector Position Assurance Capable	Yes

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) SVHC > Threshold: Octamethylcyclotetrasiloxane (D4) (.5% in Component Part) Dodecamethylcyclohexasiloxane (D6) (.5% in Component Part) Decamethylcyclopentasiloxane (D5) (.5% in Component Part) Article Safe Usage Statements: Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # CAT-AM78-H342
AMPSEAL PCB Headers



TE Part # CAT-AM78-T273
AMPSEAL Crimp Contacts: 1.3 mm



TE Part # CAT-J04-APHH
AMPSEAL PCB Horizontal Headers



TE Part # 2389806-1
STRAIN RELIEF, 23 POSITION
AMPSEAL



TE Part # 770678-1
SEAL PLUG, AMPSEAL



TE Part # 2373965-1
CPA, AMPSEAL


Also in the Series | AMPSEAL



Automotive Connector Locks & Position Assurance(1)



Automotive Housings(31)

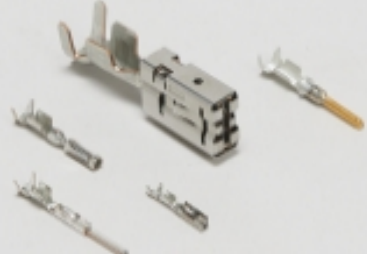


Automotive Terminals(8)



Connector Backshells(4)



Connector Seals & Cavity Plugs(2)

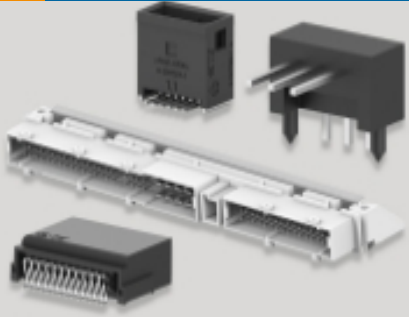


PCB Headers & Receptacles(115)

Customers Also Bought



TE Part #776164-1
AMPSEAL Receptacle Housings

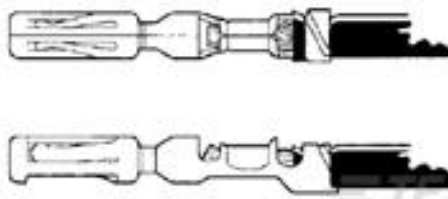

TE Part #770854-1
CONTACT, AMPSEAL SN/LP



TE Part #776228-5
AMPSEAL PCB Headers



TE Part #1-2176510-5
CJP 500W 22R 5% Lead






TE Part #DT04-12PA-E008
REC, 12P, GRY, N, XCAP, A



TE Part #1-1879448-1
TE 300W 6R8 5% Bracket

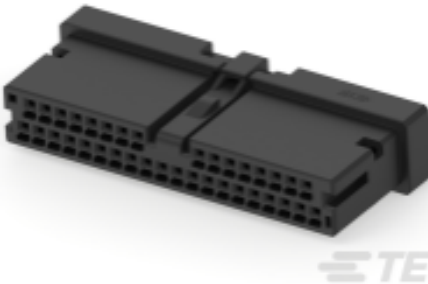

TE Part #3-2834461-6
MINI DYNAMIC REC HSG ASSY 36P X-KEY BLK



TE Part #2151346-1
OCEAN_2.0_APPLICATOR-S-100F165O

Documents

Product Drawings

23POS,AMPSEAL,SOC HSG ASSY,SLD,COD 5

English

CAD Files

Customer View Model

ENG_CVM_CVM_770680-5_L.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_770680-5_L.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_770680-5_L.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

AMPSEAL Connector Catalog

English

ICT Terminals and Connectors Catalogue

English

CONNECTOR SELECTOR

English

Product Specifications

Application Specification

English

Instruction Sheets

Instruction Sheet (U.S.)

English

Agency Approvals

UL Report

770680-5

Housing for Female Terminals, Wire-to-Board, 23 Position, .157 in [4 mm] Centerline,
Sealable, Blue, Power & Signal, AMPSEAL



English