
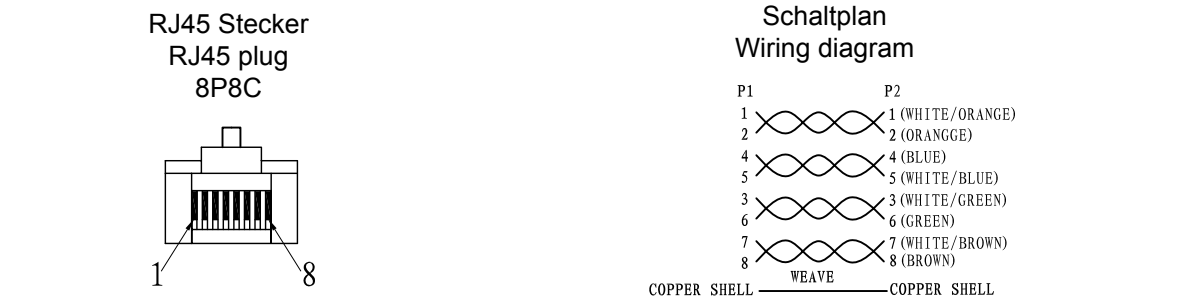


1	2	3	4	5	6	7	8	9	10	11	12	13	14
CAT 7 Network cable, LSZH; S/FTP													
MECHANICAL:													
- Connectors				2x RJ45-Stecker									
- Contacts				8P8C (50µ vergoldet)									
- Shielding				S/FTP (doppelt geschirmt)									
- Inner conductor				4 x 2 x AWG 26/7 BC									
- Insulation				LSZH									
- Outer diameter				6 mm									
ELECTRICAL:													
- Standard				CAT 7 (600 MHz)									
- Impedance				100 Ω									
- Withstanding voltage				300 V @ 10 ms									
- Insulation resistance				1 MΩ @ 1 min.									
ENVIRONMENTAL:													

CAT 7 Network cable, LSZH; S/FTP													
MECHANICAL:													
- Connectors				2x RJ45 plug									
- Contacts				8P8C (50µ gold-plated)									
- Shielding				S/FT P (double shielded)									
- Inner conductor				4 x 2 x AWG 26/7 BC									
- Insulation				LSZH									
- Outer diameter				6 mm									
ELECTRICAL:													
- Standard				CAT 7 (600 MHz)									
- Impedance				100 Ω									
- Withstanding voltage				300 V @ 10 ms									
- Insulation resistance				1 MΩ @ 1 min.									
ENVIRONMENTAL:													

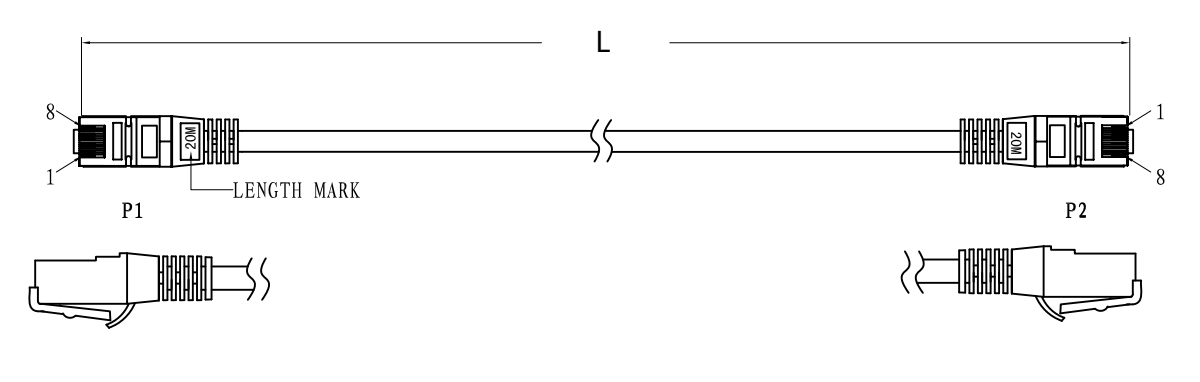

CAT 7 Netzwerkkabel; LSZH; S/FTP	CAT 7 Network cable, LSZH; S/FTP
MECHANIK:	MECHANICAL:
- Anschlüsse	- Connectors
- Kontakte	- Contacts
- Schirmung	- Shielding
- Innenleiter	- Inner conductor
- Isolierung	- Insulation
- Außendurchmesser	- Outer diameter
ELEKTRIK:	ELECTRICAL:
- Standard	- Standard
- Impedanz	- Impedance
- Spannungsfestigkeit	- Withstanding voltage
- Isolationswiderstand	- Insulation resistance
UMWELT:	ENVIRONMENTAL:
- RoHS-konform	- RoHS compliant

Änderungen	Datum	Name	Bezeichnung	Blatt
Datum	gez.: 18.11.2014	tf	CAT 7 S/FTP PIMF RJ45	
Name	gepr.: 18.11.2014	tf		
	Norm:		Zeichnungs-Nr.:	von
	Änderungen vorbehalten / Subject to change			

