


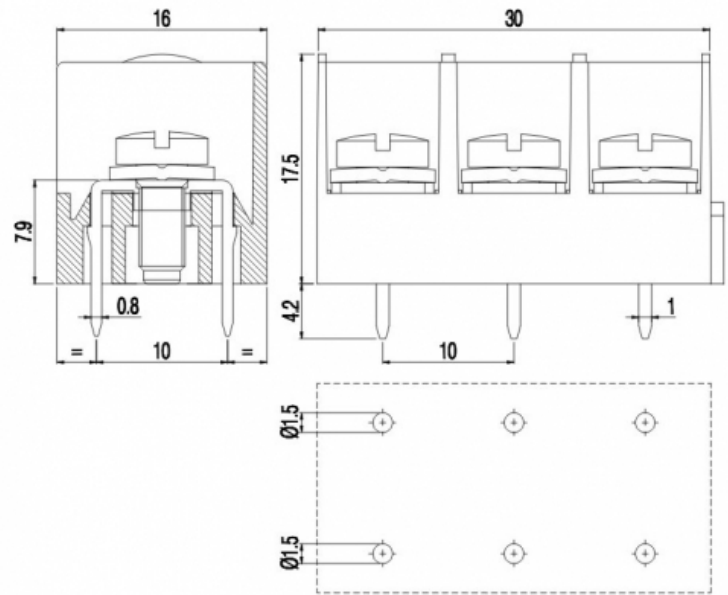

Barrier terminal block - Closed - Modular version - Pitch 10mm - 2÷3 poles

GENERAL INFORMATION

pitch:	10 mm
housing height:	17,50 mm
housing depth:	76 mm
dimensional class:	medium
wire section:	2x2.5 mm ² / 2x14 AWG
clamp opening size:	
wire stripping:	max 11 mm
operating temperature:	-40°C ÷ +130°C

ELECTRICAL CHARACTERISTICS

current:	25A
voltage:	750V
test voltage:	3 kVrms/60s

MECHANICAL CHARACTERISTICS

screw:	M3
recommended torque:	0.8÷0.88 Nm / 7.2÷7.9 in.lbs

APPROVALS DATA



EN 60998-1

current:	24A
voltage:	750V
wire section:	2x2.5mm ²
torque:	0.8Nm
FILE:	EQ203



EN 60998-1

current:	25A
voltage:	750V
wire section:	2x2.5mm ²
torque:	0.8Nm
FILE:	40019721



UL 1059

current:	25A factory / 20A field
voltage:	600V
wire section:	12÷26AWG
torque:	7.2Lb-in
FILE:	E178356

MATERIALS

housing: PA - UL 94 V0
screw: Galvanized steel
clamp/spring: Galvanized iron
terminal: Tin-plated copper alloy

AVAILABLE COLOURS



other colours: upon request

poles	P/N	pcs/pack	W [Kg]*	W [Kg]*
2	MT212-10-C	N/A	N/A	N/A
3	MT213-10-C	N/A	N/A	N/A
..	MT21..-10-C	N/A	N/A	N/A