


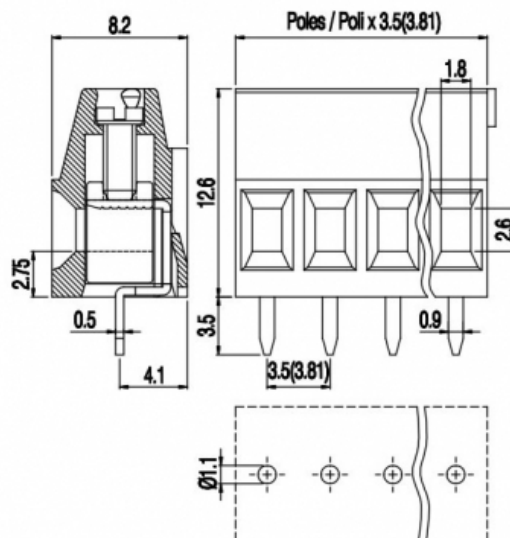

Version with antirotation pegs is available on 2 poles connections.
Disponibile per connessioni a 2 poli versioni con perni antitorsione.

Single-deck terminal block - Modular version - Pitch 3,5mm - 2÷12 poles

GENERAL INFORMATION

pitch:	3,5 mm
housing height:	12,60 mm
housing depth:	8.2 mm
dimensional class:	slow
wire section:	1.5 mm ² / 16 AWG
clamp opening size:	1.8 × 2.6 mm
wire stripping:	max 6 mm
operating temperature:	-40°C ÷ +130°C

ELECTRICAL CHARACTERISTICS

current:	13,5A
voltage:	130V
test voltage:	1.25 kVrms/60s

MECHANICAL CHARACTERISTICS

screw:	M2
recommended torque:	0.2÷0.22 Nm / 1.8÷2 in.lbs

APPROVALS DATA



EN 60998-1

current: 17.5A

voltage: 130V

wire section: 1.5mm²

torque: 0.2Nm

FILE: CA02.04718



-

-

-

-

-

-



UL 1059

12A factory / 10A field

150V

16÷30AWG

1.8Lb-in

E178356

ADDITIONAL INFORMATION

SCIP NUMBER:

44bdd228-db28-48a8-9c38-13f7c55006ec

MATERIALS

housing: PA - UL 94 V0
screw: Galvanized steel
clamp/spring: Tin-plated copper alloy
terminal: Tin-plated copper alloy

AVAILABLE COLOURS



other colours:

upon request

poles	P/N	pcs/pack	W [Kg]*	W [Kg]*
2	MVS132-3,5-V	N/A	N/A	N/A
3	MVS133-3,5-V	N/A	N/A	N/A
4	MVS134-3,5-V	N/A	N/A	N/A
5	MVS135-3,5-V	N/A	N/A	N/A
6	MVS136-3,5-V	N/A	N/A	N/A
7	MVS137-3,5-V	N/A	N/A	N/A
8	MVS138-3,5-V	N/A	N/A	N/A
9	MVS139-3,5-V	N/A	N/A	N/A
10	MVS1310-3,5-V	N/A	N/A	N/A
11	MVS1311-3,5-V	N/A	N/A	N/A
12	MVS1312-3,5-V	N/A	N/A	N/A
..	MVS13..-3,5-V	N/A	N/A	N/A