
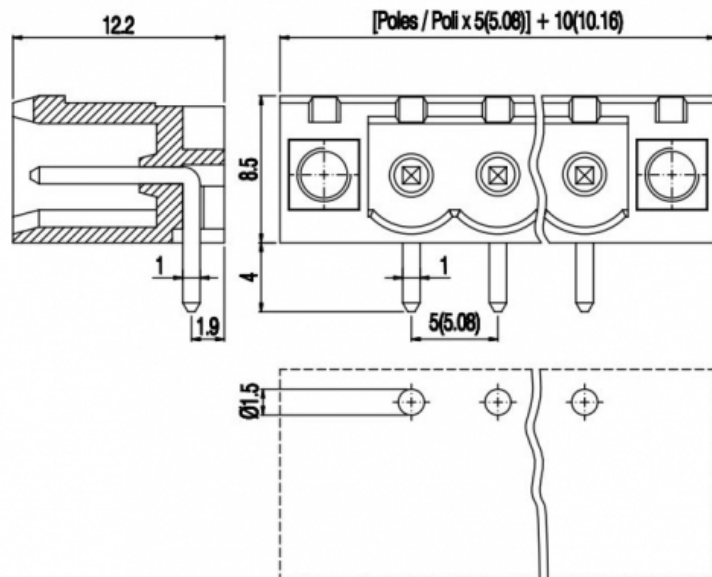


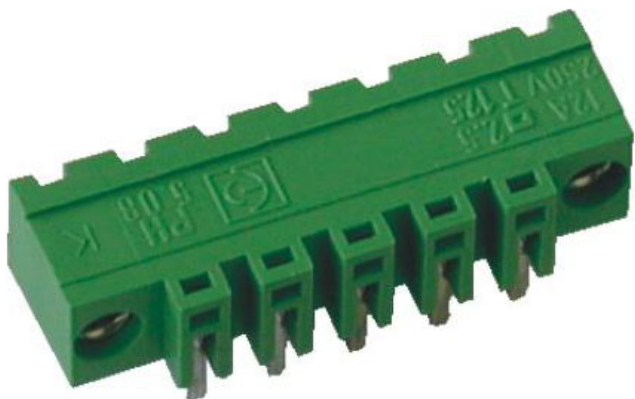

Male plug-in connector - with flange screw - Pitch 5,08mm - 02 ÷ 22 poles

GENERAL INFORMATION

pitch:	5,08 mm
housing height:	8,50 mm
housing depth:	12.2 mm
dimensional class:	medium
wire section:	-
clamp opening size:	-
wire stripping:	-
operating temperature:	-40°C ÷ +130°C

ELECTRICAL CHARACTERISTICS

current:	12A
voltage:	250V
impulse voltage:	4 kV

MECHANICAL CHARACTERISTICS

APPROVALS DATA



EN 61984

current:	16A
voltage:	250V
FILE:	CA02.04178



EN 61984

current:	12A
voltage:	250V
FILE:	40005779



UL 1059

current:	12A factory / 12A field
voltage:	300V
FILE:	E178356

ADDITIONAL INFORMATIONS

SCIP NUMBER:	892ed63d-670d-4367-9365-34dfcaff593c
--------------	--------------------------------------

MATERIALS

housing:	PA - UL 94 V0
screw:	n/a
clamp/spring:	n/a

AVAILABLE COLOURS



other colours: upon request

terminal:

Tin-plated copper alloy

poles	P/N	pcs/pack	W [Kg]*	W [Kg]*
02	PV02-5,08-H-K	N/A	N/A	N/A
03	PV03-5,08-H-K	N/A	N/A	N/A
04	PV04-5,08-H-K	N/A	N/A	N/A
05	PV05-5,08-H-K	N/A	N/A	N/A
06	PV06-5,08-H-K	N/A	N/A	N/A
07	PV07-5,08-H-K	N/A	N/A	N/A
08	PV08-5,08-H-K	N/A	N/A	N/A
09	PV09-5,08-H-K	N/A	N/A	N/A
10	PV10-5,08-H-K	N/A	N/A	N/A
11	PV11-5,08-H-K	N/A	N/A	N/A
12	PV12-5,08-H-K	N/A	N/A	N/A
13	PV13-5,08-H-K	N/A	N/A	N/A
14	PV14-5,08-H-K	N/A	N/A	N/A
15	PV15-5,08-H-K	N/A	N/A	N/A
16	PV16-5,08-H-K	N/A	N/A	N/A
17	PV17-5,08-H-K	N/A	N/A	N/A
18	PV18-5,08-H-K	N/A	N/A	N/A
19	PV19-5,08-H-K	N/A	N/A	N/A
20	PV20-5,08-H-K	N/A	N/A	N/A
21	PV21-5,08-H-K	N/A	N/A	N/A
22	PV22-5,08-H-K	N/A	N/A	N/A