
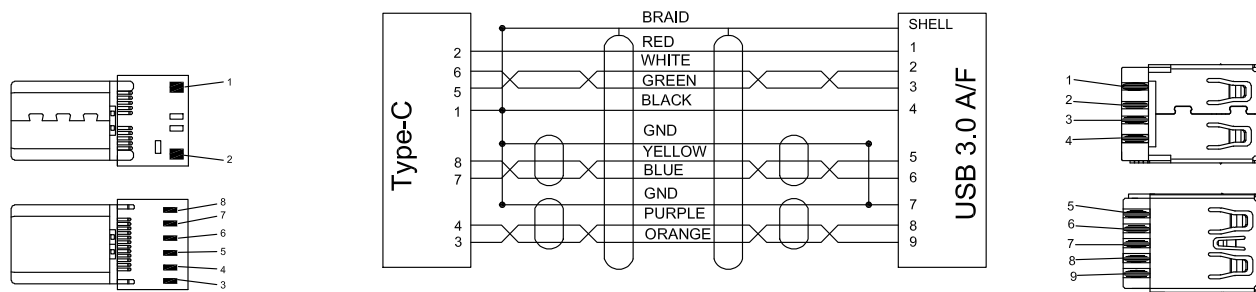


REV	DESCRIPTION	DATE
A0	INITIAL RELEASE	2015-08-10

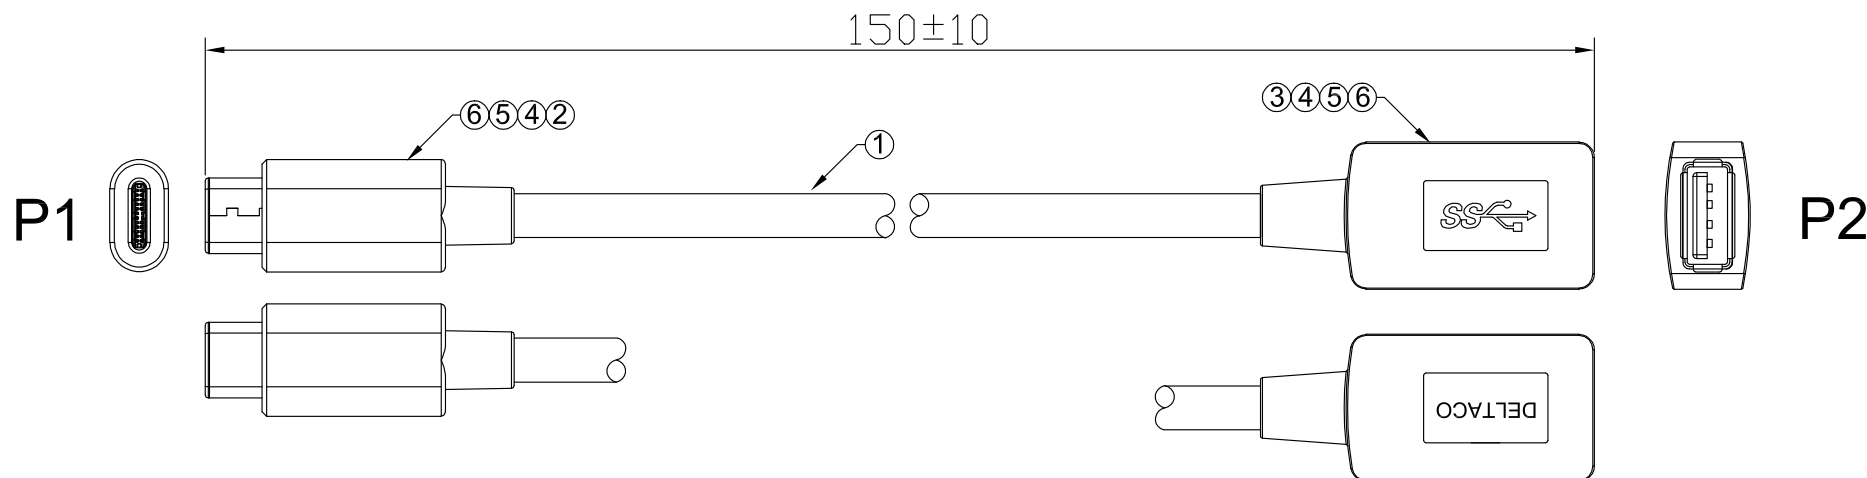

Testing requirements:
Conduction test OK
SSD data test OK

6	H. S. T	AM-TG0004	heat-shrinkable tube, Black, $\Phi 1.0 \times L=8\text{mm}$	3 Pcs
5	PVC	PVC-0002	60P PVC White	6.00g
4	PE	PE-0001	LDPE-PE101	2.50g
3	CONN	CN-N0203	USB 3.0 A/F, (Blue plastic), Shell nickel Plated	1 Pcs
2	CONN	CN-G0304	Type-C/M(Black plastic)+PCB, Gold Plated	1 Pcs
1	CABLE	CB080-38-32191	(32AWG*1P+D+AL+MY)*2P+32AWG*1P+32AWG*1C+26AWG*1C+F+AB(16/9/0.08T), JACKET PVC WHITE. OD=3.8 $\pm$ 0.20mm	140mm
NO.	Material	P/N	Specifications Description	Quantity

图号 (DWG NO)	XY-A2407	单位(UNIT) MM		
版次 (REV)	A0	比例(SCALE)free		
页次 (PAGE)	1/1			
设计 (DESIGN)	Sunny	未 注 公 差 TOLERANCE UNSPECIFIED	Description	Type-C/M to USB 3.0 A/F Cable
审核 (CHECKED)		X.X ± 0.25 X.XX ± 0.15 X.XXX ± 0.05 X' ± 5' X.X' ± 2'		
核准 (APPROVED)			PART NO	USBC-1205