

Q

USW-Lite-8-POE

Switching

WiFi

Camera Security

Door Access

CloudKeys & Gateways

Power Tech

New In

Utility

>


Lite 8 PoE

Datasheet

In The Box

Marketing Images

Installation Guide

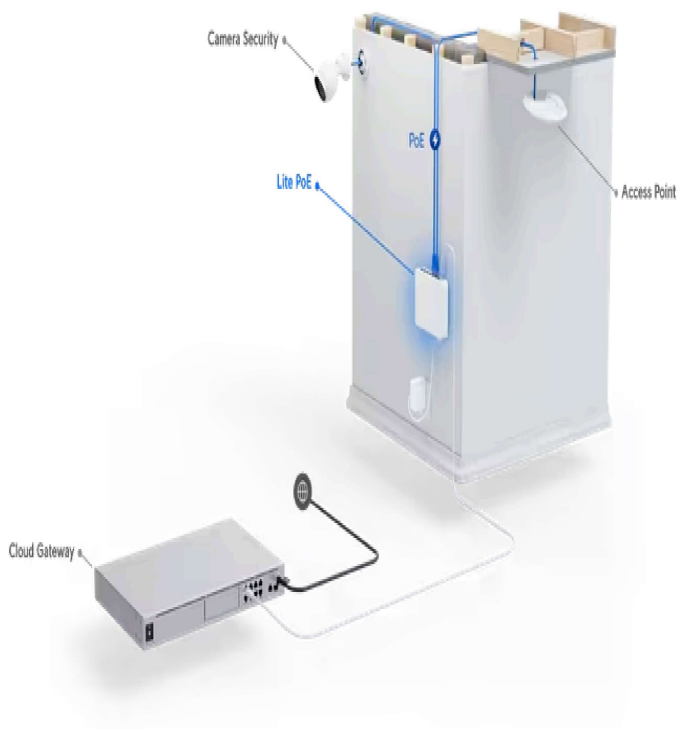

Mechanical

Dimensions	99.6 x 163.7 x 31.7 mm (4 x 6.4 x 1.3")
Weight	295 g (10.4 oz)
Enclosure material	Polycarbonate

Hardware

Management interface	Ethernet In-Band
----------------------	------------------

Networking interface	(8) GbE RJ45 ports
PoE interface	(4) PoE/PoE+ (Pins 1, 2+; 3, 6-)
Total non-blocking throughput	8 Gbps
Switching capacity	16 Gbps
Forwarding rate	11.904 Mpps
Power method	54V DC, 1.1A power adapter
Power supply	54V, external, 60W
Supported voltage range	50—57V DC
Max. power consumption	8W (Excluding PoE output)
Total available PoE	52W*
	*With an external 60W power adapter.
Max. PoE wattage per port by PSE	PoE+: 30W
Button	Factory reset
Ambient operating temperature	-15 to 40° C (5 to 104° F)
Ambient operating humidity	10 to 90% noncondensing
Certifications	CE, FCC, IC

Switching Features

Layer 2 features	IGMP snooping STP / RSTP with priorities and port-level disable Port isolation Storm control Voice VLAN Port mirroring LACP port aggregation Multicast / broadcast rate limiting MAC address blocking Flow control 802.1X control Jumbo frames Proprietary loop protection DHCP snooping / guarding Egress rate limit LLDP-MED Port restricted by MAC Device isolation with ACLs
-------------------------	---

Layer 3 features -

LEDs

System	Status
Ethernet	PoE Speed/link/activity
PoE	Link/activity

Application Requirements

UniFi Network	Version 7.2.94 and later
---------------	--------------------------

Stay in Touch

Email

Subscribe



[Terms of Service](#) | [Privacy Policy](#) | [Legal](#) | [Cookies Settings](#)