


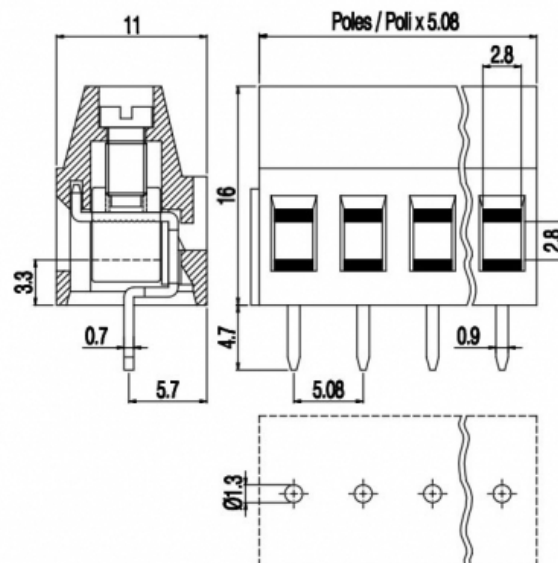

Version with antirotation pegs is available on 2 poles connections.
Disponibile per connessioni a 2 poli versioni con perni antitorsione.

Single-deck terminal block - Modular version - Pitch 5,08mm - 02÷12 poles

GENERAL INFORMATION

pitch:	5,08 mm
housing height:	16,00 mm
housing depth:	11 mm
dimensional class:	medium
wire section:	2.5 mm ² / 14 AWG
clamp opening size:	2.8 × 2.8 mm
wire stripping:	max 8 mm
operating temperature:	-40°C ÷ +130°C

ELECTRICAL CHARACTERISTICS

current:	16A
voltage:	450V
test voltage:	2.5 kVrms/60s

MECHANICAL CHARACTERISTICS

screw:	M3
recommended torque:	0.5÷0.55 Nm / 4.5÷4.9 in.lbs

APPROVALS DATA



EN 60998-1

current:	16A
voltage:	450V
wire section:	2.5mm ²
torque:	0.5Nm
FILE:	EP149



EN 60998-1

16A
450V
2.5mm ²
0.5Nm
40023956



UL 1059

16A factory / 15A field
300V
14÷30AWG
4.5Lb-in
E178356

ADDITIONAL INFORMATION

SCIP NUMBER:	0ab5c29e-2c2a-42d2-bc27-7c61f6570969
--------------	--------------------------------------

MATERIALS

housing: PA - UL 94 V0
screw: Galvanized steel
clamp/spring: Nickeled copper alloy
terminal: Tin-plated copper alloy

AVAILABLE COLOURS



other colours:

upon request

poles	P/N	pcs/pack	W [Kg]*	W [Kg]*
2	MV252-5,08-V	N/A	N/A	N/A
3	MV253-5,08-V	N/A	N/A	N/A
4	MV254-5,08-V	N/A	N/A	N/A
5	MV255-5,08-V	N/A	N/A	N/A
6	MV256-5,08-V	N/A	N/A	N/A
7	MV257-5,08-V	N/A	N/A	N/A
8	MV258-5,08-V	N/A	N/A	N/A
9	MV259-5,08-V	N/A	N/A	N/A
10	MV2510-5,08-V	N/A	N/A	N/A
11	MV2511-5,08-V	N/A	N/A	N/A
12	MV2512-5,08-V	N/A	N/A	N/A
..	MV25..-5,08-V	N/A	N/A	N/A