



**Applications:**  
Extra flex digital audio cable 110 Ω AES/EBU with small diameter, suitable for inner equipment wiring and/or for miniaturized plugs.

**Characteristics:**  
 Conductors: O.F.C. tinned copper  
 Cond. Insulation: PPE  
 Core colours: Red, Blue  
 Textile fillers between conductors  
 Drain wire: O.F.C. tinned copper  
 Shield: Spiral covering 100%  
 O.F.C. red copper  
 Sheath: Flame Retardant PVC  
 CEI 20-22/II°  
 Sheath colour: Black




tasker® Code	Cond. number	Nominal section AWG	Cond. Format. mm.	External Core Ø mm.	External Cable Diameter mm.	Reel or Spool (* pag. II)		
						mt.	Type	Kg.
C800	2	2 x 24 (0,22 mm <sup>2</sup> )	28x0,10	1,5	4,4	100	B	3,0

Conductor Resistance	Capacity Core/core	Capacity Core/shield
Ω/Km ± 5%	pF/mt	pF/mt
90	50	95
Impedance	Max rated Voltage AC - V	Operative Temperature °C
110	49	-15 / +70



**Applications:**  
Extra flex digital audio cable 110 Ω AES/EBU with double sheath suitable for microphone lines or DMX.

**Characteristics:**  
 Conductors: O.F.C. tinned copper  
 Cond. Insulation: PPE  
 Core colours: Red, Blue  
 Textile fillers between conductors  
 Drain wire: O.F.C. tinned copper  
 Shield: Spiral covering 100%  
 O.F.C. red copper  
 I° Sheath: PVC  
 II° Sheath: PVC  
 Sheath colour: Black

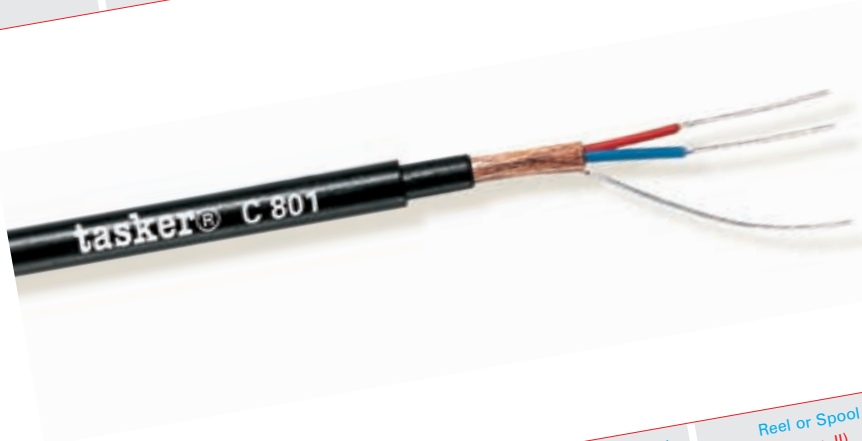

tasker® Code	Cond. number	Nominal section AWG	Cond. Format. mm.	External Core Ø mm.	External Inner Sheath Ø mm.	External Cable Diameter mm.	Reel or Spool (* pag. II)		
							mt.	Type	Kg.
C801	1x2	1 x 2 x 24 (0,22 mm <sup>2</sup> )	28x0,10	1,5	4,4	6,2	100	B	5,0

Conductor Resistance	Capacity Core/core	Capacity Core/shield
Ω/Km ± 5%	pF/mt	pF/mt
90	50	95
Impedance	Max rated Voltage AC - V	Operative Temperature °C
110	49	-15 / +70