


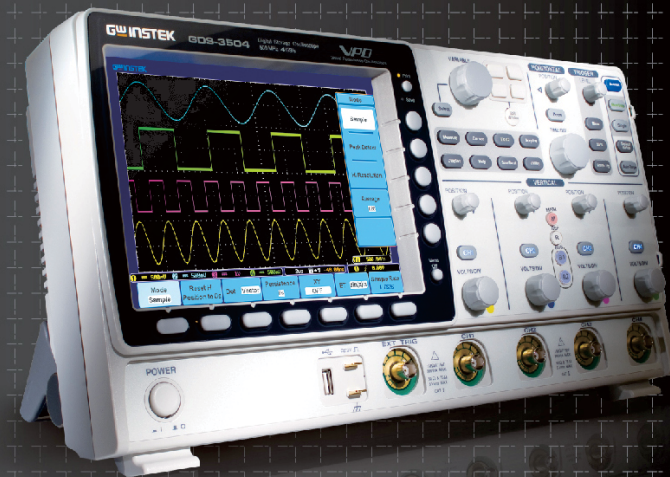

GDS-3000 Series

VPO

Visual Persistence Oscilloscope

500/350/250/150MHz Digital Storage Oscilloscope

3 Year WARRANTY

DISTRIBUTOR :

DS-3000GD6BH

Global Headquarters

GOOD WILL INSTRUMENT CO., LTD.

No.7-1, Jhongsing Road, Tucheng Dist., New Taipei City 236, Taiwan
T +886-2-2268-0389 F +886-2-2268-0639
E-mail: marketing@goodwill.com.tw

China Subsidiary

GOOD WILL INSTRUMENT (SUZHOU) CO., LTD.

NO. 69, Lushan Road, SND, Suzhou Jiangsu 215011 China
T +86-512-6661-7177 F +86-512-6661-7277
E-mail: marketing@instek.com.cn

Malaysia Subsidiary

GOOD WILL INSTRUMENT (M) SDN. BHD.

27, Persiaran Mahsuri 1/1, Sunway Tunas,
11900 Bayan Lepas, Penang, Malaysia
T +604-6309988 F +604-6309989
E-mail: sales@goodwill.com.my

U.S.A. Subsidiary

INSTEK AMERICA CORP.

3661 Walnut Avenue Chino, CA 91710, U.S.A.
T +1-909-5918358 F +1-909-5912280
E-mail: sales@instekamerica.com

Japan Subsidiary

INSTEK JAPAN CORPORATION

2F DSM Shin-Yokohama Bldg, 2-6-3, Shin Yokohama,
Kohoku-ku, Yokohama, Kanagawa 222-0033 Japan
T +81-45-476-5650 F +81-45-476-5653
E-mail: info@instek.co.jp

Korea Subsidiary

GOOD WILL INSTRUMENT KOREA CO., LTD.

#1406, Ace Hightech-City B/D 1Dong,
Mulle-Dong 3Ga 55-20, Yeongduangpo-Gu, Seoul, Korea
T +82-2-3439-2205 F +82-2-3439-2207
E-mail: gwinstek@gwinstek.co.kr

GW INSTEK
Simply Reliable

www.gwinstek.com

FEATURES

- 500/350/250/150MHz Bandwidth, 2/4 Input Channel
- 5GSa/s Real-time Sampling Rate and 100GSa/s Equivalent Time Sampling Rate
- 25k Points Memory for Each Input Channel
- VPO (Visual Persistence Oscilloscope) Technology to Display Less-Frequently-Occurred Signals
- 8" 800 x 600 High Resolution TFT LCD Display
- Unique Split Screen System with Independent Setting and Display for Each Input Channel
- Three Built-in Input Impedance Selections: 50Ω/75Ω/1MΩ
- Optional Power Analysis Software for Power Source Measurement and Analysis
- Optional Serial bus Analysis Software for Trigger & Decode of I²C, SPI and UART Interfaces

GW INSTEK
Simply Reliable

500/350/250/150 MHz Digital Storage Oscilloscope

VPO technology easily captures episodic events and reveals the complexity of the original signals.

5GSa/s real-time sampling rate accurately depict waveforms to satisfy a broad range of test applications.

50 Ω , 75 Ω and 1M Ω input impedances are built in to meet various test application needs.



The 8" TFT LCD display makes it easy to observe a signal.

The split-screen function enables each channel to be triggered and displayed independently.



GDS-3000 Series

VPO
Visual Persistence Oscilloscope

The GDS-3000 Series digital storage oscilloscope is a full-featured and powerful tool that allows you to tackle complex measurement issues with ease.

The GDS-3000 Series, carrying a maximum bandwidth of 500MHz, is equipped with a real-time sampling rate up to 5GSa/s and an equivalent-time sampling rate of 100GSa/s. The large 8-inch SVGA LCD screen, combined with the advanced digital signal processing technology VPO, provides meticulous detail and clarity for the displayed waveforms. The GDS-3000 Series gives you confidence not to miss any part of the test signal in the product verification and debugging stages and allows you to speed up your task without hesitation.


5GSa/s Sampling & VPO Technology

The GDS-3000 Series adopts VPO (Visual Persistence Oscilloscope) signal processing technology to enhance the performance of multi-gray-scale waveform display. The FPGA parallel processing, instead of conventional microprocessor architecture, is applied in GDS-3000 Series design to significantly increase the data processing speed and therefore increase the waveform update rate. This technology allows the GDS-3000 Series to display waveforms with various gray scales based on the occurrence frequencies, a fashion analogous to the analog oscilloscope display. As the visual persistence oscilloscope contains 3-dimension waveform data, including amplitude, time and intensity, for each waveform spot, it provides more useful signal information than a normal digital storage oscilloscope can do. The high-speed data processing of VPO technology enables the signal analysis of rapid events such as video, jitter, glitch and runt.


The GDS-3000 Series features a maximum real-time sampling rate of 5GSa/s, which is superior to most of the equivalent oscilloscopes available in the market today. (4GSa/s maximum sampling rate for GDS-3502 & GDS-3504 and 2.5GSa/s maximum sampling rate for GDS-3152 & GDS-3252). The series is also equipped with an equivalent-time sampling rate of 100 GSa/s, providing an economic solution for the waveform acquisition and reconstruction of very high-speed repetitive signals. The fast-acquisition capability along with VPO signal processing technology, make GDS-3000 a very handy tool for observing occasionally-occurred signals such as transient and inrush events. With powerful technology, GDS-3000 Series gives you full confidence in every acquisition of complex waveform that adheres to high-speed circuit design of modern products.

GDS-3000 Series **VPO**
Visual Persistence Oscilloscope


VPO Visual Persistence Oscilloscope Signal Processing Technology



Gray Mode



Color Mode



The GDS-3000 Series equipped with VPO signal processing technology and 5GSa/s high-speed real-time sampling rate, allows you to view the video signal clearly.

A Hi-tech DSO Platform

The GDS-3000 Series is a new platform of 4-input channels, 500MHz bandwidth, 5GSa/s sampling rate, and VPO waveform display. The split screen feature has been designed to meet the requirements of multi-window & multi-signal tests in the research and the manufacturing fields. The optional power analysis software and the optional serial bus analysis software are available to facilitate the engineer's tasks in testing and manufacturing of the associated products. Three new differential probes, GDP-025, GDP-050 & GDP-100, and five new current probes, GCP-005, GCP-020, GCP-100, GCP-530 & GCP-1030, are coming along with the GDS-3000 Series to provide total solutions for a wide variety of applications in the industry, service and education market sectors. The GDS-3000 Series, a high-tech platform carrying thoughtful features, brings very high customer value to both general purpose market and professional market.

Serial Bus Analysis Software and Power Quality Analysis Software

With widespread applications of embedded system adopting serial bus communication standards, resolving unexpected issues, such as propagation delay and bus contention, is often a challenge to design and testing engineers. The GDS-3000 Series provides (optional) design and testing engineers with powerful tools for the communication analysis and debugging of most the popular serial interface projects including I²C, SPI and UART.

To fulfill the increasing power measurement demands, as a green energy trend, GDS-3000 provides an embedded power analysis software (optional), which includes measurements of Power Quality, Harmonics, Ripple and Inrush Current, meeting requirements of most power measurement standards.

A High-tech Platform Carrying Advanced Technologies

1. 8" TFT LCD Panel

The bright 8" TFT LCD display makes multiple signal observation easy.

2. 5GSa/s Real-time Sampling Rate for Fast Waveform Capture

The high speed sampling technology used for data acquisition truthfully reconstructs complex signals.

3. Signal Processing Technology

VPO signal processing technology displays waveforms in 3 dimensions - amplitude, time and intensity.

4. Compact Design

With a depth of only 5 inches, the compact size of the product doesn't occupy valuable work space.

5. Split Window Function (Split Screen)

The GDS-3000 Series supports up to four independently operated and triggered windows at a time so that you can simultaneously monitor up to 4 signals carrying different characteristics.

6. Auto-Range Function

The Auto Range function automatically adjusts the time base and/or the vertical scale of displayed waveform when the frequency and/or the amplitude of input signal changed.

7. High Speed USB 2.0 Port

USB Host port for easy access of stored data.

8. Three Input Impedance Selections


The three built-in input impedances (75Ω, 50Ω, 1MΩ) can be selected to meet the requirements of various applications.

9. Serial Bus Triggering and Decode (Optional)

2 dedicated keys used for setting recall in the serial bus analysis applications supporting UART, I²C and SPI serial bus.

10. Independent Channel Design

The independent zone of vertical operations for each channel substantially increases the measurement efficiency.

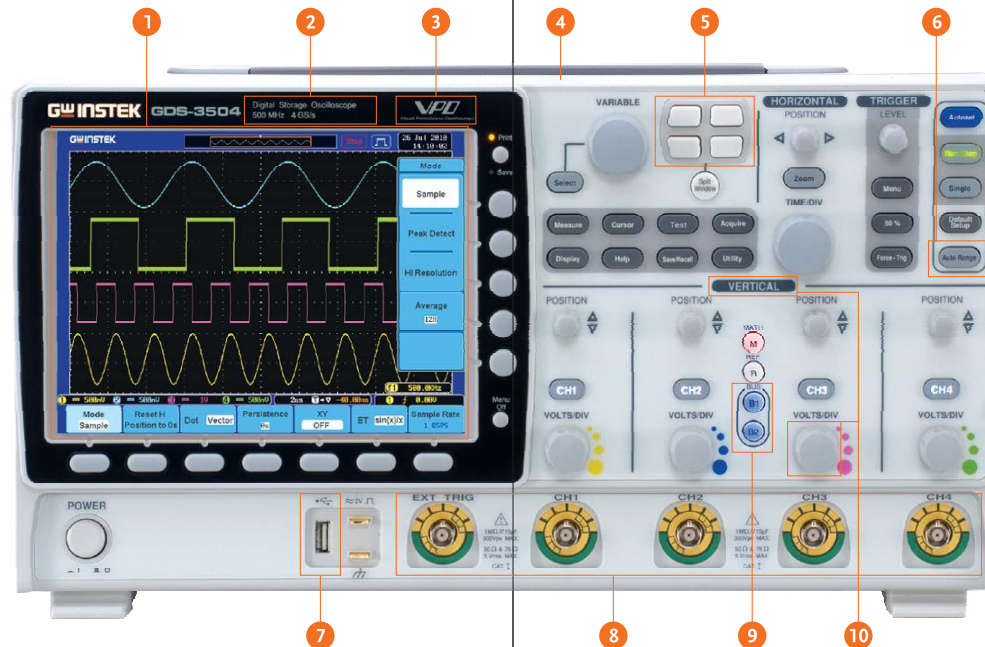

4 Channel Model




2 Channel Model

SELECTION GUIDE

Model	GDS-3504	GDS-3502	GDS-3354	GDS-3352	GDS-3254	GDS-3252	GDS-3154	GDS-3152
Bandwidth	500MHz	500MHz	350MHz	350MHz	250MHz	250MHz	150MHz	150MHz
Channels	4	2	4	2	4	2	4	2
Record Length	25k/Channel	25k/Channel	25k/Channel	25k/Channel	25k/Channel	25k/Channel	25k/Channel	25k/Channel
Real-Time Sampling	4 GSa/s	4 GSa/s	5 GSa/s	5 GSa/s	5 GSa/s	2.5 GSa/s	5 GSa/s	2.5 GSa/s
Equivalent-Time Sampling	100GSa/s	100GSa/s	100GSa/s	100GSa/s	100GSa/s	100GSa/s	100GSa/s	100GSa/s

* 2 Channels on Max Sampling Rate : 2GSa/s (GDS-3504/3502); 2.5GSa/s (GDS-3354/3352/3254/3154); 1.25GSa/s (GDS-3252/3152)

* 3, 4 Channels on Max Sampling Rate : 2GSa/s (GDS-3504); 1.25GSa/s (GDS-3354/3254/3154)

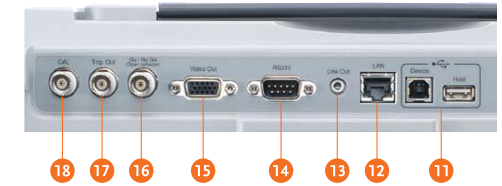

11. USB Ports as Standard

USB Host/Device interfaces for easy access of stored data and direct print-out through a PictBridge compatible printer.

12. LAN Port as Standard

LAN interfaces for remote control and monitoring.

13. Line Output

3.5mm stereo sound output for Go/NoGo buzzer.

14. RS-232 Interface

15. SVGA Video Output

SVGA video output port allows the transfer of DSO screen image to an external projector or monitor for remote monitoring or big screen observation.

16. Go/NoGo BNC

The open collector output signal allows external instrument to be controlled by the test result.


17. Trigger Output Port

A 5V TTL Level trigger signal is available for the synchronization with other devices.

18. Self-Calibration Signal Output

Self-Calibration signal output for input channel vertical gain calibration.


Multi-Language Support

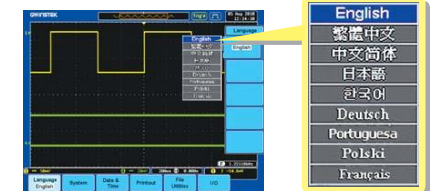

The GDS-3000 Series interface supports multiple languages to provide the utmost convenience for cross-country team cooperation and multinational engineering efforts.


500/350/250/150 MHz Digital Storage Oscilloscope

A. UNIQUE SPLIT SCREEN FUNCTION



The unique split screen feature of GDS-3000 Series allows each input channel to be operated independently with respective setting and waveform display. The time base, the vertical sensitivity, and the trigger selections can be done by each channel separately, and the waveform of each input signal can be shown on the individual part of the screen. This nearly four-DSO-in-one feature* is very useful for the applications that need to simultaneously see the details of multiple waveforms with very different characteristics. The 8-inch high resolution 800x600 LCD display makes the split screen a pleasant observation environment to view the details of complex signals.

C. AUTO RANGE for both TIME BASE and VERTICAL SCALE

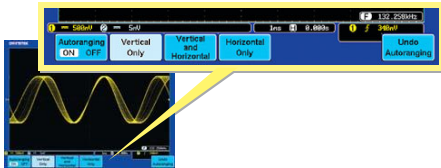


The Auto Range function automatically adjusts the time base and/or the vertical scale of displayed waveform when the frequency and/or the amplitude of input signal changed. This function gives user the convenience to have DSO always display waveform in a proper fashion on the screen tracking the frequency and amplitude changes of the input signal. It is especially useful when the user needs to alternately probe and test multiple circuit points containing signals with different frequencies and amplitudes.

E. 28 AUTOMATIC MEASUREMENTS




The GDS-3000 Series supports simultaneous measurement of up to 28 waveform measurement items grouped into three main waveform parameters: amplitude, time and delay measurements. The display modes include an individual mode and a Display All mode. The former can display any 8 of the automatic measurements while the later can display all the automatic measurements for a channel.

B. COMPLETE SET of TRIGGER FUNCTIONS




Besides Edge trigger, the GDS-3000 Series also offers various trigger functions, including Video, Pulse Width, Runt, Rise Time & Fall Time (specific time length), Alternate, Delay by Time, Delay by Event, and Hold-Off. The high sampling rate, the VPO signal processing & display, and the flexible trigger function all together make the GDS-3000 Series a powerful tool for waveform capture and display of various types of signals.

D. DUAL DISPLAY WINDOW ZOOM



The GDS-3000 Series Window Zoom function provides dual display mode to show the main waveform and the magnified section of zoomed-in waveform at the same time. Under "Zoom" mode, the width and the position of zoom-in window over the main waveform can be selected to get the magnified waveform as needed for detailed observation. To quickly and accurately move the zoom-in window to the expected position, the "Coarse" mode helps move the window to the needed position immediately and the "Fine" mode provides fine adjustment to precisely place the window in the exact position.


F. FFT TEST FUNCTION



To observe fundamental and harmonic frequency components of a signal, the FFT function on a digital storage oscilloscope is often used. Typically the traditional unit of the FFT is decibel (dB). However, when using dB it is sometimes difficult to identify the fundamental frequency of a signal from a noisy spectrum. With FFTrms function, the GDS-3000 Series can clearly display the fundamental frequency of an acquired waveform. The FFT function of GDS-3000 supports Rectangular, Hamming, Hanning, and Black-harris windows.

GDS-3000 Series Visual Persistence Oscilloscope

G. THREE INPUT IMPEDANCE SELECTIONS




Three input impedance, 1MΩ, 75Ω, and 50Ω are available for user's selection. The flexibility of impedance selections, including 1MΩ to get minimum loading effect, 75Ω to accommodate Video transmission applications and 50Ω to fit RF communication applications, extends the GDS-3000 Series utilization range.

I. EXTENDABLE APPLICATION SOFTWARE




The GDS-3000 Series allows future installation of additional application software at the user site. This provides an open environment for optional software upgrade and additional feature built-in whenever the GDS-3000 Series user has the need. The flexibility of software installation platform keeps the DSO being in use always up-to-date.

K. FREE REMOTE CONTROL SOFTWARE

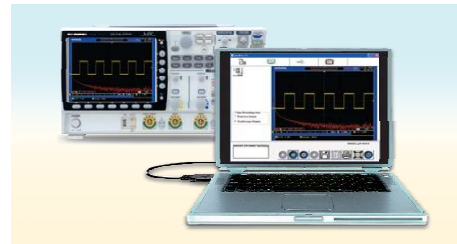

Using a USB port coupled with FreeWave remote monitoring software is the easiest and most convenient way to capture data from the GDS-3000 Series. With FreeWave, a screenshot can be saved as an image file (.bmp/.jpg) and waveform data (.csv). Not only can FreeWave monitor and record waveforms over a long period of time, but previously recorded waveforms can also be observed. Instrument settings can even be configured without the need to learn incomprehensible command line syntax. With the simple user interface and robust features, FreeWave allows you to get the most out of the GDS-3000 with little effort.

H. X-Y MODE



The X-Y mode of GDS-3000 defines CH1 and CH3 as the horizontal axis and CH2 and CH4 as the vertical axis, allowing the display of 2 sets of X-Y pattern simultaneously. The measurement items include Rectangular, Polar, Product and Ratio that fits most of the popular X-Y applications. The X-Y pattern and the time domain waveforms can be shown on the screen simultaneously. Two cursors on the time domain waveforms allow the identification of cursor-associated locations on the X-Y pattern display.

J. WAVEFORM FILE PREVIEW



The GDS-3000 provides an optimized operation interface for viewing screen captures. Generally, the oscilloscope may store large amounts of waveform data after a long period of time. To help prevent engineers from selecting the wrong file from a large number of stored waveform files, the screen capture preview function can be used to preview the waveform file without opening files so that operation of the oscilloscope is more efficient and convenient.

L. SVGA OUTPUT



A SVGA video output port in the rear panel of GDS-3000 Series allows the screen-image transfer from DSO to an external projector or a monitor for remote monitoring or big screen observation. This direct image transfer feature greatly increase the efficiency of presentation in the meeting, teaching in the class, remote monitoring of hazardous events from a secured zone, and fast and easy monitoring in the production line.

500/350/250/150 MHz Digital Storage Oscilloscope

M. VARIOUS INTERFACES SUPPORT



Two high-speed USB 2.0 Host ports located in both front panel and rear panel are used for easy access of stored data. In the rear panel, a USB Device port is available for remote control and hardcopy print-out through a PictBridge compatible printer. RS-232 and LAN interfaces are provided as standard for system communication & ATE applications.

A SVGA video output port allows the transfer of DSO screen image to an external projector or monitor for remote monitoring or big screen observation. A GPIB to USB adaptor is available as an option for interface conversion through the USB Device port in the front panel.


N. SERIAL BUS ANALYSIS SOFTWARE SUPPORTING I²C, SPI and UART (OPTIONAL)



I²C Serial Bus Analysis Software



SPI Serial Bus Analysis Software



UART Serial Bus Analysis Software



The GDS-3000 Series provides two dedicated keys in the front panel for two sets of setting recall

With serial bus technology being widely used in embedded applications, the proper triggering and analysis of flowing data, control signal and associated pulse waveforms in serial bus communication has been a difficult job and challenge to design engineers. The Serial Bus Analysis software of GDS-3000 Series carries complete analysis tools for triggering and decoding of commonly used serial bus interfaces, including I²C, SPI


and UART. Without spending time to study serial bus regulation details, the user only needs to set the trigger condition on GDS-3000 to get the data slots of interest.

** Only four-channel models support SPI function.*

O. POWER ANALYSIS SOFTWARE FOR POWER SUPPLY MEASUREMENTS (OPTIONAL)




Power Quality



Harmonics



Ripple



In-rush Current

The Power Analysis software contains four measurement functions, including Power Quality, Harmonics, Ripple and Inrush Current. The Power Quality analysis function allows the measurements of Voltage, Current, Frequency, Power and other quality related parameters for power source efficiency improvement. The Harmonics analysis function performs evaluation of power waveform distortion and gives harmonic

test data for power source design and quality check. This function is complied with IEC 61000-3-2 standard. The Ripple measurement function, acquiring the ripple and noise overriding the DC waveform, is used to evaluate the DC power source quality. The Inrush Current measurement function is used to measure the power-on surge current, which may cause the damage of the device circuit.

GDS-3000 Series

Current Probe and Differential Probe Selections



GCP-005/100/020



GCP-530/1030 & GCP-206P/425P



GDP-025



GDP-050/100

In addition to the standard passive probes, the optional current or differential probes can be used to perform additional tests or power analysis. The differential probes come in three bandwidths: 25MHz, 50MHz and 100MHz. The current probes come in a broad variety of bandwidth and current ranges (ranging from 50MHz/30A, 100MHz/30A, 10kHz/200A and 100kHz/100A), to cover any number of power supply testing applications.

** The GCP-530/1030 must be used in conjunction with the GCP-206P/425P current probe power supply.*

** The GCP-100 requires a standard 9V battery; The GCP-005 and GCP-020 do not require batteries or a power supply source.*

CURRENT PROBE						CURRENT PROBE POWER SUPPLY		
	GCP-005	GCP-100	GCP-020	GCP-530	GCP-1030		GCP -206P	GCP-425P
Probe Bandwidth	40Hz~1kHz	DC~100kHz	40Hz~40kHz	DC~50MHz	DC~100MHz	Compatible Current Probe	GCP-530 GCP-1030	GCP-530 GCP-1030
Rise Time	—	—	—	7ns or less	3.5ns or less	Number of Power Supply Connectors	2	4
Maximum Continuous Input Range	5A	0.05~10A(100mV/A) 1~100A(10mV/A)	0.1~24A(100mV/A) 0.5~240A(10mV/A)	30Arms	30Arms	Output Voltage	±12V± 0.5V	±12V± 0.5V
Maximum Peak Current Value	50A	100A	60A(100mV/A) 600A(10mV/A)	50Arms	50Arms	Rated Output Current	±600mA	±2.5A
Output Voltage Rate	10mV/A	100mV/A;10mV/A	10mV/A;100mV/A	0.1V/A	0.1V/A	Rated Supply Voltage (50/60Hz)	110V/120V,220V/240V AC±10%	100V~240V AC±10%
Amplitude Accuracy	±0.5%rdg ±0.1mV (50/60Hz) ±1.0%rdg ±0.2mV (40~1kHz)	≤3%±5mV (50mA~10A peak) ≤4%±500μV (0.5A~40A peak) ≤1.5%±5mV (100A~240A peak)	≤2%±50mV (100mA~20A peak) ≤3.5%±5mV (0.5~10A peak) ≤3%±5mV (10~40A peak) ≤1.5%±5mV (100A~240A peak)	±1.0%rdg±1mV (0~30Arms)/DC, 45~66Hz;±2.0%rdg (30Arms~50A peak /DC, 45~66Hz)	±1.0%rdg±1mV (0~30Arms)/DC, 45~66Hz;±2.0%rdg (30Arms~50A peak /DC, 45~66Hz)	Dimensions & Weight	73 (W)x110 (H)x 186 (D) mm ; Approx.1.1kg	80 (W)x119 (H)x 200 (D) mm ; Approx.1.1kg
Noise	—	—	—	2.5mArms or less	2.5mArms or less	Accessories	Power cord, fuse	Power cord, fuse
Rate Supply Voltage	—	—	—	±12V± 0.5V	±12V± 0.5V			
Maximum Rated Power	—	—	—	5.6VA	5.3VA			
Maximum Rated Voltage	600V, CAT III	600V, CAT III	600V, CAT III	300V, CAT I	300V, CAT I			

HIGH-VOLTAGE DIFFERENTIAL PROBE

	GDP-025	GDP-050	GDP-100
Probe Bandwidth	DC ~ 25MHz(attenutionsx50, x200) ; DC ~ 15MHz(attenutionsx20)	DC ~ 50MHz(attenutionsx200, x500, x1000) ; DC ~ 25MHz(attenutionsx100)	DC ~ 100MHz(attenutionsx200, x500, x1000) ; DC ~ 50MHz(attenutionsx100)
Attenuation	x20, x50, x200	x100, x200, x500, x1000	x100, x200, x500, x1000
Accuracy	±2%	±2%	±2%
Voltage Input Range (DC+AC peak to peak)	≤ 140Vp-p for x 20, ≤ 350Vp-p for x 50, ≤ 1400Vp-p for x 200	≤ 700Vp-p for x 100 ≤ 1400Vp-p for x 200 ≤ 3500Vp-p for x 500 ≤ 7000Vp-p for x 1000	≤ 700Vp-p for x 100 ≤ 1400Vp-p for x 200 ≤ 3500Vp-p for x 500 ≤ 7000Vp-p for x 1000
Permitted Max Input Voltage	Maximum differential voltage: Max voltage between input terminal and ground: 600Vrms	Maximum differential voltage: Max voltage between input terminal and ground: 650Vrms	Maximum differential voltage: Max voltage between input terminal and ground: 650Vrms
Input Impedance	Differential:4MΩ/1.2pF ; Between terminals and ground: 2MΩ/2.3pF	Differential:54MΩ/1.2pF ; Between terminals and ground:27MΩ/2.3pF	Differential: 54MΩ/1.2pF ; Between terminals and ground: 27MΩ/2.3pF
Output	≤ 7.0V	≤ 7.0V	≤ 7.0V
Output impedance	50Ω	50Ω	50Ω
Rise Time	14ns (x50, x200 attenuation) ; 23.4ns (x20 attenuation)	7ns (x200, x500, x1000 attenuation) ; 14ns (x100 attenuation)	3.5ns (x200, x500, x1000 attenuation) ; 7ns (x100 attenuation)
Rejection Rate on Common Mode (CMRR)	60Hz~80dB, 100Hz~60dB, 1MHz~50dB	60Hz~80dB, 100Hz~60dB, 1MHz~50dB	60Hz~80dB, 100Hz~60dB, 1MHz~50dB
Power Supply	External DC adapter	External DC adapter	External DC adapter
Consumption	Maximum 200mA(1.8Watt)	Maximum 200mA(1.8Watt)	Maximum 200mA(1.8Watt)

500/350/250/150 MHz Digital Storage Oscilloscope

SPECIFICATIONS								
	GDS-3152	GDS-3154	GDS-3252	GDS-3254	GDS-3352	GDS-3354	GDS-3502	GDS-3504
VERTICAL								
Channels	2Ch+EXT	4Ch+EXT	2Ch+EXT	4Ch+EXT	2Ch+EXT	4Ch+EXT	2Ch+EXT	4Ch+EXT
Bandwidth	DC~150MHz(-3dB)		DC~250MHz(-3dB)		DC~350MHz(-3dB)		DC~500MHz(-3dB)	
Rise Time	2.3ns		1.4ns		1ns		700ps	
Bandwidth Limit	20MHz		20M/100MHz		20M/100M/200MHz		20M/100M/200/350MHz	
Vertical Resolution	The bandwidth of the 75 Ω input impedance is limited to 150MHz only							
Vertical Resolution (1M Ω)								
Vertical Resolution (50/75 Ω)								
Input Coupling								
Input Impedance								
DC Gain Accuracy								
Polarity								
Maximum Input Voltage(1M Ω)								
Maximum Input Voltage(50/75 Ω)								
Offset Position Range								
Waveform Signal Process	2mV/div ~ 100mV/div : $\pm$ 0.5V ; 200mV/div ~ 5V/div : $\pm$ 25V Add, Subtract, Multiply, and Divide waveforms, Differentiation, Integration (App installation required)FFT, FFTrms ; FFT : Spectral magnitude. Set FFT vertical scale to Linear RMS or dBV RMS, and FFT window to Rectangular, Hamming, Hanning or Blackman-Harris.							
TRIGGER								
Source	2CH model: CH1, CH2, Line , EXT ; 4CH model: CH1 , CH2 , CH3 , CH4 , Line , EXT							
Trigger Mode	Auto (Supports Roll Mode for 100 ms/div and slower), Normal, Single							
Trigger Type	Edge, Pulse Width, Video, Runt, Rise & Fall, Alternate, Glitch Trigger, Duration Trigger, Slope Trigger Event-Delay(1~65,535 events),Time-Delay(10ns~10s),I ² C,SPI,UART(optional)							
Trigger Holdoff Range	10ns ~ 10s							
Coupling	AC, DC, LF rej. , HF rej. , Noise rej.							
Sensitivity	DC~30MHz Approx. 1div or 10mV; 50MHz~150MHz Approx. 1.5div or 15mV; 150MHz~350MHz Approx. 2div or 20mV; 350MHz~500MHz Approx. 2.5div or 25mV							
EXT TRIGGER								
Range	$\pm$ 15V							
Sensitivity	DC ~ 150MHz Approx. 100mV							
Input Impedance	150MHz ~ 250MHz Approx. 150mV;250MHz ~ 350MHz Approx. 150mV;350MHz~500MHz Approx. 200mV 1M Ω $\pm$ 3%, ~16pF							
HORIZONTAL								
Range	1ns/div ~ 100s/div (1-2-5 increments; GDS-3502/3504 1-2-5-5 increments)ROLL : 100ms/div ~ 100s/div							
Pre-trigger	10 div maximum							
Post-trigger	1,000 div max (depend on time base)							
Accuracy	$\pm$ 20 ppm over any $\geq$ 1 ms time interval							
X-Y MODE								
X-Axis Input/Y-Axis Input Phase Shift	Channel 1; Channel 3/Channel 2; Channel 4 $\pm$ 3°at 100kHz							
SIGNAL ACQUISITION								
Real Time Sample Rate	2.5GSa/s	5GSa/s	2.5GSa/s	5GSa/s	5GSa/s	5GSa/s	4GSa/s	4GSa/s
ET Sample Rate	100GSa/s maximum for all models							
Memory Depth	25k points							
Acquisition Mode	Normal, Average, Peak detect, High resolution, Single Average: 2 ~ 256 waveforms ; Peak detect: 2ns							
CURSORS AND MEASUREMENT								
Cursors	Amplitude, Time, Gating available							
Automatic Measurement	28 sets: Vpp, Vamp , Vavg, Vrms , Vhi , Vlo , Vmax , Vmin , Rise Preshoot/ Overshoot , Fall Preshoot/Overshoot, Freq , Period , Rise time , Fall time , Positive width , Negative width , Duty cycle, Phase, and eight different delay measurements (FRR, FRF, FFR, FFF, LRR, LRF, LFR, LFF)							
Cursors Measurement	Voltage difference between cursors (Δ V) Time difference between cursors (Δ T)							
Auto Counter	6 digits, range from 2Hz minimum to the rated bandwidth							
POWER MEASUREMENTS(OPTION)								
Power Quality Measurements	VRMS, VCrest factor, Frequency, IRMS, ICrest factor, True power, Apparent power, Reactive power, Power factor, Phase angle.							
Harmonics	Freq, Mag, Mag rms, Phase, THD-F, THD-R, RMS							
Ripple Measurements	Vripple ,Iripple							
In-rush current	First peak, second peak							
CONTROL PANEL FUNCTION								
Autoset	Single-button, automatic setup of all channels for vertical, horizontal and trigger systems, with undo autoset							
Auto-range	Allow automatically adjusts the time base and/or the vertical scale of displayed waveform when the frequency and/or the amplitude of input signal changed.							
Save Setup	20 sets							
Save Waveform	24 sets							

GDS-3000 Series

SPECIFICATIONS								
	GDS-3152	GDS-3154	GDS-3252	GDS-3254	GDS-3352	GDS-3354	GDS-3502	GDS-3504
DISPLAY SYSTEM								
TFT LCD Type	8" TFT LCD SVGA color display(LED Back-light)							
Waveform Update Rate	3500 wfms/sec							
Display Resolution	800 horizontal x 600 vertical pixels (SVGA)							
Interpolation	Sin(x)/x & Equivalent time sampling							
Waveform Display	Dots, Vectors, Variable persistence, Infinite persistence							
Display Graticule	8 x 10 divisions							
Display Brightness	Adjustable							
INTERFACE								
RS-232C	DB-9 male connector							
USB Port	2 sets USB 2.0 high-speed host port ;1 set USB high-speed 2.0 device port							
Ethernet Port	RJ-45 connector, 10/100Mbps							
SVGA Video Port	DB-15 female connector, monitor output for display on SVGA monitors							
GPIB	GPIB-to-USB Adapter (Optional)							
Go/NoGo BNC	5V Max/10mA TTL open collector output							
Internal Flash Disk	64MB							
Kensington Style Lock	Rear-panel security slot connects to standard Kensington-style lock							
Line Output	3.5mm stereo jack for Go/NoGo audio alarm							
OPERATING ENVIRONMENT								
Temperature	0℃ ~ 50℃, Relative Humidity≤80% at 40℃ or below ;≤ 45% at 41℃~50℃							
POWER SOURCE								
Line Voltage Range	AC 100V ~ 240V, 48Hz ~ 63Hz, auto selection							
MISCELLANEOUS								
Multi-Language Menu	Available							
On-Line Help	Available							
Time Clock	Time and date, provide the date/time for saved data							
DIMENSIONS & WEIGHT								
	400(W) X 200(H) X 130(D)mm, Approx. 4 kg							
* Three-year warranty, excluding probes & LCD display panel.								
Specifications subject to change without notice.								
ORDERING INFORMATION								
GDS-3502	500MHz, 2-Channel, Visual Persistence DSO							
GDS-3504	500MHz, 4-Channel, Visual Persistence DSO							
GDS-3352	350MHz, 2-Channel, Visual Persistence DSO							
GDS-3354	350MHz, 4-Channel, Visual Persistence DSO							
GDS-3252	250MHz, 2-Channel, Visual Persistence DSO							
GDS-3254	250MHz, 4-Channel, Visual Persistence DSO							
GDS-3152	150MHz, 2-Channel, Visual Persistence DSO							
GDS-3154	150MHz, 4-Channel, Visual Persistence DSO							
Accessories								
User manual CD x 1 ,Power cord x 1								
GTP-151R : 150MHz 10:1 passive probe for GDS-3152/3154(one per channel)								
GTP-251R : 250MHz 10:1 passive probe for GDS-3252/3254(one per channel)								
GTP-351R : 350MHz 10:1 passive probe for GDS-3352/3354(one per channel)								
GTP-501R : 500MHz 10:1 passive probe for GDS-3502/3504 (one per channel)								
Option								
DS3-PWR	Power analysis software: Power quality/Harmonic/Ripple/In-rush current measurements							
DS3-SBD	Serial Bus analysis software? 1 C/SPI/UART(only 4 channel models support SPI function)							
Optional Accessories								
GUG-001	GPIB to USB adapter		GSC-008		Soft Carrying Case			
GTP-033A	35MHz 1:1 Passive probe		GTL-110		Test lead, BNC to BNC connector			
GTP-352R	350MHz 20:1 Passive probe		GTL-232		RS-232C cable, 9-pin female to 9-pin female, Null modem for computer			
GDP-025	25MHz High voltage differential probe		USB 2.0 cable, A-B type cable 4P, 1800mm					
GDP-050	50MHz High voltage differential probe							
GDP-100	100MHz High voltage differential probe		GTL-246					
GCP-005	1kHz/5A Current probe		GRA-411		Rack Adapter Panel			
GCP-020	10kHz/200A Current probe		GDB-03		Oscilloscope Education and Training Kit			
GCP-100	100kHz/100A Current probe		GKT-100		Deskew fixture			
GCP-530	50MHz/30A Current probe							
GCP-1030	100MHz/30A Current probe							
GCP-206P	Power supply for current probe (2 input channel)							
GCP-425P	Power supply for current probe (4 input channel)							
GTL-248	GPIB Cable, Double Shielded, 2000mm							
GTL-251	USB-GPIB Adapter, GPIB-USB-HS, USB 2.0, Hi-Speed USB compliance, 2000mm							
Free Download								
PC Software	FreeWave software							
Driver	USB driver ; LabView driver							