


Connector Location A


Connector Location B

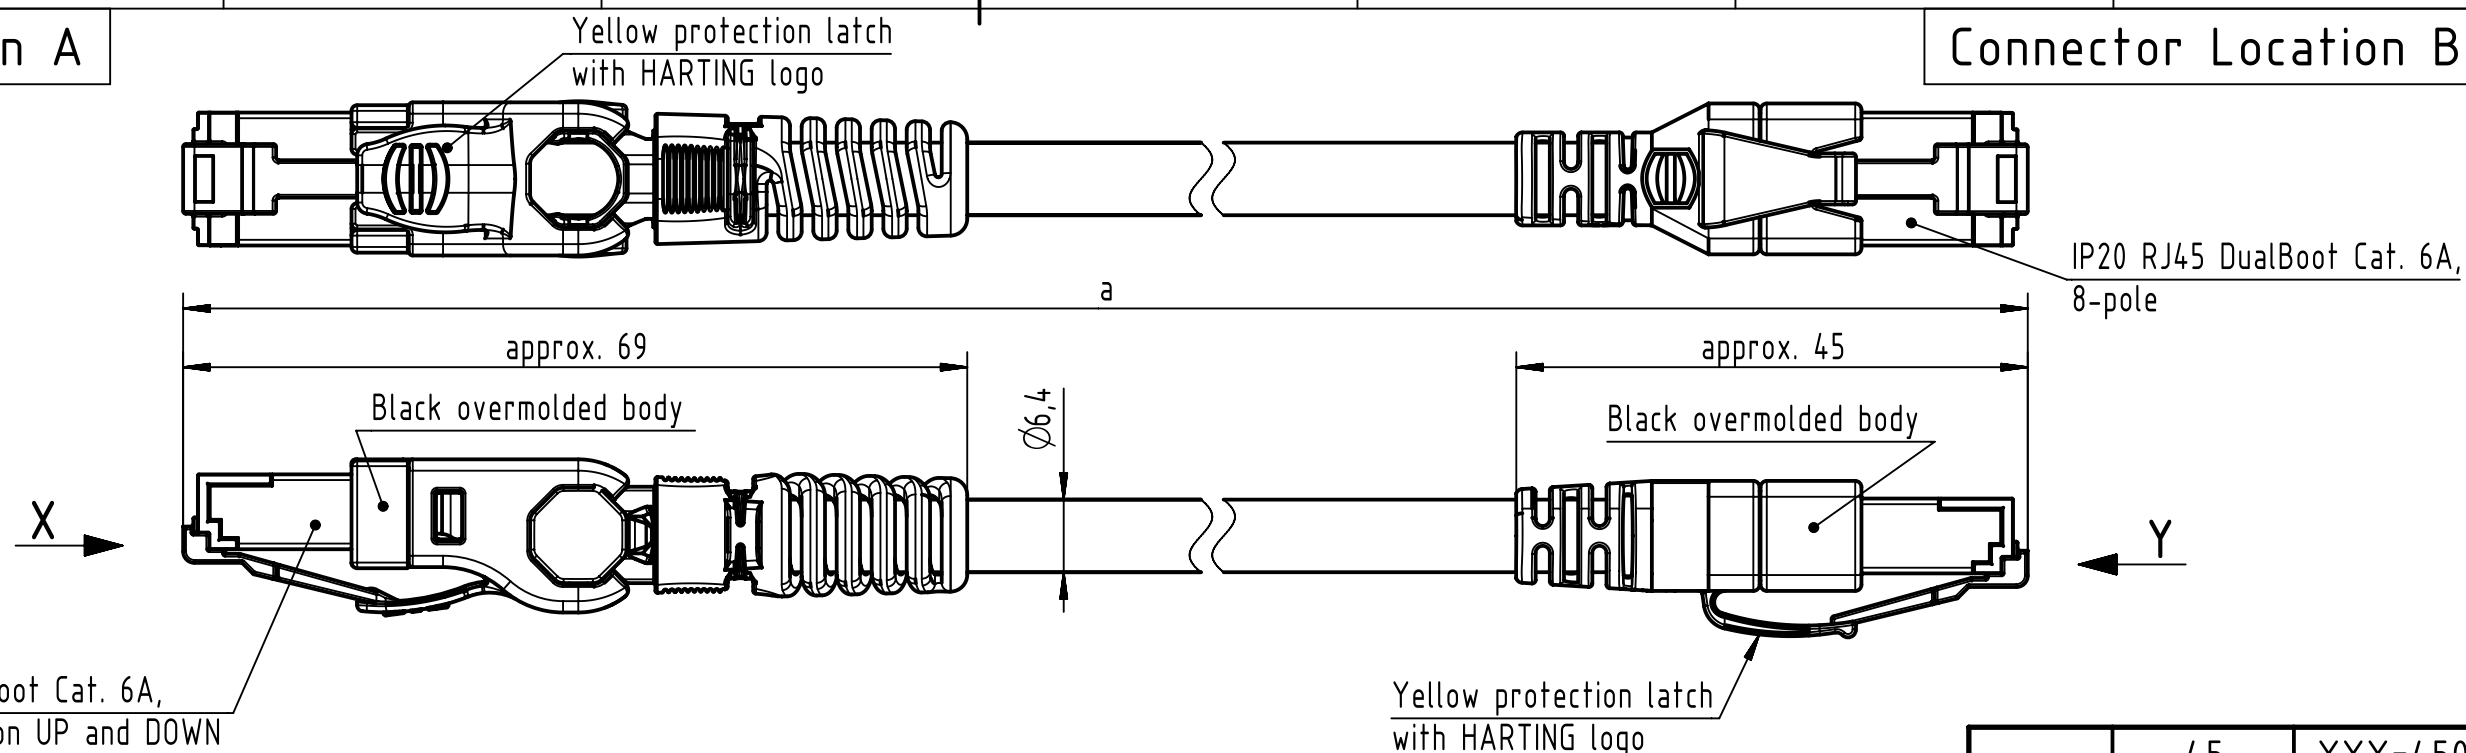

IP20 RJ45 VarioBoot Cat. 6A,
preferred direction UP and DOWN

Yellow protection latch
with HARTING logo


X
male

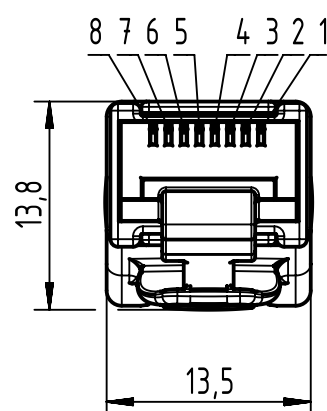

Y
male

Shield

1	white/orange	1
2	orange	2
3	white/green	3
4	blue	4
5	white/blue	5
6	green	6
7	white/brown	7
8	brown	8

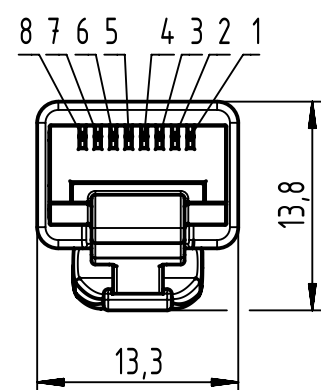

length in "1m" step	45	XXX=450
	44	XXX=440
	.	.
	12	XXX=120
length in "0.1m" step	11	XXX=110
	10	XXX=100
	9.9	XXX=099
	9.8	XXX=098
	.	.
	0.5	XXX=005
	0.4	XXX=004
	0.3	XXX=003
	0.2	XXX=002
Step	a [m]	XXX

6.0 to 45	±1%
0.6 to 5.9	+0.04
0.2 to 0.5	+0.02
a [m]	Tolerance

4x2xAWG 26/7, S/FTP,
PUR, Cat.7, yellow

09488447745XXX

Type of cable

Part no.

NOTE:

- Direction of the cable outlet can be changed up to 20x for the VarioBoot
- Mating face RJ45 acc. to IEC 60603-7 for both connectors

Temperature range:

- Fixed installation: -30°C ...+75°C
- Dynamic installation: -5°C ...+50°C

All Dimensions in mm		Tech. Character.		Free size tol.		According to production drawing	
All rights reserved		Created by BANCUD Banciu		Inspected by COSTEA Costea		Standardisation MUNTEANV Muntean	
Department HCS - RO		Title VarioBoot RJ45 UaD - DualBoot Cat.6A		Date 2019-09-23		State Final Release	
HARTING Customised Solutions		Type TB		Number 09488447745XXX		Doc-Key / ECM-Nr. 100796585/UGD/000/C 500000160478	
D-32339 Espelkamp		Rev. C		Page 1/1			