

# RAFIX 22 QR, keylock switch, round collar, frontring metallic silver, 1 x 90°, 1 x 40°, momentary contact function / latching, key removal position 0+2



## fields of application

- Measurement-control-regulation
- Electrical engineering
- Mechanical and system engineering
- Vehicle construction

## special features

- Key-operated switches with various rotation angles and key removal positions.
- For key switches with three switch positions (e.g. 2 x 90 degrees with neutral position), the left or right switch element is actuated depending on the direction of rotation.
- Design adaptations through different front ring colors
- Firmly injection-molded collar seal, cannot twist or be lost during installation.
- 1-person mounting: the element is clamped by the seal in the mounting hole and can then be screwed from behind.
- Robust - suitable also for operation with gloves
- Degree of protection: IP 65 at the front
- Additional protection against twisting due to threaded ring with claw
- Installation diameter 22.3 mm
- Separate switching elements required
- Close mounting of actuators possible (min. 30 x 50 mm), as wiring is axial from behind
- Switching elements with silver contacts (max. 400 V) or gold contacts (max. 35 V / 100 mA)
- Connection types switching elements: cage clamp, screw connection or plug-in connection



description

RAFIX control units are modular units consisting of several parts. In the RAFIX 22 QR family, they always consist of an actuating element, coupling and switching element. Then this unit is snapped onto the key switch. To release, a bayonet lever must be actuated.

RAFIX 22QR key switches have the specified tactility and function only when assembled with the appropriate switching elements. You can choose between two collar shapes: round and square. The mounting diameter is 22.3 mm according to the standard. The anti-rotation lug can be easily removed with a screwdriver if necessary.

The locking systems we use were created according to the DIN EN 1303 standard by well-known lock manufacturers. They are open, mechanical systems which, depending on the environmental conditions, require occasional maintenance by the machine or system operator.

technical data

> general

|                                                             |                                                                      |                 |
|-------------------------------------------------------------|----------------------------------------------------------------------|-----------------|
| Scope of delivery                                           | 2 keys                                                               | direct links    |
| Front ring color                                            | metallic silver                                                      |                 |
| Collar shape                                                | round                                                                | > RAFI eCatalog |
| Operating temperature, min.                                 | -25 °C                                                               |                 |
| Storage temperature, min.                                   | -40 °C                                                               |                 |
| Operating temperature, max.                                 | 70 °C                                                                |                 |
| Storage temperature, max.                                   | 80 °C                                                                |                 |
| illuminated                                                 | No                                                                   |                 |
| Packaging                                                   | Box                                                                  |                 |
| Packaging unit                                              | 2 pcs.                                                               |                 |
| net weight                                                  | 42.3 g                                                               |                 |
| Operating life                                              | 50,000 cycles                                                        |                 |
| B10                                                         | 65,000 cycles                                                        |                 |
| Degree of protection, front side, according to DIN EN 60529 | IP65                                                                 |                 |
| Environment resistance                                      | IEC 60068-2-14<br>IEC 60068-2-30<br>IEC 60068-2-33<br>IEC 60068-2-78 |                 |
| Protection class                                            | II                                                                   |                 |
| MOQ order                                                   | 2 pcs.                                                               |                 |
| RoHS compliant                                              | Yes                                                                  |                 |
| REACH compliant                                             | Yes                                                                  |                 |

> mounting diameters


|                           |            |
|---------------------------|------------|
| Mounting hole             | 22.3 mm    |
| Mounting depth            | 56.4 mm    |
| Installation height       | 30.6 mm    |
| Grid, min.                | 50 x 30 mm |
| Outside dimension, length | 29.8 mm    |

|                           |           |
|---------------------------|-----------|
| Outside dimension, width  | 29.8 mm   |
| Outside dimension, height | 53.5 mm   |
| Collar dimension          | ø 29,8 mm |

**> mechanical data**

|                            |                                       |
|----------------------------|---------------------------------------|
| Actuation function         | momentary contact function / latching |
| Operating force, min.      | 5 N                                   |
| Operating torque, max.     | 2 Nm                                  |
| Locking position           | 455                                   |
| Key lock                   | Ronis                                 |
| Key removal position       | 0+2                                   |
| Rotating angle             | 1 x 90°, 1 x 40°                      |
| Fixing                     | Threaded ring                         |
| Threaded ring torque, max. | 1.2 Nm                                |

## Dimensioned drawing

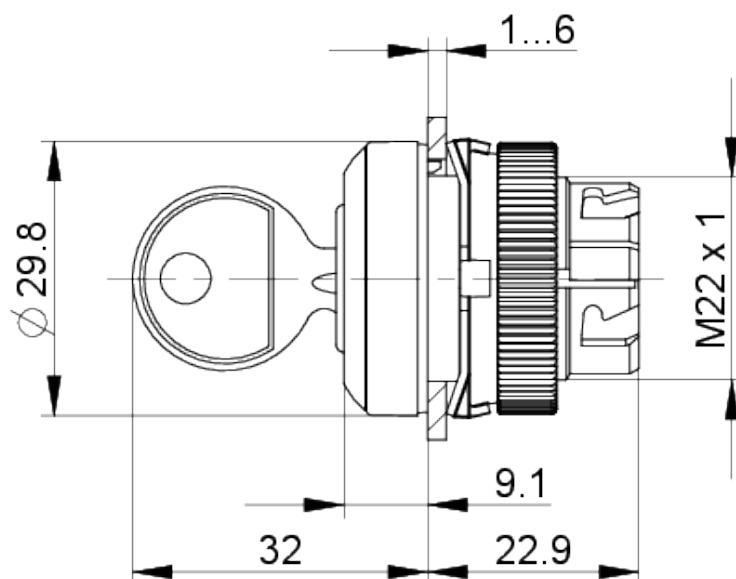

The technical drawing shows two views of the M6000-1000 motor:

- Side View (Left):** Shows the motor's profile with dimensions: total width 56.4, mounting flange diameter 39.5, main body height 46, and total height 50. A dimension of 1...6 indicates the thickness of the mounting flange. Labels include "contact block" pointing to the top terminal area.
- Front View (Right):** Shows the circular motor face with a central shaft. The diameter of the main body is 30. A label "coupling" points to the internal coupling mechanism visible through the center.

## front panel drawing

