


EPIC® MC Dummy Module

The mixed assembly guarantees high flexibility. For applications in machine and plant engineering, for robotics and slide-in technology.


The blinding module is ideal for reserving a space for later use. It is suitable for printing presses or control systems.

Info


Dummy module as a placeholder for future expansion

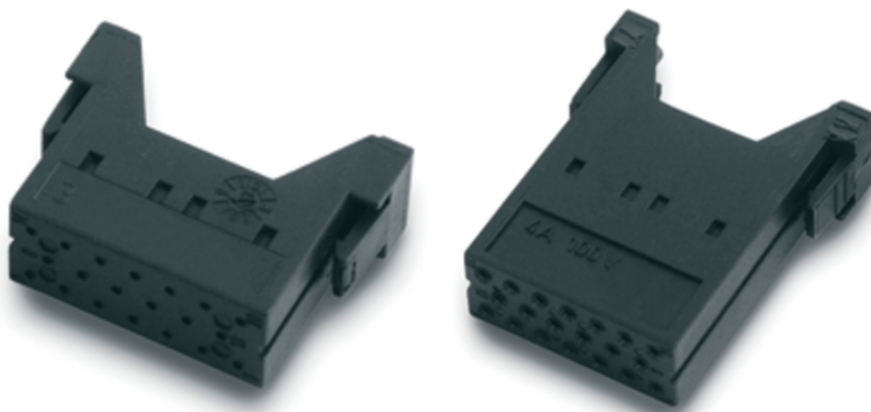

M

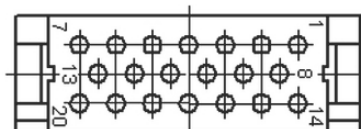

F

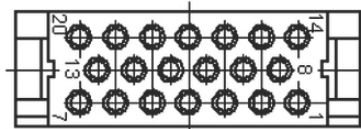

Supplementary automation components from Lapp



Mechanical and plant engineering



Wind Energy

Benefits

The mix of different functions in one plug guarantees high flexibility
Assembly of individual connectors, suitable for different applications

Application range

Plant engineering
Printing machines
Control engineering

Technical Data

Classification ETIM 5:

ETIM 5.0 Class-ID: EC002641

ETIM 5.0 Class-Description: Modular connector (industrial connector)

Classification ETIM 6:

ETIM 6.0 Class-ID: EC002641

ETIM 6.0 Class-Description: Modular connector (industrial connector)

Temperature range:

-40 °C to +100 °C, short-term up to +125 °C

Last Update (15.06.2023)

©2023 Lapp Group - Technical changes reserved

Product Management www.lappkabel.de

You can find the current technical data in the corresponding data sheet.

PN 0456 / 02_03.16

EPIC® MC Dummy Module

Note

Photographs and graphics are not to scale and do not represent detailed images of the respective products.
Prices are net prices without VAT and surcharges. Sale to business customers only.

EPIC® MC Dummy Module

Article number	Article description	Contact type	Slots	Pieces / PU
Dummy module				
10399400	MCS 0 Blind	male	1	10
10399500	MCB 0 Blind	female	1	10

Last Update (15.06.2023)

©2023 Lapp Group - Technical changes reserved

Product Management www.lappkabel.de

You can find the current technical data in the corresponding data sheet.

PN 0456 / 02_03.16