
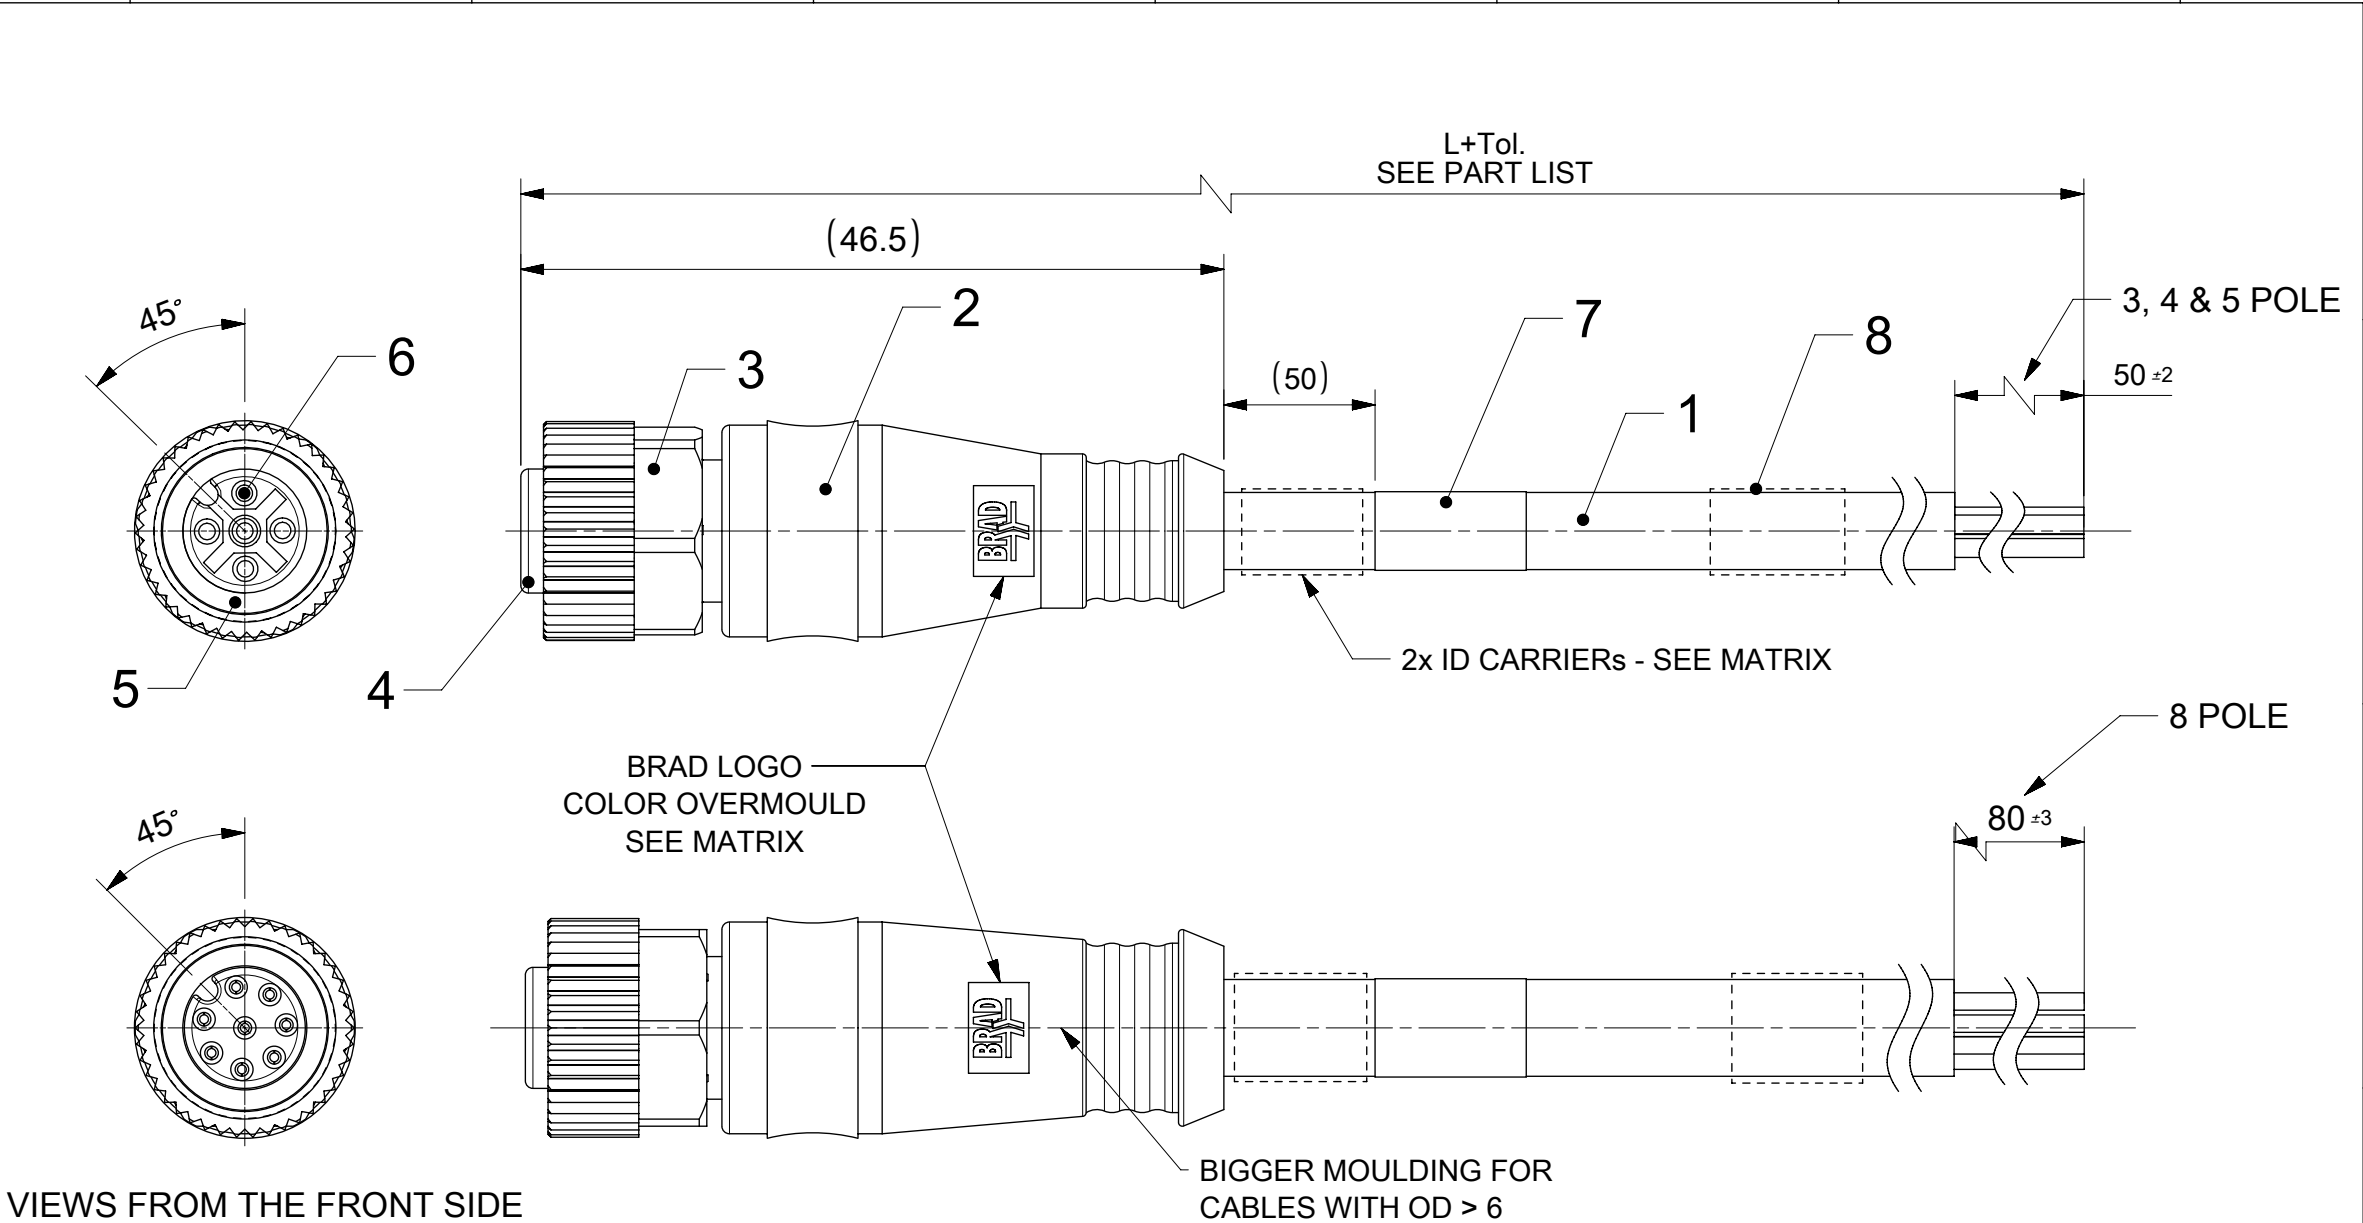


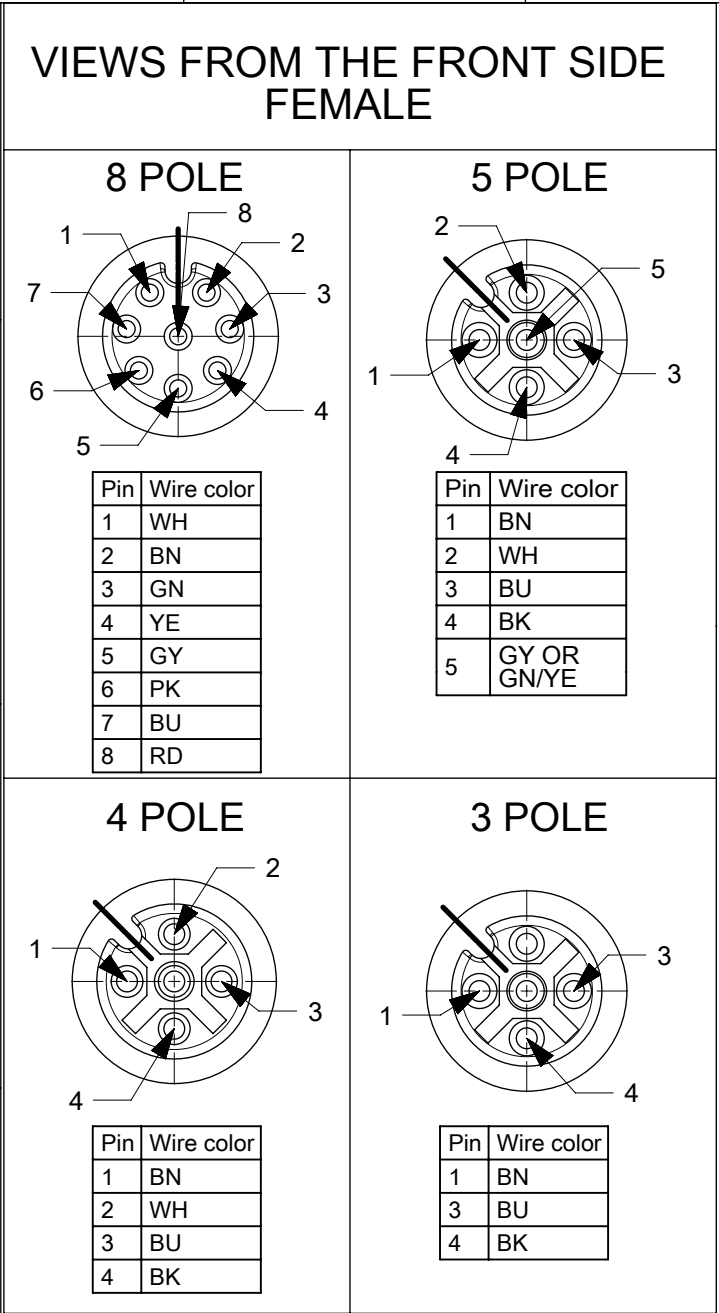

NOTES:

TEMPERATURE RANGE : SEE CABLE LIST

RATED VOLTAGE: 3, 4 contacts : 250V

5 contacts : 60V

8 contacts : 30V

RATED CURRENT: 3, 4, 5 contacts : 4A

8 contacts : 2A

INSULATION RESISTANCE: 10⁸ Ω MIN.

MATING CYCLES: MIN. 100

ENVIRONMENTAL:PROTECTION: IP67 IN MATED AND LOCKED POSITION

BILL OF MATERIAL				
8	0/2	I/D CARRIER	-	-
7	1	LABEL	VINYL	YELLOW
6	3/4/5/8	CONTACTS	BRASS	GOLD OVER Ni-PLATED
5	1	GASKET	FPM	RED
4	1	FEMALE INSERT	PUR	BLACK
3	1	COUPLING NUT	BRASS	Ni-PLATED
2	-	OVERMOULD	TPU	BLACK
1	-	CABLE	SEE CABLE LIST	SEE CABLE LIST
ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH/COLOR

FUNCTIONAL SYMBOLS

FA

=

0

FE

=

0

FE

=

0

GENERAL TOLERANCES (UNLESS SPECIFIED)

ANGULAR TOL ± 1.0 °

DIVISIONAL SYMBOLS

4 PLACES ±

3 PLACES ±

2 PLACES ± 0.05

1 PLACE ± 0.3

0 PLACES ± 0.5

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

CURRENT REV DESC: NEW P/N ADDED

EC NO: 801104

DRWN: RSCHIEBER

CHK'D: RSILLER

APPR: RSILLER

INITIAL REVISION:

DRWN: SSM

APPR: RSILLER

THIRD ANGLE PROJECTION

DRAWING

SERIES

MATERIAL NUMBER

CUSTOMER

SHEET NUMBER

SCALE

2:1

2024/10/14

2024/10/14

2024/10/14

2021/12/16

2022/02/28

A3-SIZE

120065

SEE PART LIST

GENERAL MARKET

1 OF 3

molex

CSE M12 XP AC FE STR WSOR XM SE UNSH BK

PRODUCT CUSTOMER DRAWING

DOCUMENT NUMBER

1200652251

DOC TYPE

PSD


DOC PART

000





REVISION

B2

NOTES:
RATED VOLTAGE:
3, 4 contacts 250V
5 contacts 60V
8 contacts 30V
RATED CURRENT:
3, 4, 5 contacts 4A
8 contacts 2A
PROTECTION CLASS: IP 67

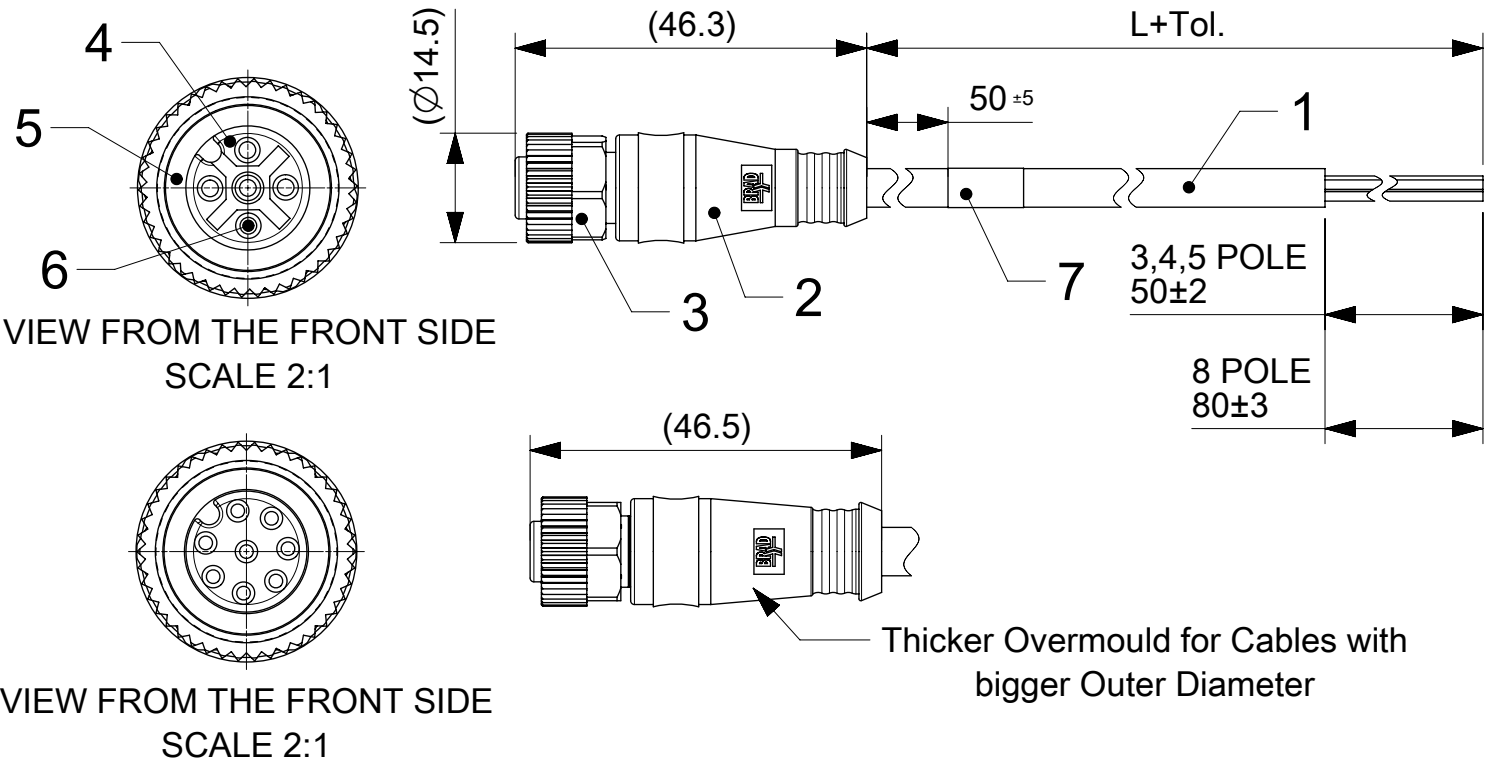

CONTACTS POSITION FRONT VIEW:

	3 CONTACTS	4 CONTACTS	5 CONTACTS	8 CONTACTS																																																
FEMALE																																																				
CONNECTIONS	<table><tr><th>PIN</th><th>WIRE</th></tr><tr><td>1</td><td>BROWN</td></tr><tr><td>3</td><td>BLUE</td></tr><tr><td>4</td><td>BLACK</td></tr></table>	PIN	WIRE	1	BROWN	3	BLUE	4	BLACK	<table><tr><th>PIN</th><th>WIRE</th></tr><tr><td>1</td><td>BROWN</td></tr><tr><td>2</td><td>WHITE</td></tr><tr><td>3</td><td>BLUE</td></tr><tr><td>4</td><td>BLACK</td></tr></table>	PIN	WIRE	1	BROWN	2	WHITE	3	BLUE	4	BLACK	<table><tr><th>PIN</th><th>WIRE</th></tr><tr><td>1</td><td>BROWN</td></tr><tr><td>2</td><td>WHITE</td></tr><tr><td>3</td><td>BLUE</td></tr><tr><td>4</td><td>BLACK</td></tr><tr><td>5</td><td>GREY OR GREEN/YELLOW</td></tr></table>	PIN	WIRE	1	BROWN	2	WHITE	3	BLUE	4	BLACK	5	GREY OR GREEN/YELLOW	<table><tr><th>PIN</th><th>WIRE</th></tr><tr><td>1</td><td>WHITE</td></tr><tr><td>2</td><td>BROWN</td></tr><tr><td>3</td><td>GREEN</td></tr><tr><td>4</td><td>YELLOW</td></tr><tr><td>5</td><td>GREY</td></tr><tr><td>6</td><td>PINK</td></tr><tr><td>7</td><td>BLUE</td></tr><tr><td>8</td><td>RED</td></tr></table>	PIN	WIRE	1	WHITE	2	BROWN	3	GREEN	4	YELLOW	5	GREY	6	PINK	7	BLUE	8	RED
PIN	WIRE																																																			
1	BROWN																																																			
3	BLUE																																																			
4	BLACK																																																			
PIN	WIRE																																																			
1	BROWN																																																			
2	WHITE																																																			
3	BLUE																																																			
4	BLACK																																																			
PIN	WIRE																																																			
1	BROWN																																																			
2	WHITE																																																			
3	BLUE																																																			
4	BLACK																																																			
5	GREY OR GREEN/YELLOW																																																			
PIN	WIRE																																																			
1	WHITE																																																			
2	BROWN																																																			
3	GREEN																																																			
4	YELLOW																																																			
5	GREY																																																			
6	PINK																																																			
7	BLUE																																																			
8	RED																																																			

FOR OPTION SEE - NUMERICAL CODE - ON SHEET 2

7	1	LABEL YE	VINYL	-
6	3/4/5/8	CONTACT FE	BRASS	GOLD OVER Ni-PLATED
5	1	GASKET RD	FPM	-
4	1	INSERT M12 FE XP BK	PUR	-
3	1	COUPLING NUT M12 FE	SEE SHEET 2	SEE SHEET 2
2	-	OVERMOULDING	SEE SHEET 2	SEE SHEET 2
1	-	CABLE	SEE SHEET 2	-
ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH

FUNCTIONAL SYMBOLS

$\nabla_A = 0$

$\nabla_E = 0$

$\nabla_F = 0$

DIVISIONAL SYMBOLS

DIMENSION UNITS

mm

SCALE

1:1

GENERAL TOLERANCES (UNLESS SPECIFIED)

ANGULAR TOL ± °

4 PLACES ±

3 PLACES ±

2 PLACES ±

1 PLACE ±

0 PLACES ±

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

CURRENT REV DESC: STANDARDIZATION

EC NO: 681756

DRWN: MKOWALCZYK01

CHK'D: ALEKSP3

APPR: KMARCINIAK01

INITIAL REVISION:

DRWN: AKONDRACIUK

APPR: MIWASIECZKO

THIRD ANGLE PROJECTION

DRAWING

SERIES

MATERIAL NUMBER

CUSTOMER

SHEET NUMBER

molex

CSE M12 XP AC FE STR WSOR XM SE UNSH

PRODUCT CUSTOMER DRAWING

DOCUMENT NUMBER

1200652251

DOC TYPE

PSD

DOC PART

00P

REVISION

B2

SEE PART LIST

1 OF 2

ENGINEERING NO - NUMERICAL CODE (Available parts see PART LIST table. Other parts available upon request).

8

0

X

0

0

0

B

X

X

M

X

X

X

X

88 = M12x1
SINGLE ENDED

POLES:
3 = 3 POLES
4 = 4 POLES
5 = 5 POLES
8 = 8 POLES

HEADER:
000 = PLUG FEMALE STRARIGHT

CABLE TYPE:
SEE TABLE


UNIT:
M = METER

LENGTH:
EXAMPLE:
010 = 1 m
050 = 5 m
100 = 10 m

Overmold color:
Blank (Standard)=Black
A=Grey / G=Black / Y=Yellow / R=Red

Coupling Nut:
Blank (Standard)=Knurled/Hex Brass, Ni Plated
5=Knurled Derlin
7=Knurled Brass Ni Plated, Teflon Coated

H= 2 pcs. of I/D Carrier PVC Transparent
(Cables B36 always with
2 pcs. I/D Carrier)

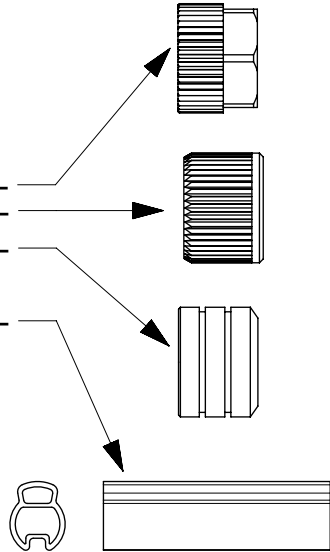

OPTIONS

CABLE INFORMATION (for more information see Cable Data Sheet).

CABLE TYPE	NO. OF WIRES	CROSS SECTION	CABLE JACKET	UL	CSA	STATIC: TEMP. / BENDING RADIUS	DYNAMIC: TEMP. / BENDING RADIUS	DRAG CHAIN: TEMP. / BENDING RADIUS	DRAG CHAIN	CABLE SPEC. DRAWING
B30	3 / 4 / 5	0.34mm²	TPU Black	UL 21215/758	C22.2 I/II A/B 80°/600V	-40°C to +90°C 5xO.D.	-25°C to +80°C 7.5xO.D.	-5°C to +60°C 7.5xO.D.	up to 5 000 000 cycles at temp 20°C	SD-120209-001
B33	4 / 5	0.34mm²	TPU Gray							SD-120209-001
B36	4 / 5	0.34mm²	TPU Orange							SD-120209-001
B39	5	0.75mm²	TPU Gray							n/a
B41	8	0.25mm²	TPU Black							SD-120209-006
B42	5	0.34mm²	TPU Black							SD-120209-001
B49	8	0.25mm²	TPU Orange							SD-120209-006
B55	3 / 4 / 5	0.34mm²	TPU Yellow							n/a

TABLE OF LENGTH TOLERANCES				
OVER	UP TO AND INCLUDING	TOLERANCE		
0	1000	+40 0		
1000	5000	+60 0		
5000	10000	+80 0		
10000	20000	+140 0		
20000	30000	+160 0		
30000	>	+1% OF LENGTH		
DOCUMENT STATUS	P1	RELEASE DATE	2021/10/18	12:08:57

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		CURRENT REV DESC: STANDARDIZATION			
	DIMENSION UNITS	SCALE	molex			
DIVISIONAL SYMBOLS	mm		1:1		GENERAL TOLERANCES (UNLESS SPECIFIED)	
	ANGULAR TOL		± °		4 PLACES ±	
	3 PLACES ±		2 PLACES ±		1 PLACE ±	
	0 PLACES ±		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION	
	DRAWING		SERIES		MATERIAL NUMBER	
	A3-SIZE		120065		CUSTOMER	
	EC NO: 681756		DRWN: MKOWALCZYK01		2021/10/18	
	CHK'D: ALEKSP3		APPR: KMARCINIAK01		2021/10/18	
	INITIAL REVISION:		DRWN: AKONDRACIUK		2016/11/26	
	APPR: MIWASIECZKO		2016/12/06		DOCUMENT NUMBER	
	SEE PART LIST		1200652251		DOC TYPE	
	PSD		00P		REVISION	
	2 OF 2		B2		SHEET NUMBER	

FORMAT: master-b-prod-A3
REVISION: 11
DATE: 2021/05/01

987654321