

F

E

D

C

B

A

F

E

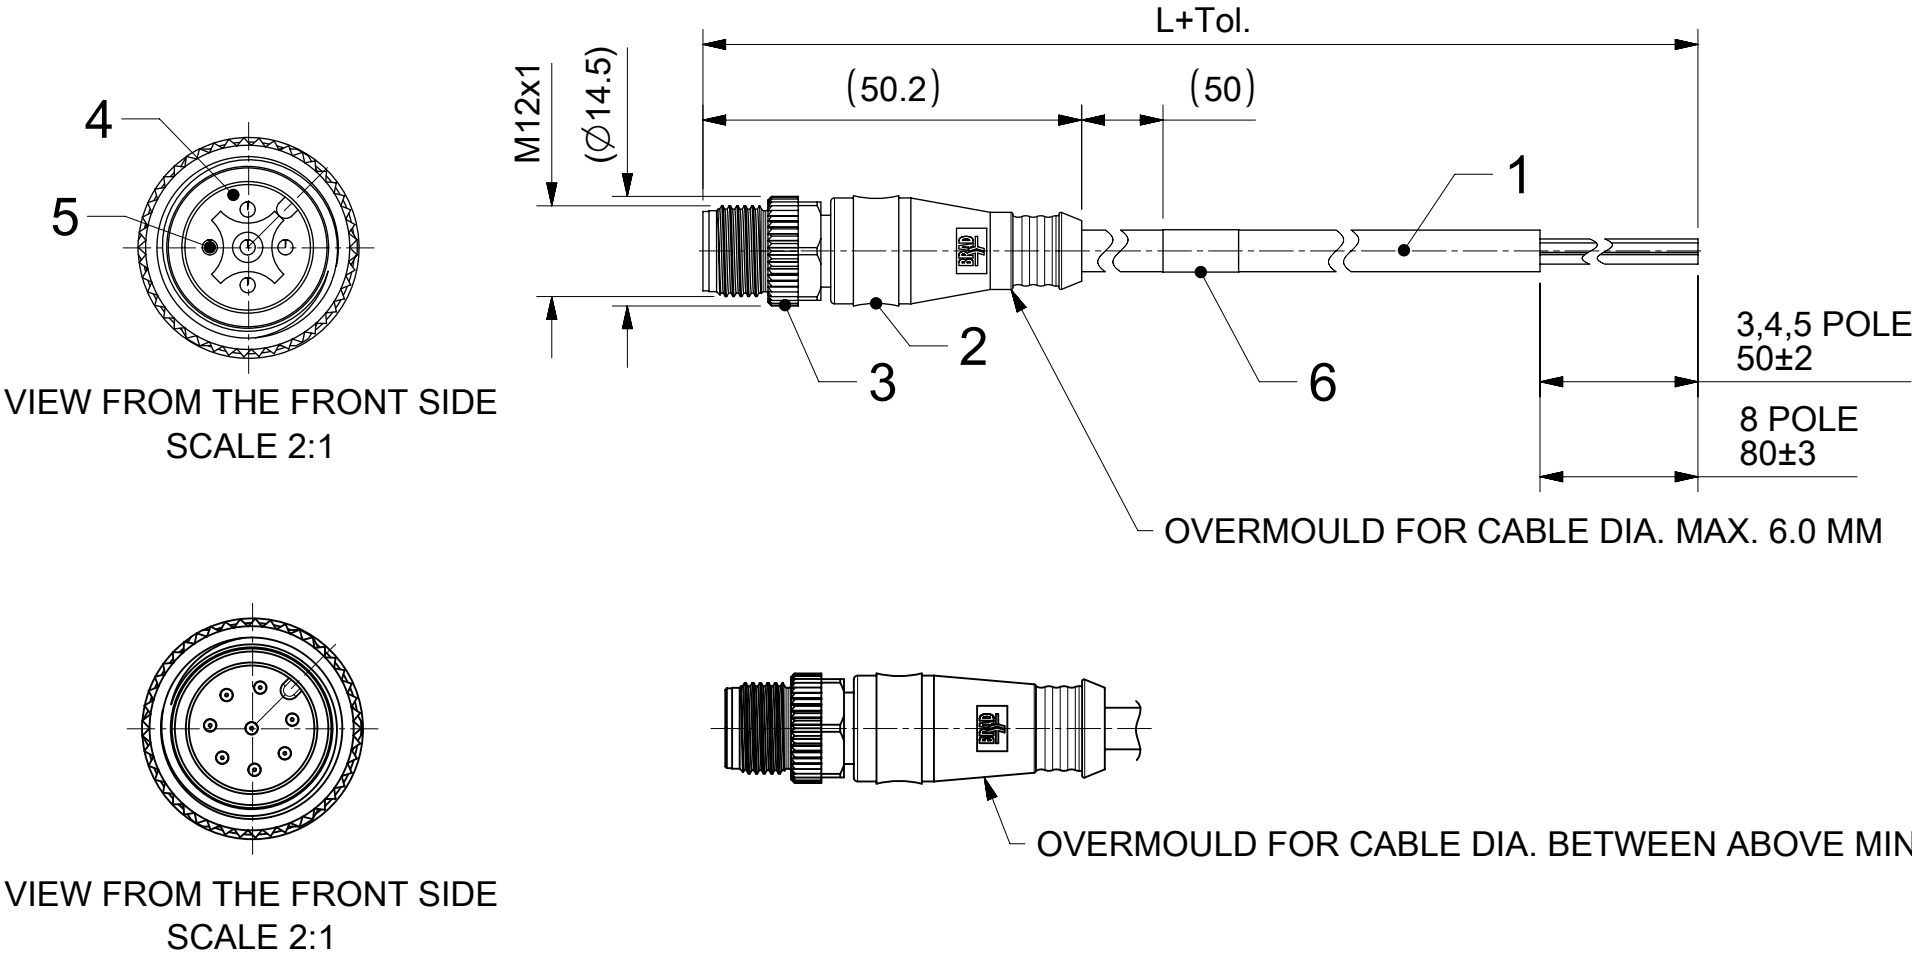
D

C





B

A

NOTES:
RATED VOLTAGE: 3, 4 contacts 250V
5 contacts 60V
8 contacts 30V
RATED CURRENT: 3, 4, 5 contacts 4A
8 contacts 2A
TEMPERATURE: SEE CABLE INFORMATION
INSULATION RESISTANCE: 10⁸ Ω MIN.
MATING CYCLES: MIN. 100
ENVIRONMENTAL:PROTECTION: IP67 IN MATED AND LOCKED POSITION



CONTACTS POSITION FRONT VIEW:

	3 CONTACTS	4 CONTACTS	5 CONTACTS	8 CONTACTS																																																
MALE																																																				
CONNECTIONS	<table><tr><th>PIN</th><th>WIRE</th></tr><tr><td>1</td><td>BROWN</td></tr><tr><td>3</td><td>BLUE</td></tr><tr><td>4</td><td>BLACK</td></tr></table>	PIN	WIRE	1	BROWN	3	BLUE	4	BLACK	<table><tr><th>PIN</th><th>WIRE</th></tr><tr><td>1</td><td>BROWN</td></tr><tr><td>2</td><td>WHITE</td></tr><tr><td>3</td><td>BLUE</td></tr><tr><td>4</td><td>BLACK</td></tr></table>	PIN	WIRE	1	BROWN	2	WHITE	3	BLUE	4	BLACK	<table><tr><th>PIN</th><th>WIRE</th></tr><tr><td>1</td><td>BROWN</td></tr><tr><td>2</td><td>WHITE</td></tr><tr><td>3</td><td>BLUE</td></tr><tr><td>4</td><td>BLACK</td></tr><tr><td>5</td><td>GREY OR GREEN/YELLOW</td></tr></table>	PIN	WIRE	1	BROWN	2	WHITE	3	BLUE	4	BLACK	5	GREY OR GREEN/YELLOW	<table><tr><th>PIN</th><th>WIRE</th></tr><tr><td>1</td><td>WHITE</td></tr><tr><td>2</td><td>BROWN</td></tr><tr><td>3</td><td>GREEN</td></tr><tr><td>4</td><td>YELLOW</td></tr><tr><td>5</td><td>GREY</td></tr><tr><td>6</td><td>PINK</td></tr><tr><td>7</td><td>BLUE</td></tr><tr><td>8</td><td>RED</td></tr></table>	PIN	WIRE	1	WHITE	2	BROWN	3	GREEN	4	YELLOW	5	GREY	6	PINK	7	BLUE	8	RED
PIN	WIRE																																																			
1	BROWN																																																			
3	BLUE																																																			
4	BLACK																																																			
PIN	WIRE																																																			
1	BROWN																																																			
2	WHITE																																																			
3	BLUE																																																			
4	BLACK																																																			
PIN	WIRE																																																			
1	BROWN																																																			
2	WHITE																																																			
3	BLUE																																																			
4	BLACK																																																			
5	GREY OR GREEN/YELLOW																																																			
PIN	WIRE																																																			
1	WHITE																																																			
2	BROWN																																																			
3	GREEN																																																			
4	YELLOW																																																			
5	GREY																																																			
6	PINK																																																			
7	BLUE																																																			
8	RED																																																			

FOR OPTION SEE - NUMERICAL CODE - ON SHEET 2

6	1	LABEL	VINYL	YELLOW
5	3/4/5	CONTACT MA	COPPER	GOLD OVER Ni-PLATED
	8	CONTACT MA	BRASS	GOLD OVER Ni-PLATED
4	1	INSERT M12 MA XP	PUR	BLACK
3	1	COUPLING NUT M12 MA	SEE SHEET 2	SEE SHEET 2
2	-	OVERMOULDING	TPU	SEE SHEET 2
1	-	CABLE	SEE SHEET 2	-
ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION													
	DIMENSION UNITS		SCALE		CURRENT REV DESC: CHANGED DIMENSIONING STYLE OF OVERALL LENGTH TO END TO END, UPDATED INSERT TO OVERMOLD DIM. AND NOTES			molex						
	mm		1:1											
	GENERAL TOLERANCES (UNLESS SPECIFIED)													
DIVISIONAL SYMBOLS	ANGULAR TOL		± 1.0 °		EC NO: 789428 DRWN: FDAFERNER 2023/01/31 CHK'D: RSILLER 2024/07/02 APPR: RSILLER 2024/07/02			CSE M12 XP AC MA STR WSOR XM SE UNSH						
	4 PLACES		±											
	3 PLACES		±											
	2 PLACES		± 0.05											
	1 PLACE		± 0.3											
	0 PLACES		± 0.5											
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	THIRD ANGLE PROJECTION				DRAWING		SERIES		MATERIAL NUMBER		CUSTOMER		SHEET NUMBER	
					A3-SIZE		120065		SEE SHEET 3		GENERAL MARKET		1 OF 3	

	10	9	8	7	6	5	4	3	2	1		
	PART LIST											
F	MOLEX P/N	ENGINEERING No.	LENGTH [mm]	MOLEX P/N	ENGINEERING No.	LENGTH [mm]	MOLEX P/N	ENGINEERING No.	LENGTH [mm]	MOLEX P/N	ENGINEERING No.	LENGTH [mm]
	3P CABLE B30			4P CABLE B33			8P CABLE B41			5P CABLE B55		
	1200652271	803006B30M010	1000	1200656489	804006B33M003A	300	1200659680	808006B41M003	300	1200656680	805006B55M010Y	1000
	1200652272	803006B30M020	2000	1200656521	804006B33M005A	500	1200652302	808006B41M010	1000	1200656681	805006B55M020Y	2000
	1200652273	803006B30M050	5000	1200656487	804006B33M010A	1000	1200652383	808006B41M010R	1000	1200656682	805006B55M030Y	3000
E	1200652274	803006B30M100	10000	1200659451	804006B33M020	2000	1200659453	808006B41M020	2000	1200659945	805006B55M050Y	5000
	4P CABLE B30			1200659596	804006B33M020A	2000	1200652384	808006B41M020R	2000	1200659946	805006B55M100Y	10000
	1200656066	804006B30M005	500	1200656522	804006B33M030A	3000	1200659776	808006B41M030	3000	1200659947	805006B55M150Y	15000
	1200652275	804006B30M010	1000	1200659597	804006B33M050A	5000	1200652385	808006B41M030R	3000			
	1200652378	804006B30M010R	1000	1200657152	804006B33M070A	7000	1200656003	808006B41M040	4000			
D	1200652276	804006B30M020	2000	1200656488	804006B33M100A	10000	1200652386	808006B41M040R	4000			
	1200652379	804006B30M020R	2000	1200656614	804006B33M150A	15000	1200652304	808006B41M050	5000			
	1200656001	804006B30M030	3000	1200657156	804006B33M200A	20000	1200652387	808006B41M050R	5000			
	1200652380	804006B30M030R	3000	1200657154	804006B33M300A	30000	1200652305	808006B41M100	10000			
	1200659638	804006B30M030R	3000	5P CABLE B33			5P CABLE B42					
C	1200656002	804006B30M040	4000	1200657186	805006B33M005A	500	1200652279	805006B42M010	1000			
	1200652381	804006B30M040R	4000	1200656673	805006B33M010A	1000	1200652280	805006B42M020	2000			
	1200652277	804006B30M050	5000	1200659452	805006B33M020	2000	1200652281	805006B42M050	5000			
	1200652382	804006B30M050R	5000	1200656674	805006B33M020A	2000	1200652282	805006B42M100	10000			
	1200656296	804006B30M080	8000	1200656675	805006B33M030A	3000	1200659546	805006B42M200	20000			
B	1200652278	804006B30M100	10000	1200656676	805006B33M050A	5000	1200659547	805006B42M300	30000			
	1200659440	804006B30M150	15000	1200656677	805006B33M100A	10000	4P CABLE B55					
	1200657234	804006B30M200	20000	1200656678	805006B33M150A	15000	1200656634	804006B55M010Y	1000			
	5P CABLE B30			1200657187	805006B33M200A	20000	1200656635	804006B55M020Y	2000			
	1200659964											