


FEMALE PLUG M12 STRAIGHT TO MALE PLUG M12 STRAIGHT

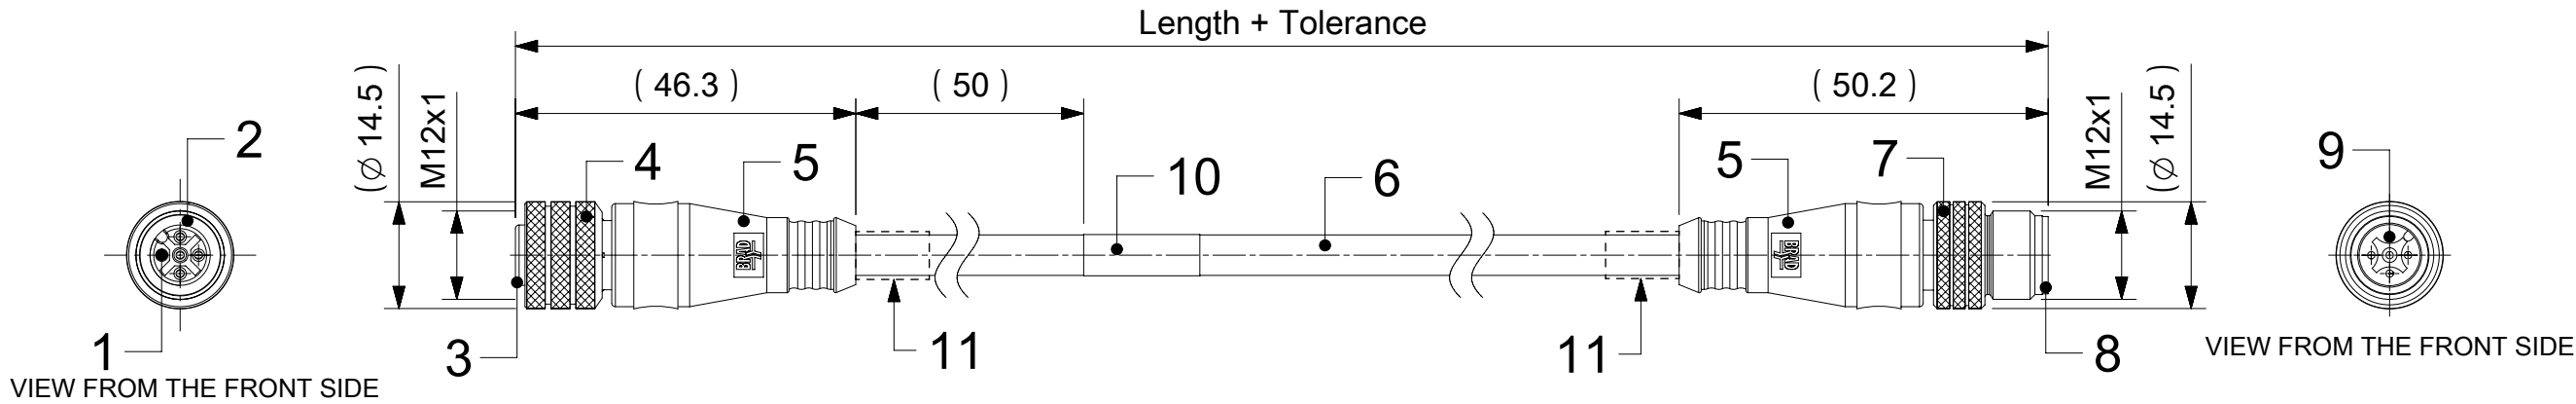

NOTES:

RATED VOLTAGE: 3, 4 contacts 250V per IEC 60664
5 contacts 60V per IEC 60664
5 contacts 250V per UL 2238
8 contacts 30V per IEC 60664

RATED CURRENT: 3, 4, 5 contacts 4A
8 contacts 2A

PROTECTION CLASS: IP 67
TEMPERATURE: -25°C / +85°C

CONTACTS POSITION FRONT VIEW:

	3 CONTACTS		4 CONTACTS		5 CONTACTS		8 CONTACTS	
FEMALE								
MALE								
CONNECTIONS	PIN	WIRE	PIN	WIRE	PIN	WIRE	PIN	WIRE
	1	BROWN	1	BROWN	1	BROWN	1	WHITE
	2	-	2	WHITE	2	WHITE	2	BROWN
	3	BLUE	3	BLUE	3	BLUE	3	GREEN
	4	BLACK	4	BLACK	4	BLACK	4	YELLOW
					5	GREY	5	GREY
							6	PINK
							7	BLUE
CODING REQUIRED TO IEC 61076-2-101								

FOR OPTIONS SEE - NUMERICAL CODE - ON SHEET 2

11	SEE SHEET 2	ID CARRIER	PVC	TRANSPARENT
10	1	LABEL YELLOW	VINYL	-
9	3 / 4 / 5 / 8	CONTACT MALE	SEE PART LIST	SELECTIVE GOLD OVER NICKEL
8	1	INSERT MALE BLACK	TPU	-
7	1	COUPLING NUT MALE	-	-
6	-	CABLE	SEE SHEET 2	-
5	-	OVERMOULDING BLACK	TPU	-
4	1	COUPLING NUT FEMALE	-	-
3	1	INSERT FEMALE BLACK	PUR	-
2	1	O-RING RED	FPM	-
1	3 / 4 / 5 / 8	CONTACT FEMALE	SEE PART LIST	SELECTIVE GOLD OVER NICKEL
ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH

FUNCTIONAL SYMBOLS THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION CURRENT REV DESC: NEW P/N'S ADDED TO THE DRAWING 12335	DIVISIONAL SYMBOLS THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION CURRENT REV DESC: NEW P/N'S ADDED TO THE DRAWING 12335	SCALE 1:1	molex CSE M12 XP AC FE STR MA STR XM DE		
			PRODUCT CUSTOMER DRAWING		
			DOCUMENT NUMBER 1200668084		
			DOC TYPE PSD		
	INITIAL REVISION: DRWN: JMARSZALEK APPR: RSILLER	THIRD ANGLE PROJECTION	DRAWING A3-SIZE	SERIES 120066	MATERIAL NUMBER SEE SHEET 3-4
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	CUSTOMER GENERAL MARKET	SHEET NUMBER 1 OF 4	REVISION A17

ENGINEERING NO. - NUMERICAL CODE (Available parts see PART LIST table. Other parts available upon request).

OPTIONS

COUPLING NUTS
FEMALE MALE

8	8	X	0	3	0	X	X	X	X	X	X	X	X
---	---	---	---	---	---	---	---	---	---	---	---	---	---

88=Micro-Change
M12x1
Double ended

Contacts:
3=3 Contacts
4=4 Contacts
5=5 Contacts
8=8 Contacts

Heads style:
030=Plug Female Straight
to Plug Male Straight

Cable type: See Table







Units:
M=Meter
C=Centimeter

Length
Examples:
005=0.5 unit
010=1 unit
100=10 units

Overmold color:
Blank (Standard)=Black
A=Grey / G=Black / Y=Yellow

Coupling Nut:
Blank (Standard) & 3=Knurled Brass Ni Plated
1=Hexagonal Stainless steel _____
5=Knurled Derlin _____
7=Knurled Brass Ni Plated, Teflon Coated _____
8=Type 316 stainless steel _____
9=Knurled / Hexagonal Brass Ni Plated SW13

H= 2 pcs. of I/D Carrier PVC Transparent



CABLE INFORMATION (for more information see Cable Data Sheet).

CABLE TYPE	NO. OF WIRES	CROSS SECTION	CABLE JACKET	UL	CSA	STATIC: TEMP. / BENDING RADIUS	DYNAMIC: TEMP. / BENDING RADIUS	DRAG CHAIN	SHIELD
E02	3 / 4 / 5 / 8	0.25mm²	PVC BLACK	UL 2464/1729	C22.2 I/II A/B 80°C/300V	-30°C to +80°C, 10xO.D.	-10°C to +80°C, 15xO.D.	-	-
E03	3 / 4 / 5	0.34mm²	PVC BLACK	UL 2464/1729	C22.2 I/II A/B 80°C/300V	-30°C to +80°C, 10xO.D.	-10°C to +80°C, 15xO.D.	-	-
H08	3 / 4 / 5 / 8	0.25mm²	PUR BLACK LS0H	UL 21198/10493	C22.2 I/II A/B 80°C/300V	-40°C to +80°C, 5xO.D.	-25°C to +80°C, 10xO.D.	2 000 000 cycles at 20°C, Temp. range +5°C to +60°C	-
H09	3 / 4 / 5	0.34mm²	PUR BLACK LS0H	UL 21198/10493	C22.2 I/II A/B 80°C/300V	-40°C to +80°C, 5xO.D.	-25°C to +80°C, 10xO.D.	2 000 000 cycles at 20°C, Temp. range +5°C to +60°C	-
P02	3 / 4 / 5 / 8	0.25mm²	PUR / PVC BLACK	-	-	-30°C to +80°C, 7xO.D.	-5°C to +80°C, 15xO.D.	-	-
P03	3 / 4 / 5	0.34mm²	PUR / PVC BLACK	-	-	-30°C to +80°C, 7xO.D.	-5°C to +80°C, 15xO.D.	-	-

CABLE LENGTH TOLERANCES		
OVER [mm]	UP TO AND INCLUDING [mm]	TOLERANCES [mm]
0	305	+19
305	915	+45
915	1830	+56
1830	3660	+89
3660	7320	+165
7320	14640	+317
14640	30500	+610
30500	>	+2% OF FINISHED LENGTH

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION										
	DIMENSION UNITS		SCALE		CURRENT REV DESC: NEW P/N'S ADDED TO THE DRAWING 12335		molex				
	mm		1:1								
	GENERAL TOLERANCES (UNLESS SPECIFIED)						CSE M12 XP AC FE STR MA STR XM DE				
ANGULAR TOL ± 1.0 °											
DIVISIONAL SYMBOLS	4 PLACES		±		EC NO: 769491 DRWN: VHANDI 2023/10/30 CHK'D: RSILLER 2023/11/21 APPR: RSILLER 2023/11/21		PRODUCT CUSTOMER DRAWING				
	3 PLACES		±								
	2 PLACES		± 0.05								
	1 PLACE		± 0.3		INITIAL REVISION: DRWN: JMARSZALEK 2016/09/16 APPR: RSILLER 2016/12/08		DOCUMENT NUMBER		DOC TYPE	DOC PART	REVISION
	0 PLACES		± 0.5				1200668084		PSD	000	A17
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION		DRAWING	SERIES	MATERIAL NUMBER		CUSTOMER
						A3-SIZE	120066	SEE SHEET 3-4		GENERAL MARKET	2 OF 4

DOCUMENT STATUS	P1	RELEASE DATE	2023/11/21	12:03:28
-----------------	----	--------------	------------	----------

	10	9	8	7	6	5	4	3	2	1	
	PART LIST										
F	MOLEX PN			Engineering No.			Length				F
	1200668174			884030H09M030			3m				
	1200668380			884030H09M040			4m				
	1200668244			884030H09M050			5m				
	1200668550			884030H09M050H			5m				
	1200668737			884030H09M055			5.5m				
	1200669926			884030H09M065H			6.5m				
	1200669927			884030H09M070H			7m				
	1200669931			884030H09M075H			7.5m				
E	1200669932			884030H09M080H			8m				E
	1200668381			884030H09M100			10m				
	5P CABLE H09										
	1200668509			885030H09M006			0.6m				
	1200668497			885030H09M010			1m				
	1200669756			885030H09M015H			1.5m				
	1200668500			885030H09M020			2m				
	1200669762			885030H09M020H			2m				
	1200669757			885030H09M025H			2.5m				
D	1200668510			885030H09M030			3m				D
	1200669763			885030H09M030H			3m				
	1200668853			885030H09M040			4m				
	1200668501			885030H09M050			5m				
	1200668854			885030H09M060			6m				
	1200668502			885030H09M092			9.2m				
	1200668511			885030H09M100			10m				
	1200668683			885030H09M150			15m				
	1200668684			885030H09M200			20m				
C	8P CABLE P02										C
	1200661455			888030P02M005			0				

	10	9	8	7	6	5	4	3	2	1	
	PART LIST										
F	MOLEX PN			Engineering No.			Length				F
	1200668174			884030H09M030			3m				
	1200668380			884030H09M040			4m				
	1200668244			884030H09M050			5m				
	1200668550			884030H09M050H			5m				
	1200668737			884030H09M055			5.5m				
	1200669926			884030H09M065H			6.5m				
	1200669927			884030H09M070H			7m				
	1200669931			884030H09M075H			7.5m				
E	1200669932			884030H09M080H			8m				E
	1200668381			884030H09M100			10m				
	5P CABLE H09										
	1200668509			885030H09M006			0.6m				
	1200668497			885030H09M010			1m				
	1200669756			885030H09M015H			1.5m				
	1200668500			885030H09M020			2m				
	1200669762			885030H09M020H			2m				
	1200669757			885030H09M025H			2.5m				
D	1200668510			885030H09M030			3m				D
	1200669763			885030H09M030H			3m				
	1200668853			885030H09M040			4m				
	1200668501			885030H09M050			5m				
	1200668854			885030H09M060			6m				
	1200668502			885030H09M092			9.2m				
	1200668511			885030H09M100			10m				
	1200668683			885030H09M150			15m				
	1200668684			885030H09M200			20m				
C	8P CABLE P02										C
	1200661455			888030P02M005			0				

	10	9	8	7	6	5	4	3	2	1	
	PART LIST										
F	MOLEX PN			Engineering No.			Length				F
	1200668174			884030H09M030			3m				
	1200668380			884030H09M040			4m				
	1200668244			884030H09M050			5m				
	1200668550			884030H09M050H			5m				
	1200668737			884030H09M055			5.5m				
	1200669926			884030H09M065H			6.5m				
	1200669927			884030H09M070H			7m				
	1200669931			884030H09M075H			7.5m				
E	1200669932			884030H09M080H			8m				E
	1200668381			884030H09M100			10m				
	5P CABLE H09										
	1200668509			885030H09M006			0.6m				
	1200668497			885030H09M010			1m				
	1200669756			885030H09M015H			1.5m				
	1200668500			885030H09M020			2m				
	1200669762			885030H09M020H			2m				
	1200669757			885030H09M025H			2.5m				
D	1200668510			885030H09M030			3m				D
	1200669763			885030H09M030H			3m				
	1200668853			885030H09M040			4m				
	1200668501			885030H09M050			5m				
	1200668854			885030H09M060			6m				
	1200668502			885030H09M092			9.2m				
	1200668511			885030H09M100			10m				
	1200668683			885030H09M150			15m				
	1200668684			885030H09M200			20m				
C	8P CABLE P02										C
	1200661455			888030P02M005			0				