
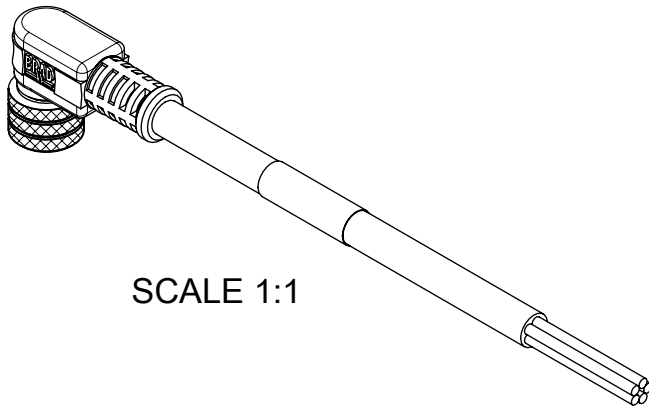
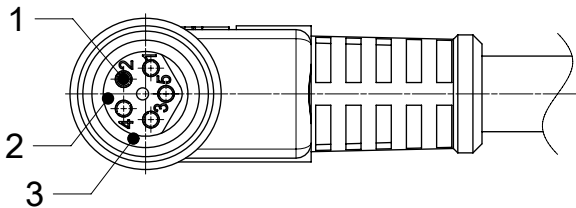
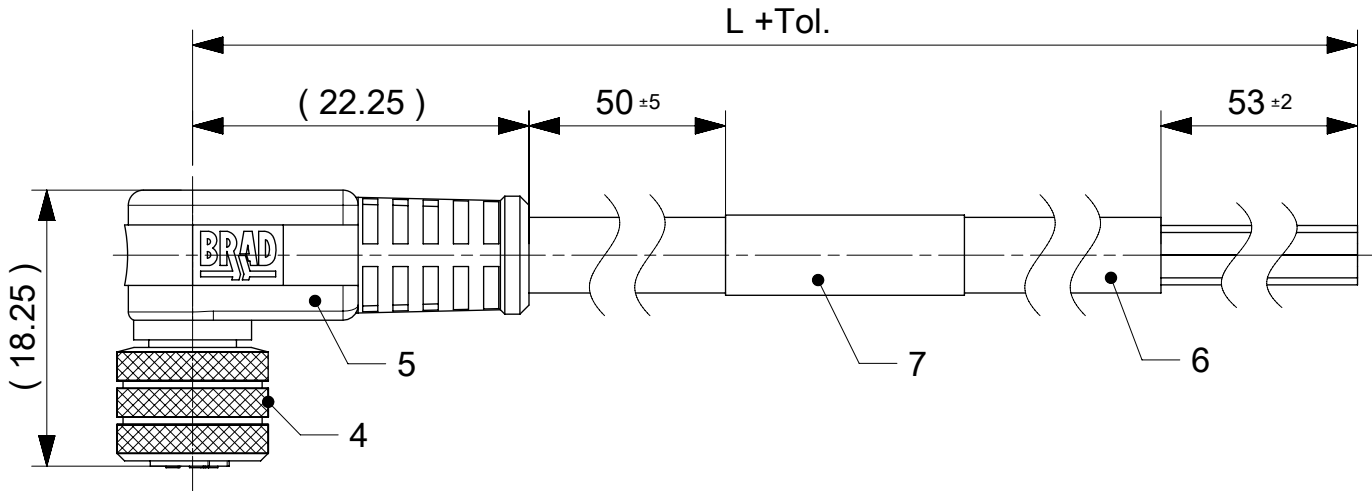


FEMALE PLUG M8 90° ANGLED

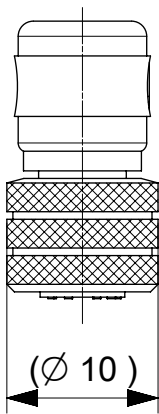

NOTES:
RATED VOLTAGE: 3 contacts 60V AC/DC
4 and 5 contacts 30V AC/DC
CURRENT RATING: 3, 4, 5 contacts 3A
PROTECTION CLASS: IP 67
TEMPERATURE: -25°C / +80°C
PACKAGING ACCORDING TO PACKAGING SPEC. 1201202000

CONTACT POSITION FRONT VIEW:

3 CONTACTS		4 CONTACTS		5 CONTACTS	
PIN	WIRE	PIN	WIRE	PIN	WIRE
1	BROWN	1	BROWN	1	BROWN
2	-	2	WHITE	2	WHITE
3	BLUE	3	BLUE	3	BLUE
4	BLACK	4	BLACK	4	BLACK
				5	GREY
CODING ACCORDING TO IEC 61076-2-104					

FOR OPTIONS SEE - NUMERICAL CODE - ON SHEET 2

7	1	LABEL	VINYL	-
	-	PRINTING FOR CABLES IXX	-	-
6	-	CABLE	SEE SHEET 2	-
5	-	OVERMOULDING BLACK	TPU	-
4	1	NUT M8 FEMALE	BRASS	NICKEL
3	1	O-RING RED	FKM	-
2	1	INSERT FEMALE BLACK	TPU	-
1	3 / 4 / 5	CONTACT M8 FEMALE	BRASS	SELECTIVE Au OVER Ni
ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH

FUNCTIONAL SYMBOLS DIMENSION UNITS SCALE CURRENT REV DESC: PACKAGING SPEC ADDED, NEW P/N'S ADDED EC NO: 770174 DRWN: RSCHIEBER CHK'D: RSILLER APPR: RSILLER INITIAL REVISION: DRWN: FGAIK APPR: RSILLER DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS THIRD ANGLE PROJECTION DRAWING SERIES MATERIAL NUMBER CUSTOMER SHEET NUMBER	0	mm	2:1	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
				GENERAL TOLERANCES (UNLESS SPECIFIED)			
				ANGULAR TOL ± 1.0 °			
				4 PLACES ±			
				3 PLACES ±			
				2 PLACES ± 0.05			
				1 PLACE ± 0.3			
				0 PLACES ± 0.5			
				DOCUMENT NUMBER			
				1200868179			
DIVISIONAL SYMBOLS	0	mm	2:1	CSE M8 XP AC BC RA XM SE			
				PRODUCT CUSTOMER DRAWING			
				DOC TYPE DOC PART REVISION			
				PSD 000 A6			
				MATERIAL NUMBER			
				SEE PART LIST SH 3			
				CUSTOMER			
				GENERAL MARKET			
				SHEET NUMBER			
				1 OF 3			

