
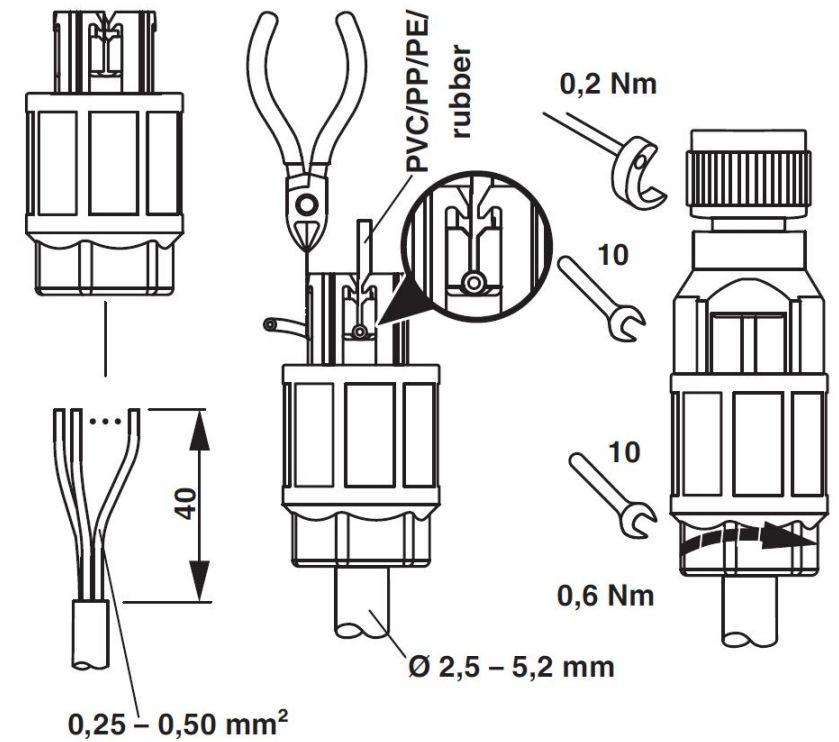


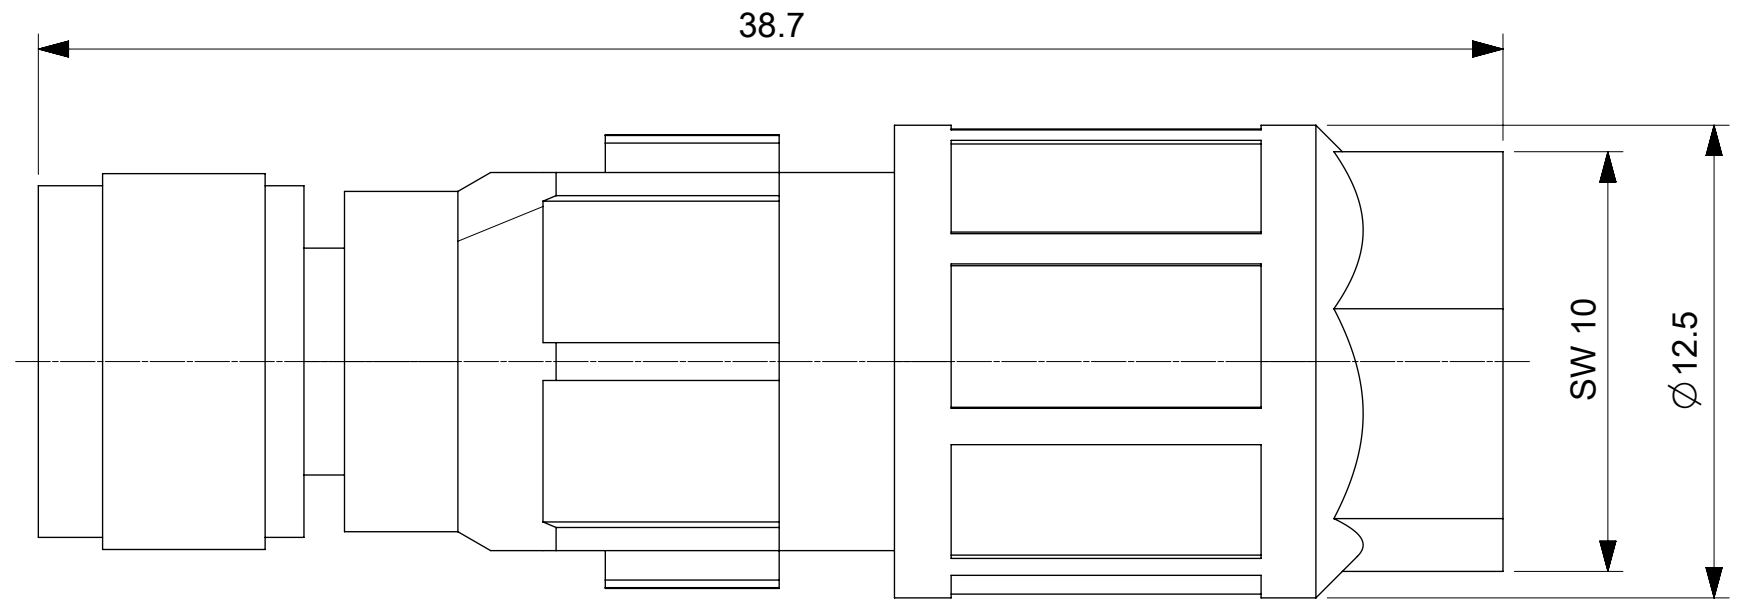

Ambient temperature (operation):	-25 °C ... 80 °C (Plug / socket)
Degree of protection:	IP65
Degree of protection:	IP67
General:	
Rated current at 40°C:	3 A
Rated voltage:	30 V
Number of poles:	4
Connection method:	Insulation displacement connection
Conductor cross section:	0.25 mm ² ... 0.5 mm ²
Wire diameter including insulation:	1.1 mm ... 1.55 mm
Cable outlet:	2.5 mm ... 5 mm ±0.2 mm

Contact material: CuSn
Contact surface material: Ni/Au
Packaging according to packaging spec. 1201202000

ENG.-No.: N04FA03144

DOCUMENT STATUS	P1	RELEASE DATE	2023/11/30	13:30:27
-----------------	----	--------------	------------	----------