

1. ELECTRICAL DATA:
VOLTAGE RATING: 125V
CURRENT RATING: 1.5A
INSULATION RESISTANCE: $10^8 \Omega$ MIN.
MATING CYCLES: MIN. 100
TEMP RANGE: -25°C TO +75°C
PROTECTION: IP67 (WHEN MATED)
UL FILE: E200650
2. ALL DIMS ARE FOR REFERENCE UNLESS TOLERANCED OR NOTED OTHERWISE

M12 (4 PIN) TO RJ45 STRAIGHT THRU WIRING




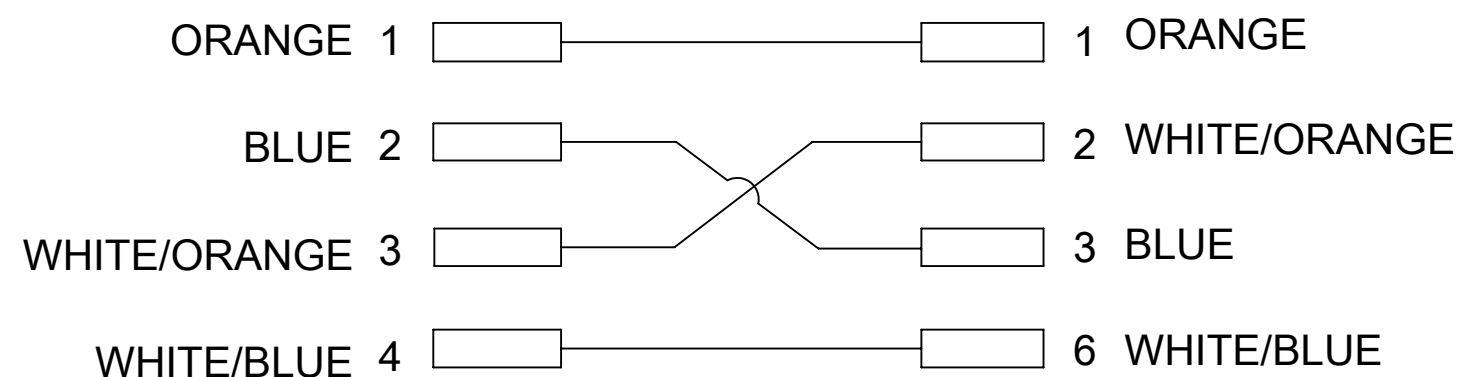


TABLE OF LENGTH TOLERANCES		
OVER	UP TO AND INCLUDING	TOLERANCE
0	305	+19
305	915	+45
915	1830	+56
1830	3660	+89
3660	7320	+165
7320	14640	+317
14640	30500	+610
30500	>	+2% OF LENGTH

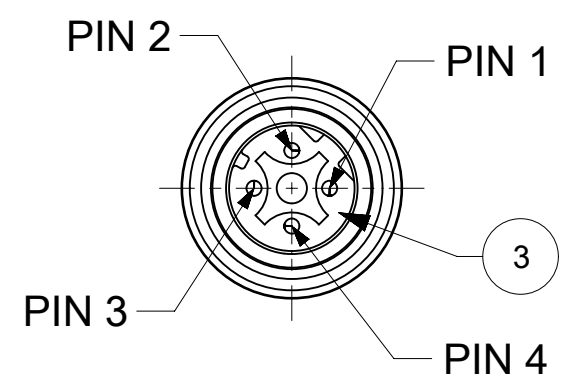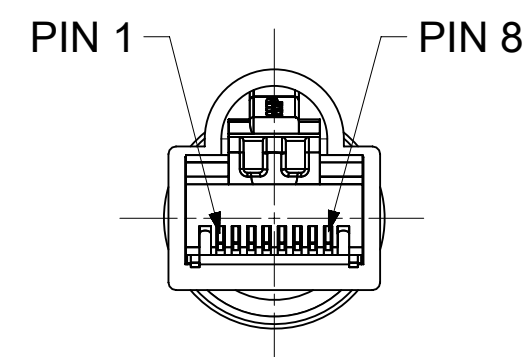

VIEW FROM FRONT SIDE
M12 4 POLE MALE

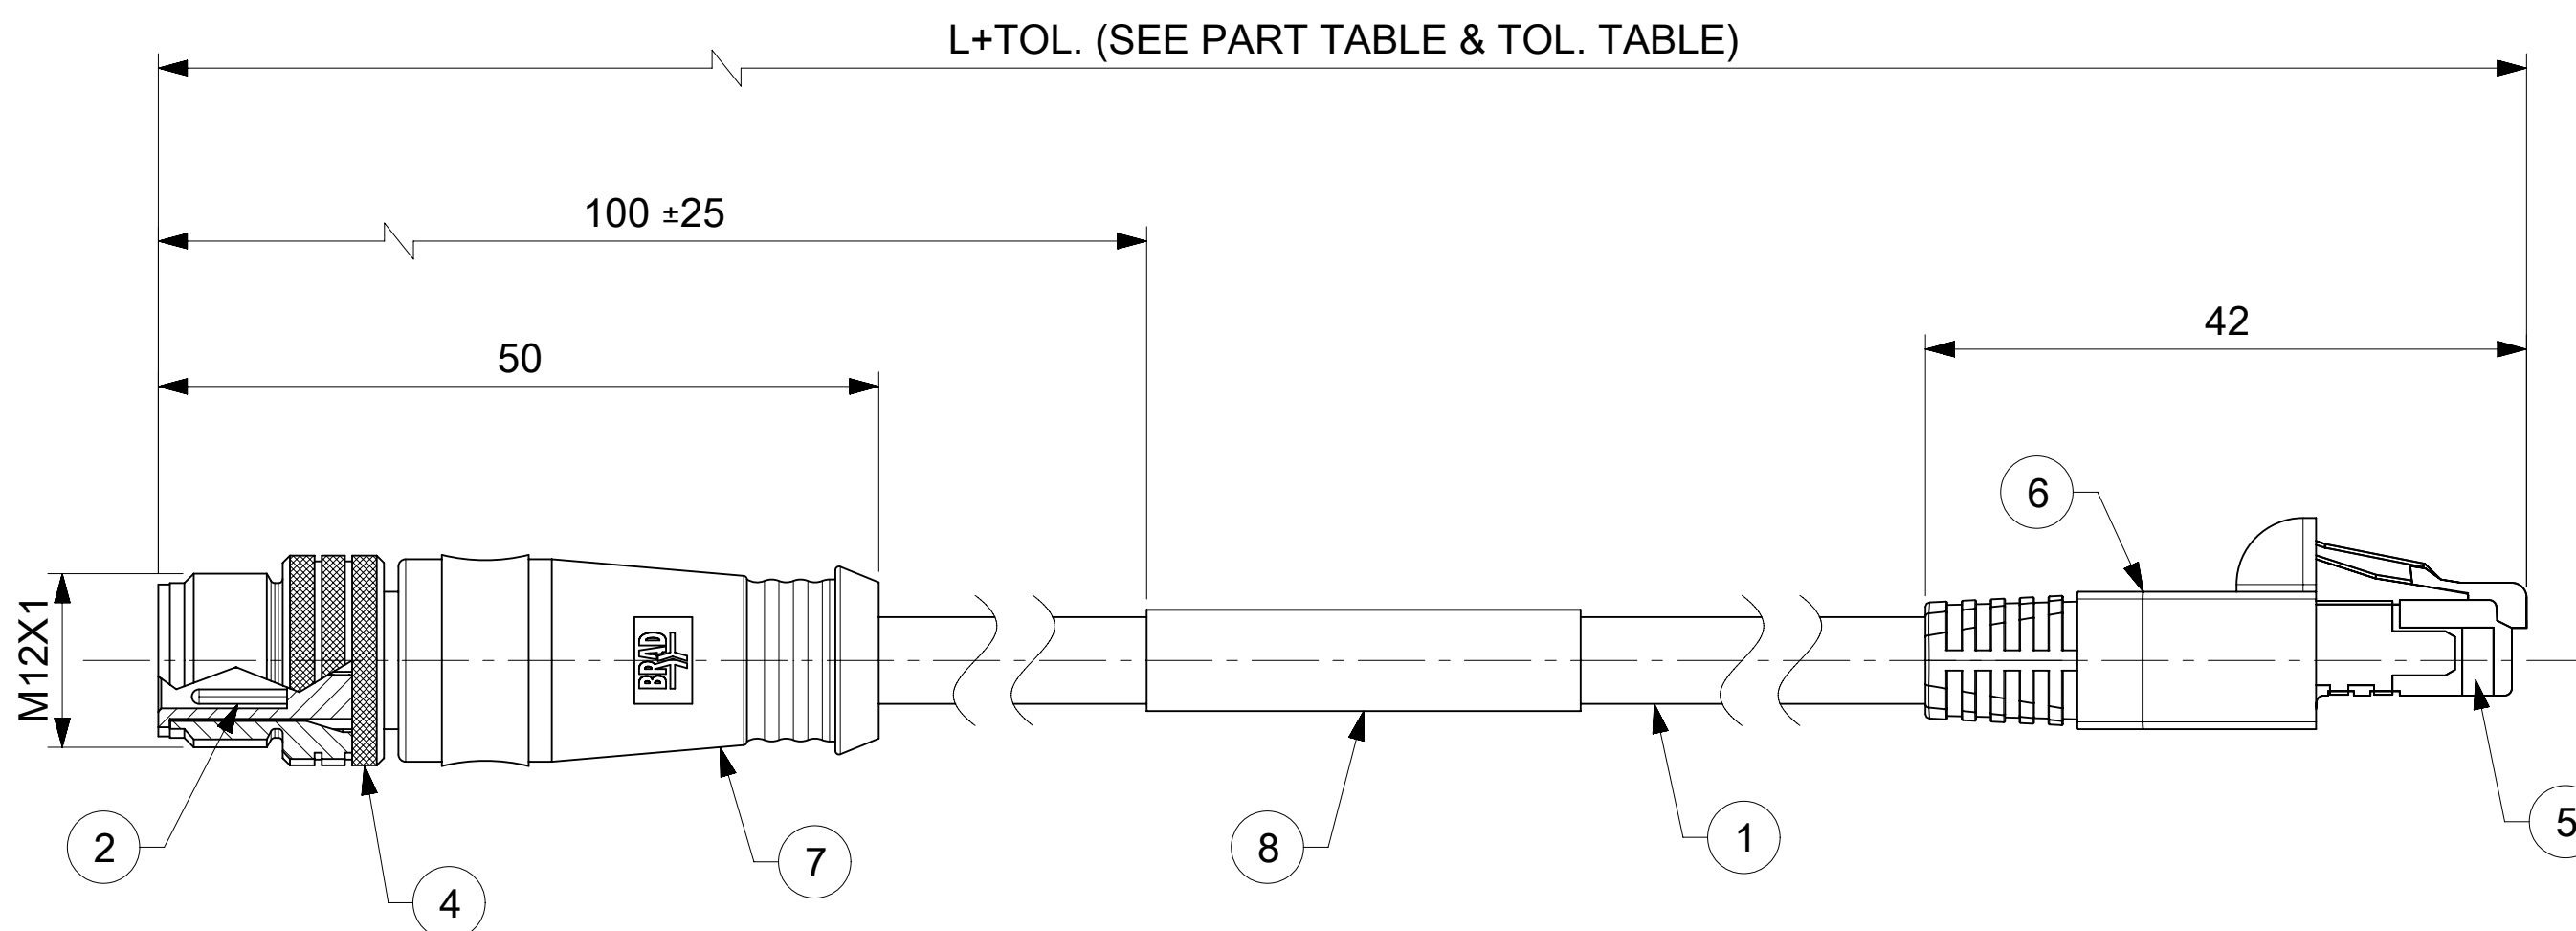

VIEW FROM FRONT SIDE
RJ45 MALE

ITEM	DESCRIPTION	MATERIAL	FINISH
1	CABLE, ETHERNET, 24-4	PVC JACKET	TEAL
2	CONTACT PIN	COPPER ALLOY	GOLD PLATED
3	INSERT D-CODE 4 POLE MALE	PUR	BLACK
4	COUPLING NUT M12 MALE	BRASS	NICKEL
5	RJ45 PLUG	POLYCARBONATE	TRANSPARENT
6	RJ45 BOOT, HOODED	PVC	BLACK
7	OVERMOLD	TPU	BLACK
8	LABEL	VINYL	BLACK/WHITE

FUNCTIONAL SYMBOLS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION															
		DIMENSION UNITS		SCALE		CURRENT REV DESC: AS PER THE PCN-514377 REPLACED THE RJ45 BOOT FROM P/N 1302328002 TO P/N 1301980188 IN ASSEMBLY AND UPDATED THE DRAWING				molex							
mm		2:1															
GENERAL TOLERANCES (UNLESS SPECIFIED)				CSE M12 RJ45 4P DC MALE STR PVC XM DE UNSH													
ANGULAR TOL		± °															
		4 PLACES		±		EC NO: 769239				PRODUCT CUSTOMER DRAWING							
3 PLACES		±		DRWN: AKABADI 2023/11/08													
DIVISIONAL SYMBOLS		2 PLACES		±		CHK'D: RSILLER 2023/11/17											
		1 PLACE		±		APPR: RSILLER 2023/11/17											
		0 PLACES		±		INITIAL REVISION:											
						DRWN: VHANDI 2023/04/19											
						APPR: RSILLER 2023/05/24				DOCUMENT NUMBER		DOC TYPE		DOC PART		REVISION	
										1300480015		PSD		000		B	

E	1	6	A	0	6	0	0	2	M	X	X	X	X
---	---	---	---	---	---	---	---	---	---	---	---	---	---

LENGTH EXAMPLES
005=0.5
010=1
150=15

SCALE 1:1

SCALE 1:1

FORMAT: master-tb-prod-A3
REVISION: J1
DATE: 2021/05/01