


EPIC® H-B 32 TBF

Housing design H-B for 2 inserts.

The connector housing ensures a high level of safety thanks to the two levers. Furthermore, it comprises a cable coupler hood and a direct cable entry.

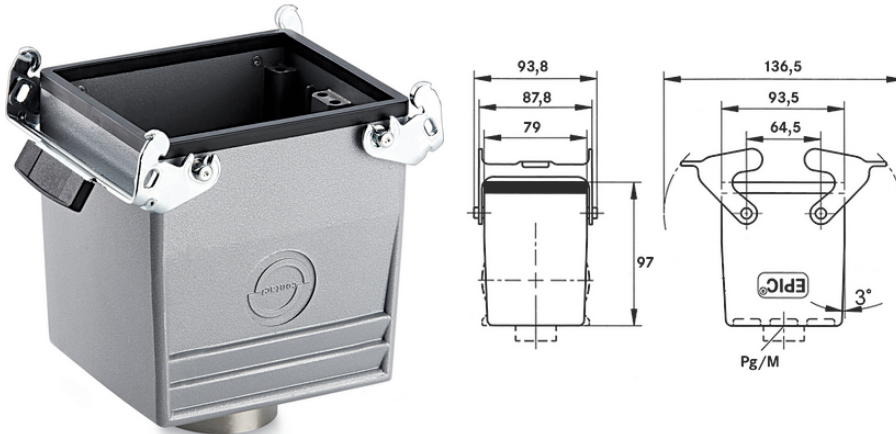

Benefits

Two inserts in one housing. With two levers for high safety

Application range

Plant engineering
Control engineering
Plastics industry

Product features

Cable coupler hood
Dual levers
Straight cable entry
Versions with / without neck

Technical Data

Classification ETIM 5:

ETIM 5.0 Class-ID: EC000437

ETIM 5.0 Class-Description: Housing for industrial connectors

Material:

Housing: powder-coated aluminium alloy, grey

Lever: zinc-plated steel

Sealing: NBR

Protection rating:

IP 65 (latched)

Temperature range:

-40 °C to +100 °C, short-term up to +125 °C

Note

Photographs and graphics are not to scale and do not represent detailed images of the respective products.
Prices are net prices without VAT and surcharges. Sale to business customers only.

Last Update (06.06.2023)

©2023 Lapp Group - Technical changes reserved

Product Management www.lappkabel.de

You can find the current technical data in the corresponding data sheet.

PN 0456 / 02_03.16

EPIC® H-B 32 TBF

Article number	Article description	M	PG	Neck	Pieces / PU
H-B housing: cable coupler hood (straight cable entry, double lever)					
10139500	H-B 32 TBF 29	-	29	yes	5
19139500	H-B 32 TBF M32	32	-	-	5