

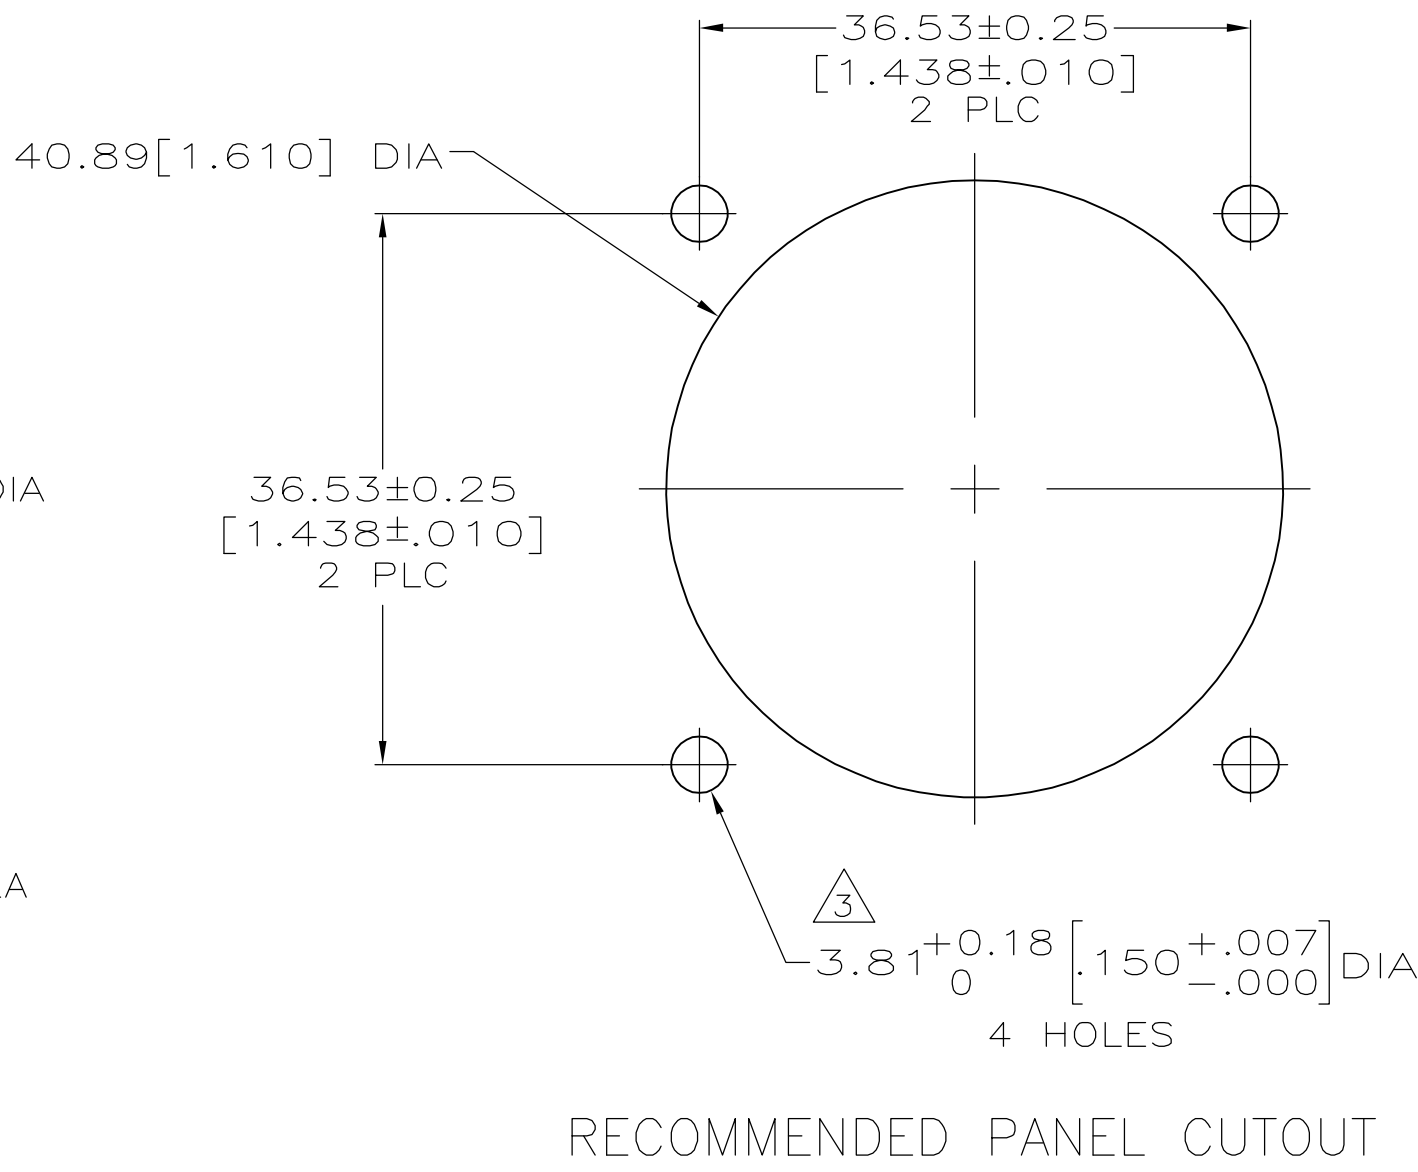
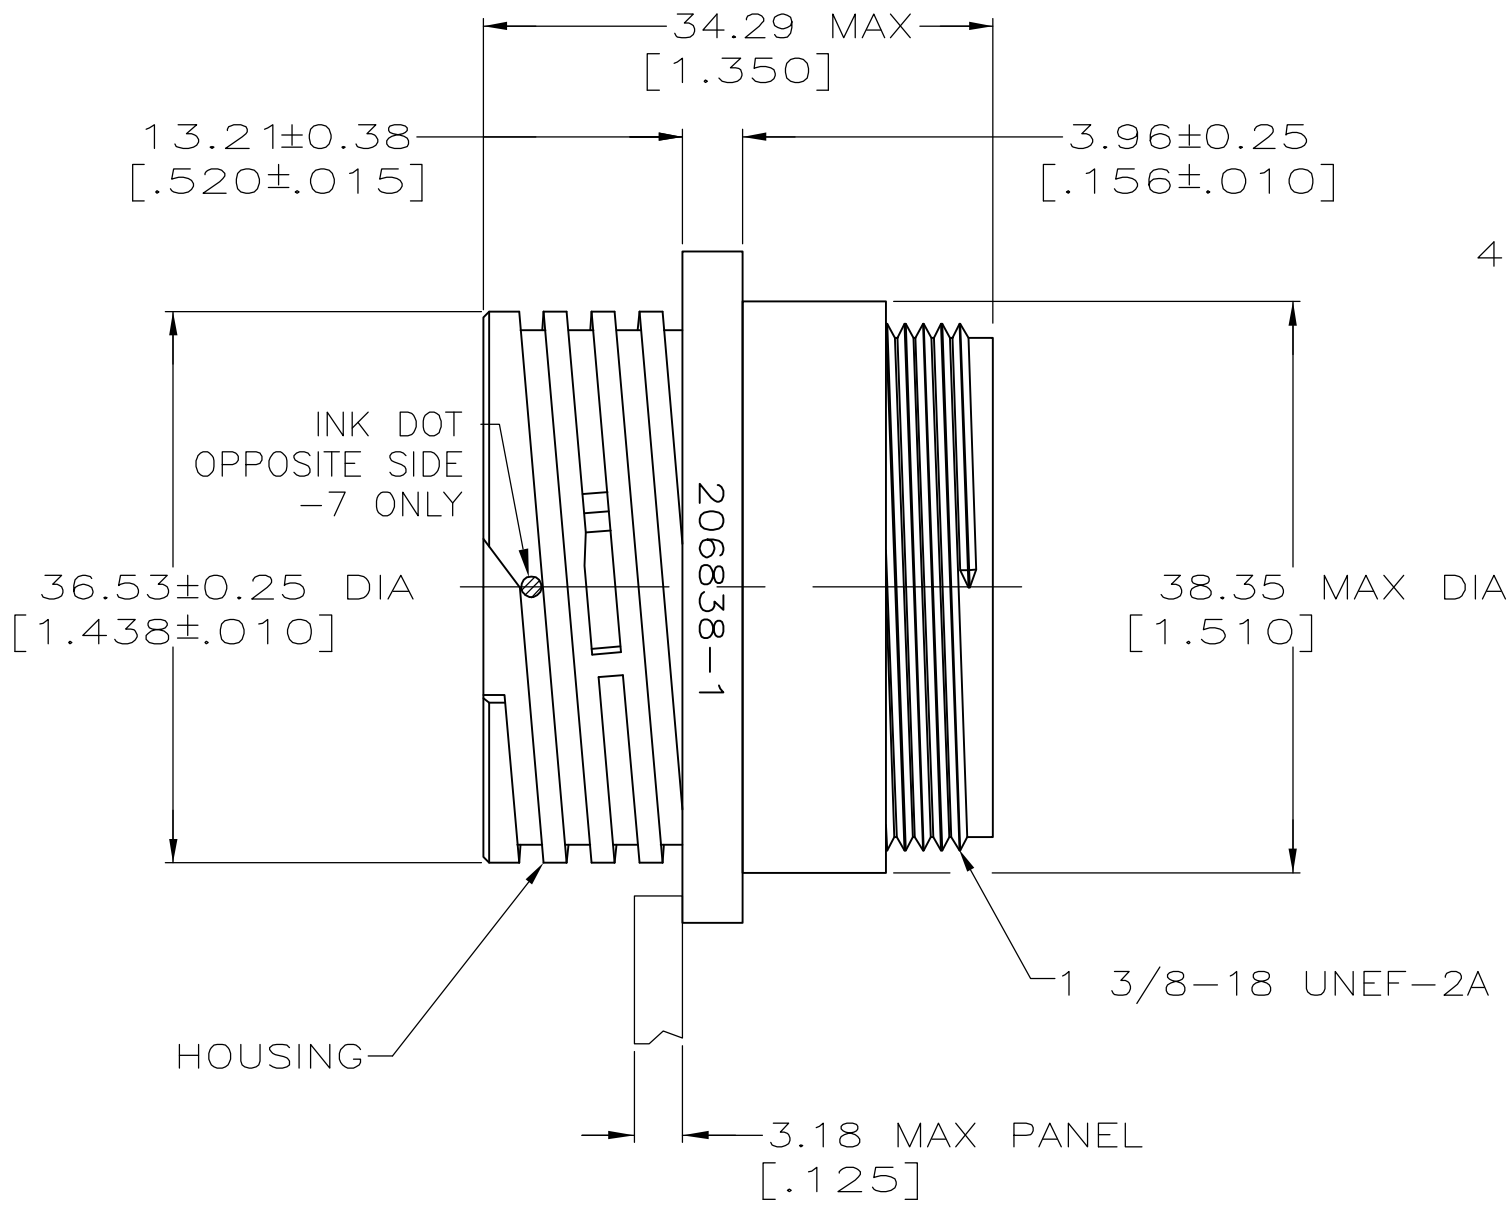
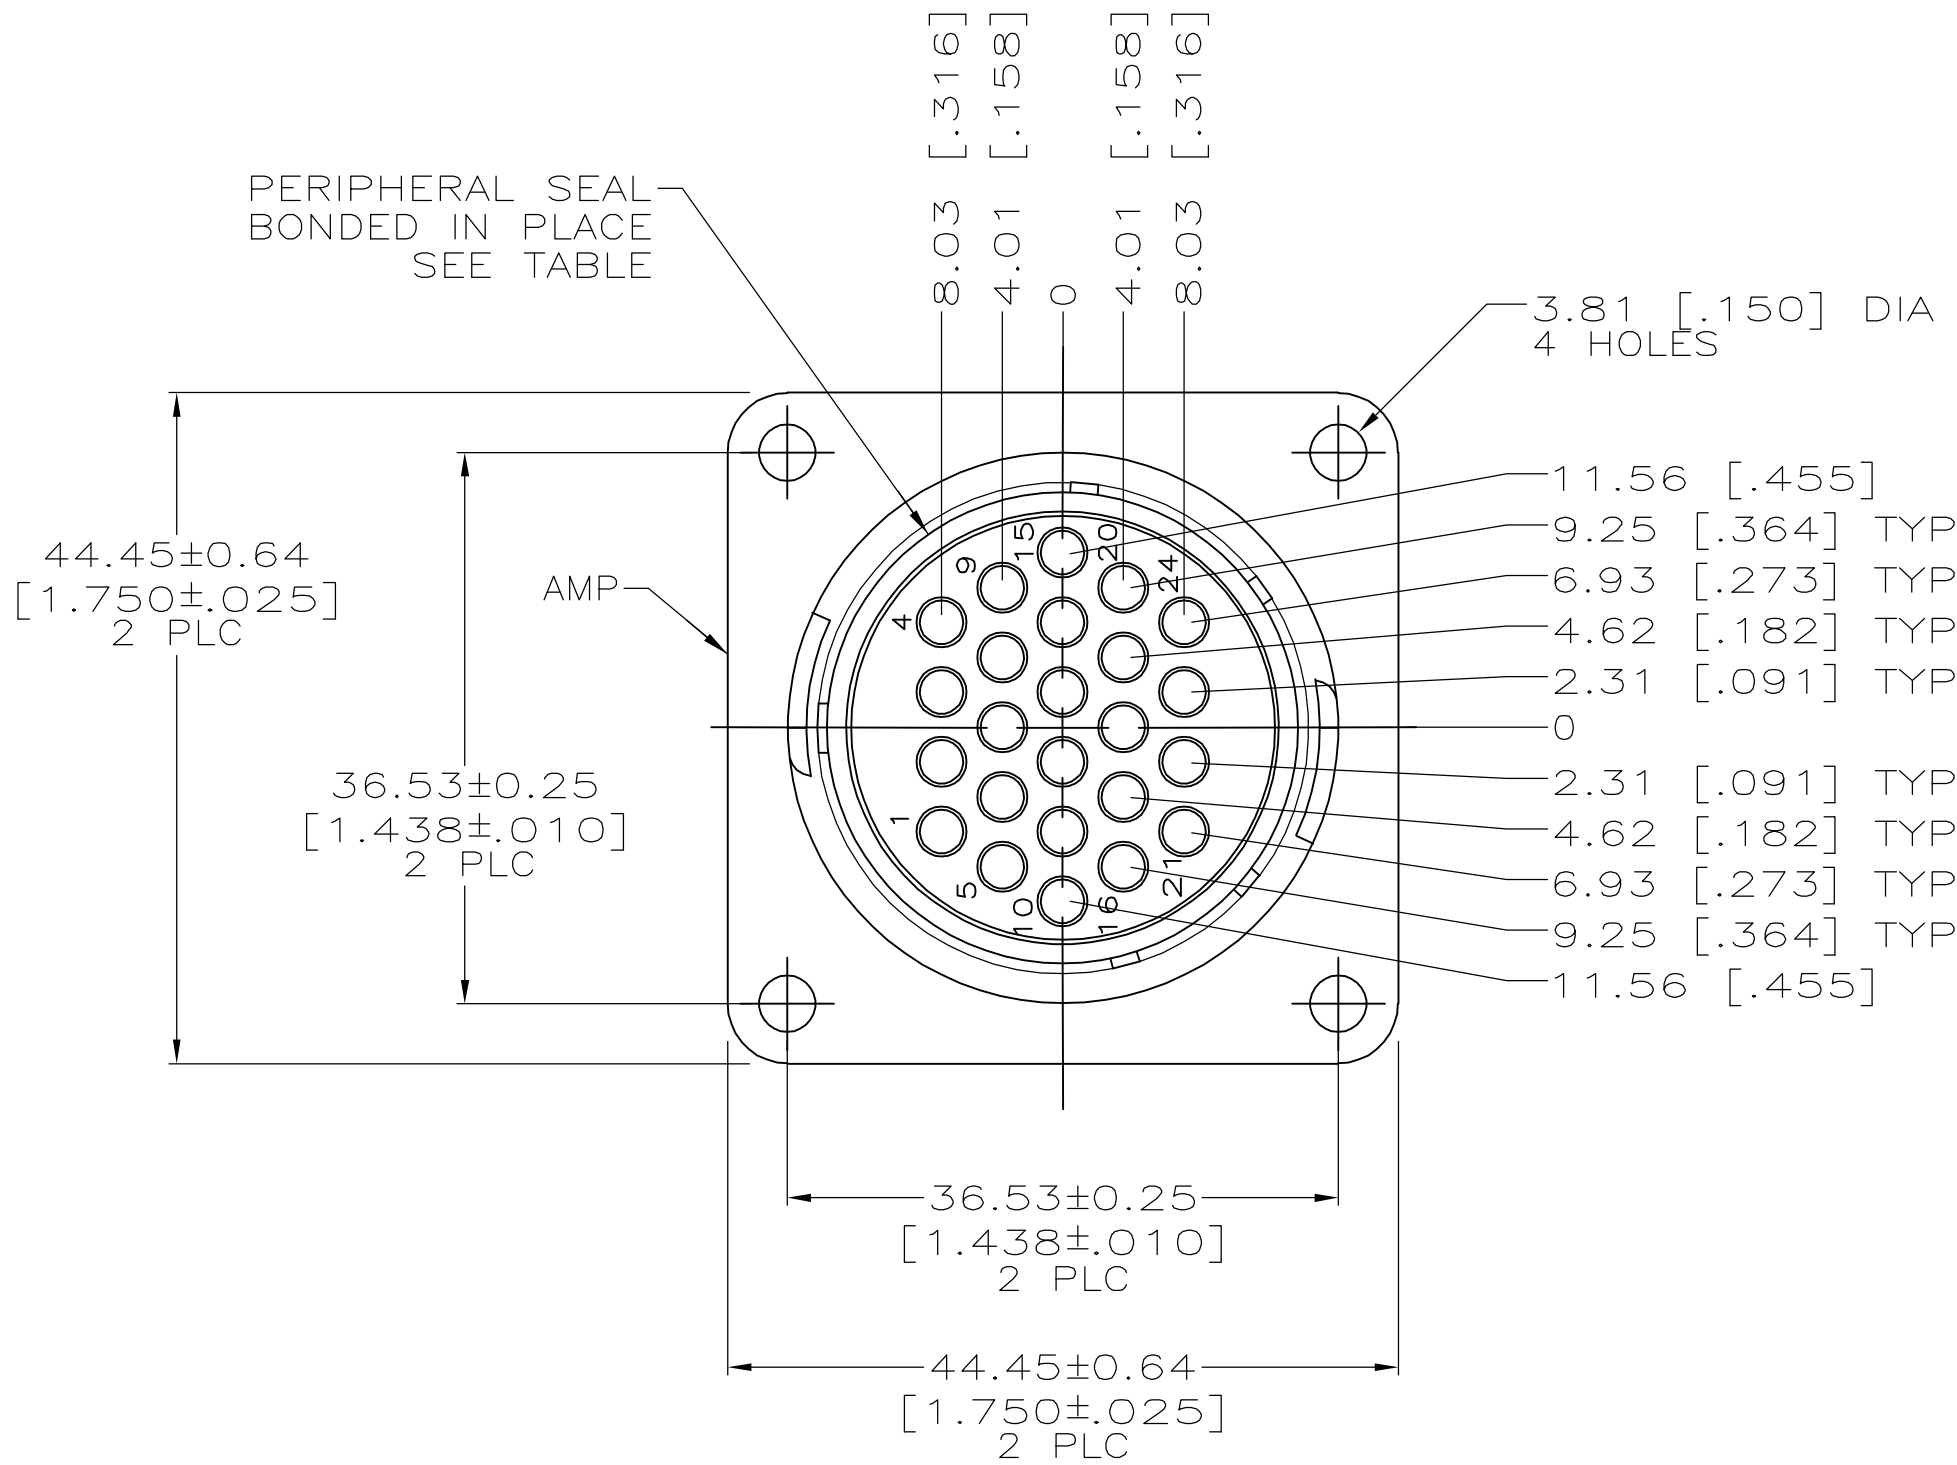


LOC		DIST		REVISIONS						
FT		0		P	LTR	DESCRIPTION		DATE	DWN	APVD
					K1	REVISED PER ECO-06-831		1/12/06	SS	GS

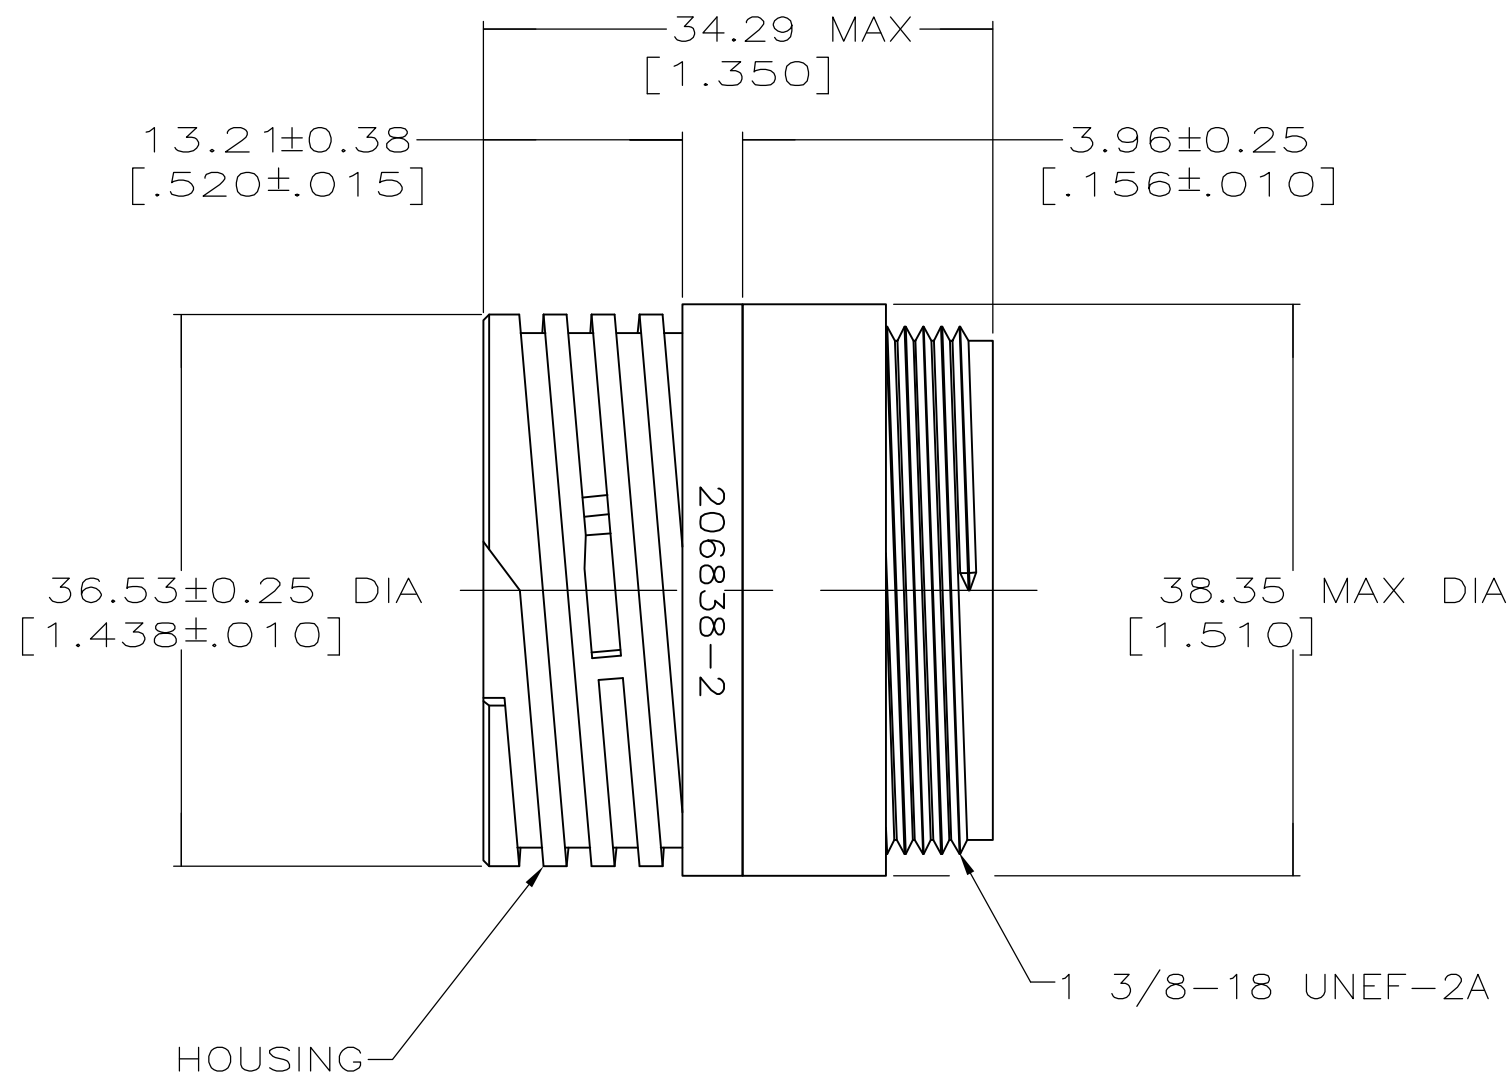

DETAIL A

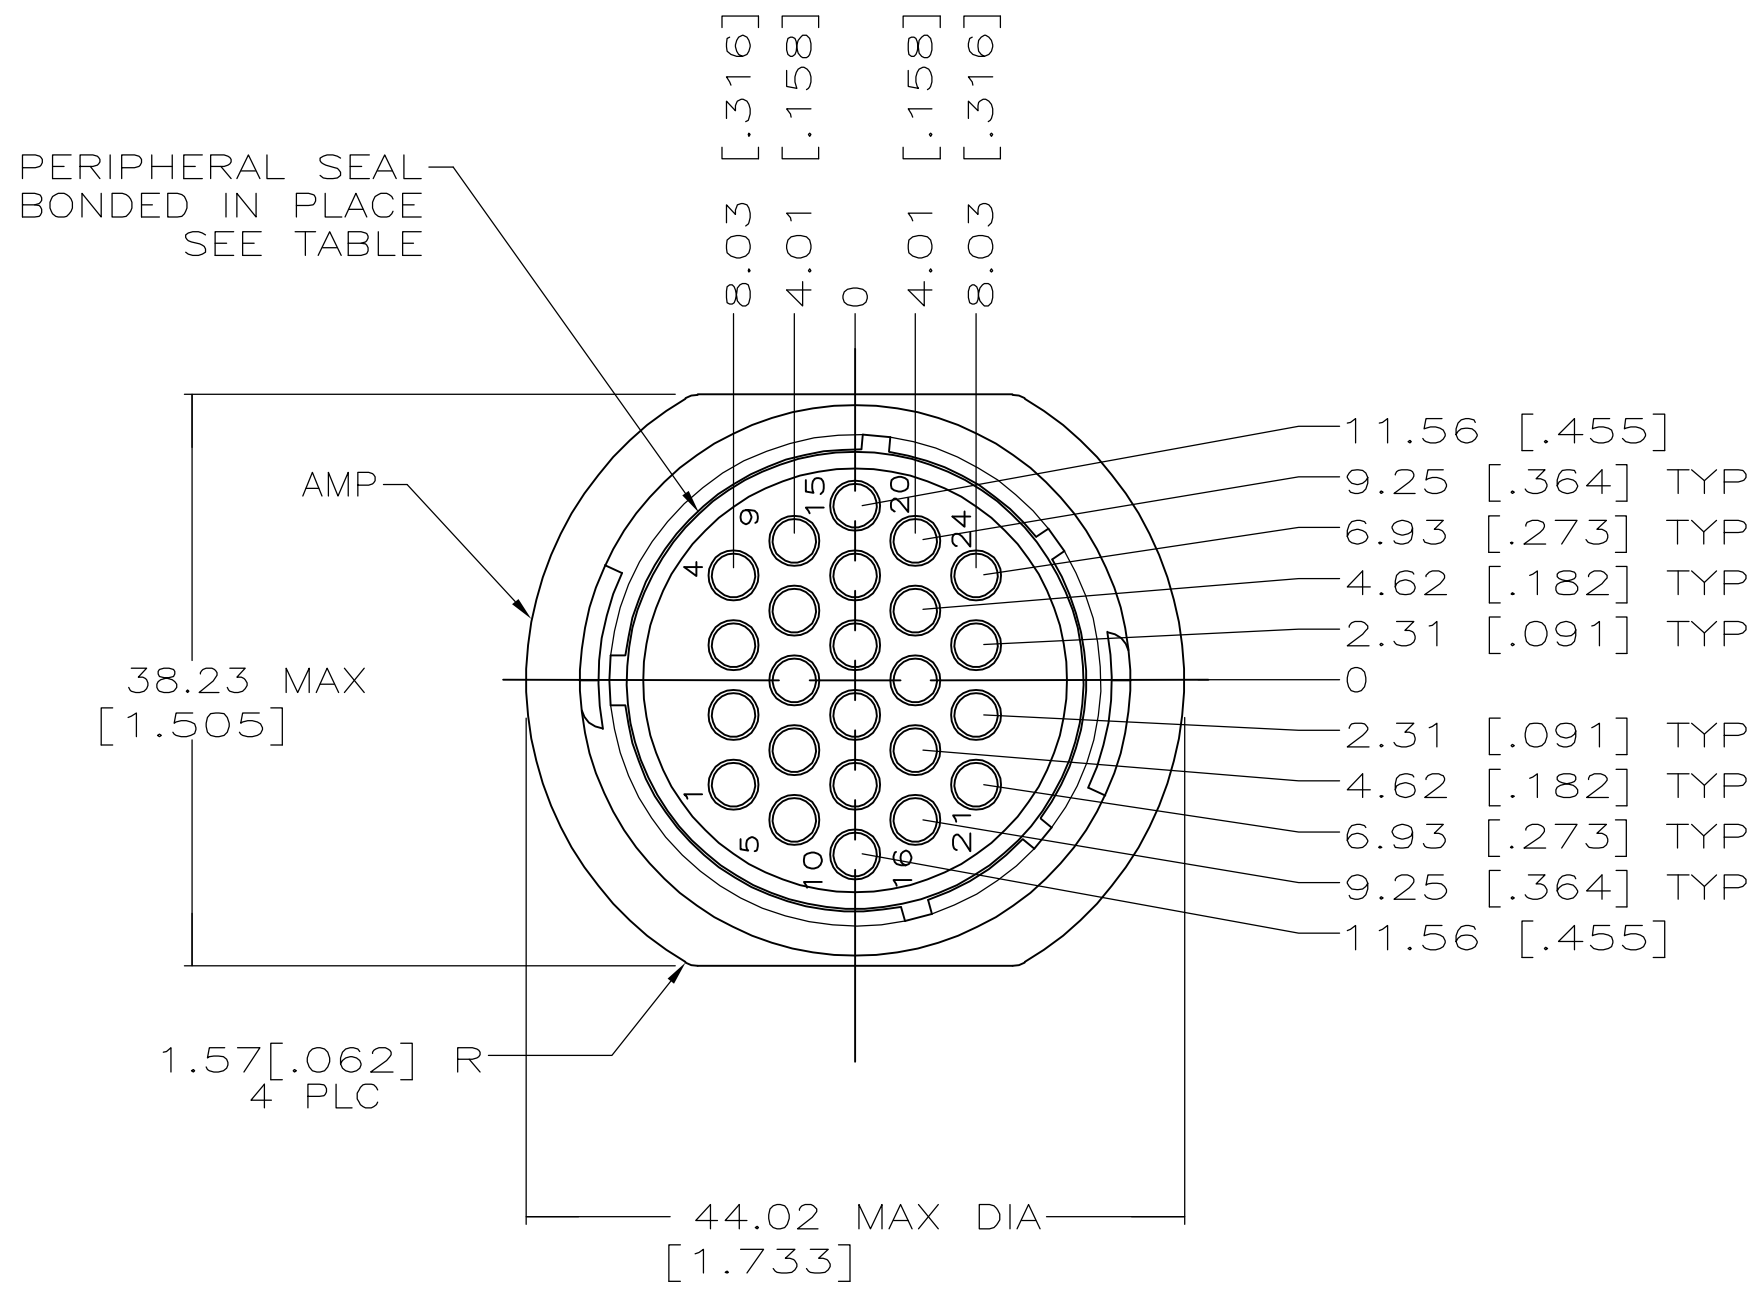

DETAIL B

1. CAVITY IDENTIFICATION ON FRONT AND REAR FACE.
2. WILL ACCEPT (24) MULTIMATE PIN CONTACTS.
3. NO 4 FASTENER RECOMMENDED FOR MOUNTING.
4. MAXIMUM INSULATION NOT TO EXCEED .150 DIA.
5. WHITE DOT NEAR POSITION 1 ON WIRE ENTRY FACE.

STANDARD	YES	A	206838-8
STANDARD	YES	A	206838-7
SMALL PACK	NO	A	206838-5
STANDARD	YES	B	206838-4
STANDARD	YES	A	206838-3
STANDARD	NO	B	206838-2
STANDARD	NO	A	206838-1
PACKAGING	PERIPHERAL SEAL SEE DETAIL	PART NUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D. GELTZ CHK R. STONE APVD -	10/29/92 08/11/93 -	tyco Electronics Tyco Electronics Corporation Harrisburg, PA 17105-3608	
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
		0 PLC ± -		PRODUCT SPEC	
		1 PLC ± -		108-10024	
		2 PLC ± 0.13 [.005]		APPLICATION SPEC	
MATERIAL		FINISH		SIZE CAGE CODE DRAWING NO	
HOUSING: NYLON, BLACK		-		A1 00779 C=206838	
CUSTOMER DRAWING		SCALE		SHEET 1 OF 1	
		2:1		REV K1	