

Wiha bits.

Wiha makes it possible: Perfect technic for professional work.



Drive

													
MaxxTor-Bits		163		163		163			163				
DuraBits	165	165		165		165							
Diamond torsion bits	167	167		167		167							
Torsion bits	169-171	169-172		169-172		169-171						172	
Inkra bits		173		173									
Standard bits	175	175		175		176	176	176	177	178	178		178
Professional-Bits	180	180	180	180	180	181-182	182	182	183	182			
Bits with MagicRing®									177, 183				
Threaded bit		184		184									
Bits for drive system C 4	186-187	186-187				186-187			186-187				
Bits for drive system C 8 5/16"	188	188		188		188			188				
Bits for drive system G 7		188		188									
													
BohrerBits	190	190	191	191	191								

Bits assortment

NEW



MaxxTor family.
Maximum torsion 160 – 161

NEW

Available from
1. September 2012



Individual bits, Wiha drive system C 6.3 and E 6.3
Wiha MaxxTor-Bits.
The 2-component bit. 162 – 163



Wiha DuraBit.
A diamond among bits. 164 – 165



Wiha diamond bit.
Saves strength, time & money. 166 – 167



Wiha Torsion bit.
Patented torsion zone for longer service life. 168 – 172



Wiha Inkra bit.
The specialist for every angle. 173



Wiha Standard bit.
Full programme range in outstanding quality. 174 – 178



Wiha Professional bits.
Wiha Professional Bits - everything but standard. 179 – 183



Wiha threaded bit.
For optimised use in stationary screw systems. 184



Wiha special bits.
Customised for your application. 185



Wiha bits for drive system C 4. 186 – 187



Wiha bits for drive system style C 8 (5/16") and style G 7. 188

Wiha CentroFix system. Quick and professional. 189



Wiha CentroFix.
One for all. 189



Wiha drill bits.
Just keep on working. 190 – 191



Wiha power nut driver product line.
The entire line for hand and machine use. 192 – 195



– **Adapters.** 196



– **Impact screwdriver assortment.** 197



Wiha Gripper. Siezes everything. 198

Wiha bit holder



– **Bit holder for power machines.** 199 – 201



– **Bit holder with handle.** 202



– **Offset screwdriver.** 203



– **Wiha magazine bit holder.** Everything in the palm of your hand. 204 – 207

Bit ranges

NEW

Available from
1. September 2012



Wiha BitBuddy.
Maximum efficiency by direct insert of bits. 208 – 211



Wiha XSelector and XLSelector.
Couldn't be smaller! 212 – 219



Wiha Collector.
Everything in one box. 220 – 221




Wiha bit cassette and bulk packs. 222 – 223


Wiha SB bit programme.
Full programme range in outstanding quality. 224 – 229

Wiha MaxxTor Family

Maximum torsion

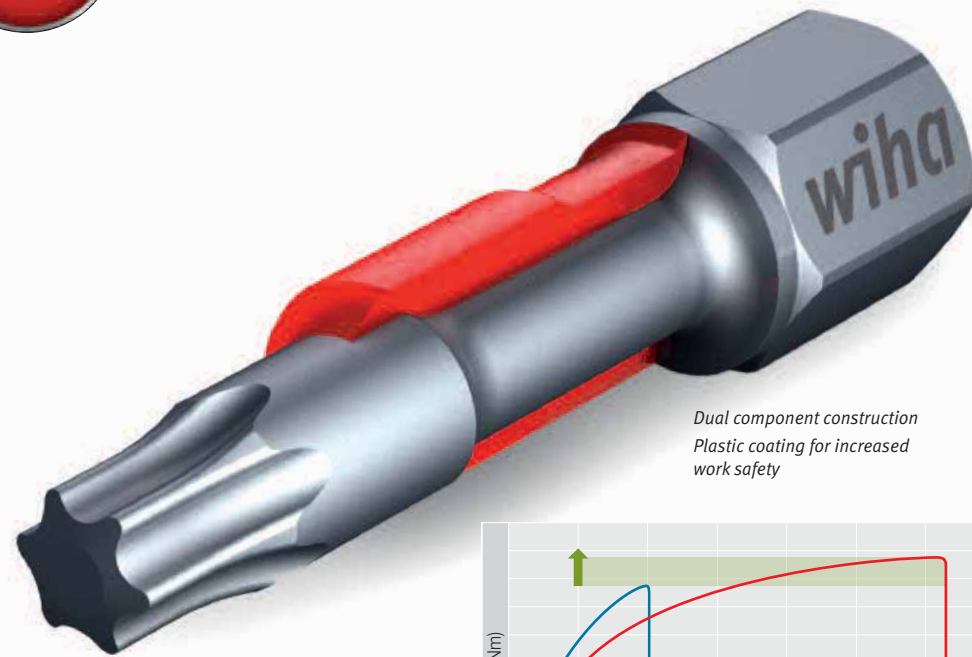

Dual component construction
Plastic coating for increased
work safety

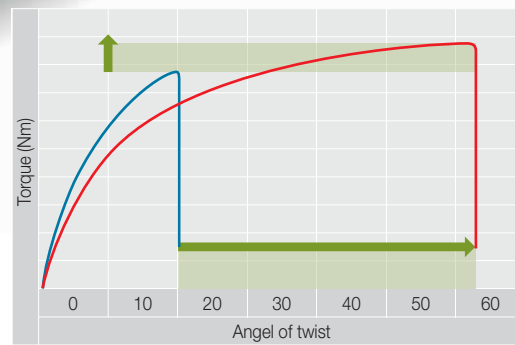

29er

The ultimate torsion bit –
plus 4mm length

- Optimal access to low-lying fastening elements
- A better view of the bit tip
- Simple handling with bit changing and bit storage
- E6.3 drive

49er


The ultimate impact bit

- X-times longer tool life with impact use
- Greater work safety, no flying chips
- E6.3 drive



Wiha MaxxTor family

- Maximum torsion zone
- Service life several times longer than standard or torsion bits
- Optimised for tough fastening – impact applications
- Ideal for high-performance drill and impact screwdrivers
- Dual component construction – CA coating for increased work safety
- E6.3 drive – perfect functionality in modern impact screwdrivers
- Impact-tested

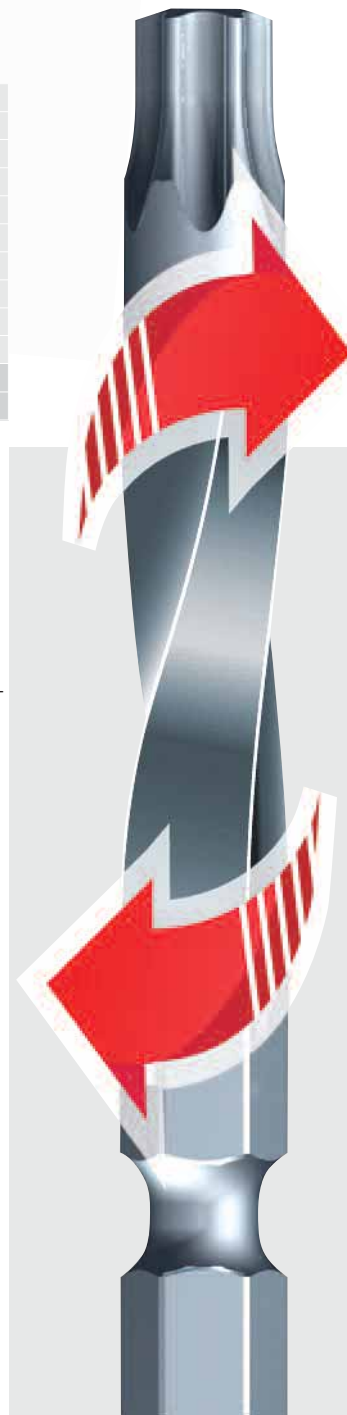

Wiha BitBuddy

Maximum efficiency by direct insert of bits.



29er



49er



Wiha BitBuddy

- Maximum efficiency: Direct bit insertion, Plug & Work & Store
- Single-hand opening mechanism
- Functional sorting system
- Compact – handy
- Design tried and tested a million times

Wiha MaxxTor bits.


The 2-component bit.



Thanks to innovative 2-component technology, equipped for increasing demands: the MaxxTor bits offer a level of safety and service life unknown until now.

High-performance drill and impact screwdrivers place tough demands on bits, for example via changing loads with impact screwdrivers or especially tough fastenings. Thus standard bits are quickly unable to meet the challenge.

That's not the case with MaxxTor bits! With their maximum torsion zone (MaxxTor), the service life of the bits is significantly increased.

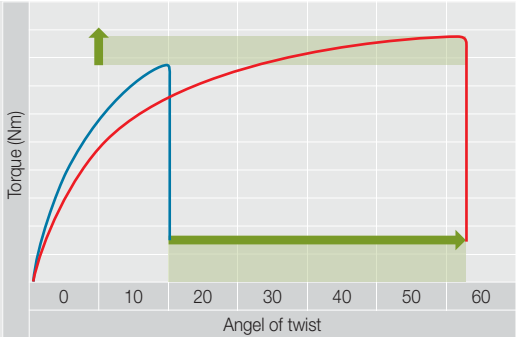

A further plus factor: with length extension from 25 to 29 mm the bits now reach low-lying fastening elements. Thanks to the length extension, direct insertion into the E6.3 drives of impact screwdriver machines is simple.

And the impact-tested quality and hardness is dependable. Added to this is optimal guidance and high work safety with the CA cover. This protects from injuries due to flying parts with shattering.

Together with the innovative Bit-Buddy bit holder, the bits can be easily changed with one hand and securely stored.

Perfectly adapted: with its 2-component construction the MaxxTor bit solves problems where standard bits fail.

In a word: top performance, especially with tough fastenings.

- Wiha MaxxTor bits.**
- Maximum service life thanks to maximum torsion zone
 - The ideal torsion bit: 29-series and 49-series
 - Optimal hardness for high loads and especially tough fastenings
 - For high-performance drill and impact screwdrivers
 - 29 mm: an additional 4 mm for significantly improved access
 - Innovative 2-component construction
 - Maximum safety due to protective CA cover
 - For all applications: PH, PZ, Torx and hexagon

29-series MaxxTor bit.



NEW
7011 M9T



29er MaxxTor bit, Phillips, style C 6.3.

Material: High quality alloyed tool steel, optimally hardened.
Casing of transparent, impact resistant plastic.

Geometry: Maximum length torsion zone individually matched to the profile.
Precision-milled profile for perfect fit and maximum performance.

Drive: DIN 3126, ISO 1173, Form C 6.3, also compatible with bit mount for E 6.3 bits.

Packaging: 5 Bits in a plastic box.
Plastic box, reusable and dust repellent.

Application: Service life several times longer than 25 mm standard bits.
The ultimate torsion bit. Ideally suited for high-performance drill and impact screwdrivers.

Extra: Plus 4 mm length.
Additional range.
A better view of the bit tip.
Simpler bit change with extended grip zone.
Two-component construction – Plastic coating for increased work safety.
Practical laser marking for easy identification of size.

Order-No.	⊕	↔	▬
36812	PH1	29	5
36813	PH2	29	5
36814	PH3	29	5

49-series MaxxTor bit.



NEW
7041 M9T



49er MaxxTor bit, Phillips, style E 6.3.

Material: High quality alloyed tool steel, optimally hardened.
Casing of transparent, impact resistant plastic.

Geometry: Extremely long torsion zone individually matched to the profile.
Precision-milled profile for perfect fit and maximum performance.

Drive: DIN 3126, ISO 1173, style C 6.3.

Packaging: 5 Bits in a plastic box.
Plastic box, reusable and dust repellent.

Application: Service life several times longer than 50 mm standard bits with impact use.
The ultimate impact bit.
Ideally suited for high-performance impact screwdrivers.

Extra: Two-component construction – Plastic coating for increased work safety.
Practical laser marking for easy identification of size.

Order-No.	⊕	↔	▬
36828	PH1	49	5
36829	PH2	49	5
36830	PH3	49	5



NEW
7012 M9T



29er MaxxTor bit, Pozidriv, style C 6.3.

5 Bits in a plastic box.

Order-No.	⊕	↔	▬
36815	PZ1	29	5
36816	PZ2	29	5
36817	PZ3	29	5



NEW
7042 M9T



49er MaxxTor bit, Pozidriv, style E 6.3.

5 Bits in a plastic box.

Order-No.	⊕	↔	▬
36831	PZ1	49	5
36832	PZ2	49	5
36833	PZ3	49	5



NEW
7015 M9T



29er MaxxTor bit, TORX®, style C 6.3.

5 Bits in a plastic box.

Order-No.	⊕	↔	▬
36822	T10	29	5
36823	T15	29	5
36824	T20	29	5
36825	T25	29	5
36826	T30	29	5
36827	T40	29	5



NEW
7045 M9T



49er MaxxTor bit, TORX®, style E 6.3.

5 Bits in a plastic box.

Order-No.	⊕	↔	▬
36838	T10	49	5
36839	T15	49	5
36840	T20	49	5
36841	T25	49	5
36842	T30	49	5
36843	T40	49	5



NEW
7013 M9T



29er MaxxTor bit, hexagon, style C 6.3.

5 Bits in a plastic box.

Order-No.	⊙	↔	▬
36818	3.0	29	5
36819	4.0	29	5
36820	5.0	29	5
36821	6.0	29	5



NEW
7043 M9T



49er MaxxTor bit, hexagon, style E 6.3.

5 Bits in a plastic box.

Order-No.	⊙	↔	▬
36834	3.0	49	5
36835	4.0	49	5
36836	5.0	49	5
36837	6.0	49	5

Wiha DuraBit.

A diamond among bits.



The extremely wear-resistant hard-metal coating considerably increases tool life.


With DuraBit, Wiha puts its innovative strength to the test. The tough torsion bit has an extremely wear-resistant hard-metal coating that gains a secure hold in the screw head.

This revolutionary coating technology originates from the aerospace industry and guarantees outstanding gripping of the bit surface. The user quickly comes to appreciate the benefits: a longer tool life, much reduced cam-out effects and superior handling enable efficient work, even with the most difficult of applications.

The wolfram carbide particles are permanently applied to the bit tip - a breaking away of the particles (as occurs with conventional, diamond-coated bits) is therefore significantly reduced.



The Dura coating reduces CamOut effects to an unbeatable minimum - no more slipping out of the bit from the screw head.



Wolfram carbide particles.

Non-corroding nickel coating.

Long-lasting, durable wolfram carbide coating increases service life of the bit by many times when compared to a diamond-coated bit. The subjacent nickel coating ensures extra-long corrosion resistance.



Wiha DuraBit.

- Extremely wear-resistant hard-metal coating also used in the aerospace industry gains a secure hold in the screw head. Outstanding reduction of CamOut forces prevents slipping out of the bit
- Wolfram carbide particles guarantee a significantly greater service life when compared to conventional diamond-coated bits
- Nickel coating of the entire bit for extra-long corrosion resistance
- Clear reduction in the cam-out effect (slipping of the bit out of the screw head) for:
 - Fatigue-free work (less force required)
 - Less wear of bit and screw
 - Safe work on delicate surfaces
- Work with Wiha DuraBits featuring torsion zones reduces the amount of time for fastening and enables economic and safe work

Style C 6.3 (1/4").



7010 DR

DuraBit with torsion zone, slotted, style C 6.3.

Material: High grade chrome-vanadium steel, through hardened.
Geometry: Torsion zone for protecting against premature breakage of bits under load.
Coating: Hard-metal coating, extremely wear-resistant.
Drive: DIN 3126, ISO 1173, style C 6.3.
Application: For effortless, safe working in demanding industrial applications and on delicate surfaces.
Extra: Non-corroding nickel coating in combination with wolfram carbide particles. Extremely wear-resistant, hard-metal coated DuraBit tip gains a secure hold in the screw head and guarantees a significantly greater service life when compared to conventional diamond-coated bits. Outstanding reduction of CamOut forces prevents slipping out of the bit from the screw.

Order-No.	①	↔	⊕	▬
23104	4.5	25	0.6	10
23106	5.5	25	0.8	10
23110	6.5	25	1.2	10

Style C 6.3 and E 6.3 (1/4").



7041 DR

DuraBit with torsion zone, Phillips, style E 6.3.

Material: High grade chrome-vanadium steel, through hardened.
Geometry: Patented torsion zone to prevent premature breaking of the bit when under stress.
Coating: Hard-metal coating, extremely wear-resistant.
Drive: DIN 3126, ISO 1173, style E 6.3.
Application: For effortless, safe working in demanding industrial applications and on delicate surfaces.
Extra: Non-corroding nickel coating in combination with wolfram carbide particles. Extremely wear-resistant, hard-metal coated DuraBit tip gains a secure hold in the screw head and guarantees a significantly greater service life when compared to conventional diamond-coated bits. Outstanding reduction of CamOut forces prevents slipping out of the bit from the screw.

Order-No.	⊕	↔	▬
23388	PH1	50	5
23390	PH2	50	5
23392	PH3	50	5



7011 DR

DuraBit with torsion zone, Phillips, style C 6.3.

Order-No.	⊕	↔	▬
23114	PH1	25	10
23116	PH2	25	10
23118	PH3	25	10



7042 DR

DuraBit with torsion zone, Pozidriv, style E 6.3.

Material: High grade chrome-vanadium steel, through hardened.
Geometry: Patented torsion zone to prevent premature breaking of the bit when under stress.
Coating: Hard-metal coating, extremely wear-resistant.
Drive: DIN 3126, ISO 1173, style E 6.3.
Application: For effortless, safe working in demanding industrial applications and on delicate surfaces.
Extra: Non-corroding nickel coating in combination with wolfram carbide particles. Extremely wear-resistant, hard-metal coated DuraBit tip gains a secure hold in the screw head and guarantees a significantly greater service life when compared to conventional diamond-coated bits. Outstanding reduction of CamOut forces prevents slipping out of the bit from the screw.

Order-No.	⊕	↔	▬
23394	PZ1	50	5
23396	PZ2	50	5
23398	PZ3	50	5



7012 DR

DuraBit with torsion zone, Pozidriv, style C 6.3.

Order-No.	⊕	↔	▬
23120	PZ1	25	10
23122	PZ2	25	10
23124	PZ3	25	10



7015 DR

DuraBit with torsion zone, TORX®, style C 6.3.

Order-No.	⊕	↔	▬
23133	T10	25	10
23135	T15	25	10
23137	T20	25	10
23139	T25	25	10
23141	T30	25	10
23143	T40	25	10



Wiha diamond bit.

Saves strength, time & money.



Finest diamond particles and sapphire particles ensure a firm grip a thousand times over.

Diamond torsion bits supplement Wiha's range of high-quality special bits. In the area of mechanical fastening the significantly greater tool life means substantial cost reductions. The new Wiha diamond torsion bits are recognisable by their silver look and striking black tip and offer an impressively secure grip in the screw.



The Diamond torsion bit from Wiha scores on two accounts: it reduces the amount of pressure that has to be applied and increases the tool life.

The torsion zone protects against torque peaks.

Wiha diamond bit.

- Reduction of:
 - Pressure forces to be applied
 - Wear and tear of bit and screw head
 - The amount of time to turn the screw and thus reduction in the costs of screw applications
 - Cam-out effect
- Extended service life as a result of the improved torsion zone
- Nickel coating of the entire bit for extra-long corrosion resistance

Style C 6.3 (1/4").



7010 D Diamond torsion bit, slotted, style C 6.3.
Material: High grade chrome-vanadium steel, through hardened.
Geometry: Torsion zone for protecting against premature breakage of bits under load.
Coating: Extremely wear-resistant diamond-sapphire coating with a long service life.
Drive: DIN 3126, ISO 1173, style C 6.3.
Application: For fatigue-free work; ideal bit for frequent working.
Extra: Non-corrosive coating.
Diamond particles and sapphire particles for optimum torque transfer and a secure grip in the screw head.

Order-No.	①	↔	⊕	⊖
21272	4.5	25	0.6	10
21216	5.5	25	0.8	10
21220	6.5	25	1.2	10

Style C 6.3 and E 6.3 (1/4").



7015 D Diamond torsion bit, TORX®, style C 6.3.
Material: High grade chrome-vanadium steel, through hardened.
Geometry: Torsion zone for protecting against premature breakage of bits under load.
Coating: Extremely wear-resistant diamond-sapphire coating with a long service life.
Drive: DIN 3126, ISO 1173, style C 6.3.
Application: For fatigue-free work; ideal bit for frequent working.
Extra: Non-corrosive coating.
Diamond particles and sapphire particles for optimum torque transfer and a secure grip in the screw head.

Order-No.	⊕	↔	⊖
21204	T10	25	10
21206	T15	25	10
21208	T20	25	10
21210	T25	25	10
21212	T30	25	10
21214	T40	25	10



7011 D Diamond torsion bit, Phillips, style C 6.3.
Material: High grade chrome-vanadium steel, through hardened.
Geometry: Patented torsion zone to prevent premature breaking of the bit when under stress.
Coating: Extremely wear-resistant diamond-sapphire coating with a long service life.
Drive: DIN 3126, ISO 1173, style C 6.3.
Application: For fatigue-free work; ideal bit for frequent working.
Extra: Non-corrosive coating.
Diamond particles and sapphire particles for optimum torque transfer and a secure grip in the screw head.

Order-No.	⊕	↔	⊖
21193	PH1	25	10
21194	PH2	25	10
21196	PH3	25	10



7041 D Diamond torsion bit, Phillips, style E 6.3.
Material: High grade chrome-vanadium steel, through hardened.
Geometry: Patented torsion zone to prevent premature breaking of the bit when under stress.
Coating: Extremely wear-resistant diamond-sapphire coating with a long service life.
Drive: DIN 3126, ISO 1173, style E 6.3.
Application: For fatigue-free work; ideal bit for frequent working.
Extra: Non-corrosive coating.
Diamond particles and sapphire particles for optimum torque transfer and a secure grip in the screw head.

Order-No.	⊕	↔	⊖
23376	PH1	50	5
23378	PH2	50	5
23380	PH3	50	5



7012 D Diamond torsion bit, Pozidriv, style C 6.3.
Material: High grade chrome-vanadium steel, through hardened.
Geometry: Patented torsion zone to prevent premature breaking of the bit when under stress.
Coating: Extremely wear-resistant diamond-sapphire coating with a long service life.
Drive: DIN 3126, ISO 1173, style C 6.3.
Application: For fatigue-free work; ideal bit for frequent working.
Extra: Non-corrosive coating.
Diamond particles and sapphire particles for optimum torque transfer and a secure grip in the screw head.

Order-No.	⊕	↔	⊖
21198	PZ1	25	10
21200	PZ2	25	10
21202	PZ3	25	10




7042 D Diamond torsion bit, Pozidriv, style E 6.3.
Material: High grade chrome-vanadium steel, through hardened.
Geometry: Patented torsion zone to prevent premature breaking of the bit when under stress.
Coating: Extremely wear-resistant diamond-sapphire coating with a long service life.
Drive: DIN 3126, ISO 1173, style E 6.3.
Application: For fatigue-free work; ideal bit for frequent working.
Extra: Non-corrosive coating.
Diamond particles and sapphire particles for optimum torque transfer and a secure grip in the screw head.

Order-No.	⊕	↔	⊖
23382	PZ1	50	5
23384	PZ2	50	5
23386	PZ3	50	5

Wiha Torsion bit.

Patented torsion zone for longer service life.



The red line indicates the steep increase in torque with hard applications, e.g. in metal.

The blue line shows a steady torque increase in soft applications, e.g. in wood working.

The main cause of wear with soft fastening applications such as in wood for example is the wear of the profile edges because the bit rattles through. A hard bit needs to be used here: Wiha HOT.

With hard fastening jobs such as hitting metal surfaces the main reason for wear is breakage of the bits. These usually occur with torque peaks near to the end of the fastening process. A tough-but-flexible bit is the answer: Wiha ZOT.

The special assortment of Wiha torsion bits with torsion zones offers optimal products for both soft and hard fastening tasks.

Wiha Torsion bit.

Wiha ZOT Torsion bits

- Tough, hard Torsion quality for **hard applications**
- Ideal for screw applications in metal and hard materials
- Elastic Torsion zone absorbs the strong torque peaks in the final phase of the application (red line)
- Highly resistant to wear and tear due to special heat treatment
- Hardness 61-2 HRC.
- For trade and DIY

Wiha HOT Torsion bits

- Extra hard Torsion quality for **soft applications**
- Ideal for screw applications in wood and soft materials
- Average requirements concerning elasticity are used to optimise performance and resistance to wear and tear (blue line)
- Hardness 63-2 HRC.
- For trade and DIY

Wiha TiN Torsions bits

- Tough, hard Torsion quality with very hard titanium-nitride (**TiN**) coating
- Optimum resistance to wear and tear due to very hard TiN coating
- Combines the advantages of Wiha HOT bits and ZOT bits in one outstanding bit
- For trade and DIY, especially for industry

Style C 6.3 (1/4").



7010 TiN TiN Torsion bit, slotted, style C 6.3.
Material: High grade chrome-vanadium steel, through hardened.
Geometry: Torsion zone for protecting against premature breakage of bits under load.
Coating: Titanium nitride for extended tool life.
Drive: DIN 3126, ISO 1173, style C 6.3.
Application: Particularly suitable for screws that require frequent working.

Order-No.	①	↔	⊕	▬
04743	4.5	25	0.6	10
04744	5.5	25	0.8	10
04745	6.5	25	1.2	10
04746	8.0	25	1.2	10

Style E 6.3 (1/4").



7041 TiN TiN Torsion bit, Phillips, style E 6.3.
Material: High grade chrome-vanadium steel, through hardened.
Geometry: Patented torsion zone to prevent premature breaking of the bit when under stress.
Coating: Titanium nitride for extended tool life.
Drive: DIN 3126, ISO 1173, style E 6.3.
Application: Particularly suitable for screws that require frequent working.

Order-No.	⊕	↔	▬
04861	PH1	50	5
04862	PH2	50	5
04863	PH3	50	5



7011 TiN TiN Torsion bit, Phillips, style C 6.3.
Geometry: Patented torsion zone to prevent premature breaking of the bit when under stress.

Order-No.	⊕	↔	▬
04654	PH1	25	10
04655	PH2	25	10
04656	PH3	25	10



7042 TiN TiN Torsion bit, Pozidriv, style E 6.3.
Material: High grade chrome-vanadium steel, through hardened.
Geometry: Patented torsion zone to prevent premature breaking of the bit when under stress.
Coating: Titanium nitride for extended tool life.
Drive: DIN 3126, ISO 1173, style E 6.3.
Application: Particularly suitable for screws that require frequent working.

Order-No.	⊕	↔	▬
04864	PZ1	50	5
04865	PZ2	50	5
04866	PZ3	50	5



7012 TiN TiN Torsion bit, Pozidriv, style C 6.3.
Geometry: Patented torsion zone to prevent premature breaking of the bit when under stress.

Order-No.	⊕	↔	▬
04657	PZ1	25	10
04658	PZ2	25	10
04659	PZ3	25	10



7015 TiN TiN Torsion bit, TORX®, style C 6.3.
Geometry: Torsion zone for protecting against premature breakage of bits under load.

Order-No.	⊕	↔	▬
20964	T6	25	10
20966	T7	25	10
20968	T8	25	10
20970	T9	25	10
20972	T10	25	10
20974	T15	25	10
20976	T20	25	10
20978	T25	25	10
20980	T27	25	10
20982	T30	25	10
20984	T40	25	10

Wiha Torsion bit.

Patented torsion zone for longer service life.

Style C 6.3 (1/4").



7010 HOT HOT Torsion bit, slotted, style C 6.3.
Material: High-grade chrome-vanadium steel, through-hardened, extra-hard.
Geometry: Torsion zone for protecting against premature breakage of bits under load.
Drive: DIN 3126, ISO 1173, style C 6.3.
Application: Particularly suitable for turning screws in wood and soft materials.

Order-No.	Ø	↔	⊖	🔩
05295	5.5	25	0.8	10
05296	6.5	25	1.2	10



7011 HOT HOT Torsion bit, Phillips, style C 6.3.
Material: High-grade chrome-vanadium steel, through-hardened, extra-hard.
Geometry: Patented torsion zone to prevent premature breaking of the bit when under stress.
Drive: DIN 3126, ISO 1173, style C 6.3.

Order-No.	⊕	↔	🔩
04486	PH1	25	10
04485	PH2	25	10
04484	PH3	25	10



7012 HOT HOT Torsion bit, Pozidriv, style C 6.3.
Material: High-grade chrome-vanadium steel, through-hardened, extra-hard.
Geometry: Patented torsion zone to prevent premature breaking of the bit when under stress.
Drive: DIN 3126, ISO 1173, style C 6.3.


Order-No.	⊕	↔	🔩
04483	PZ1	25	10
04482	PZ2	25	10
04481	PZ3	25	10



7015 HOT HOT Torsion bit, TORX®, style C 6.3.
Material: High-grade chrome-vanadium steel, through-hardened, extra-hard.
Geometry: Torsion zone for protecting against premature breakage of bits under load.
Drive: DIN 3126, ISO 1173, style C 6.3.


Order-No.	⊕	↔	🔩
31815	T10	25	10
31816	T15	25	10
31817	T20	25	10
31818	T25	25	10
31819	T30	25	10
31820	T40	25	10

Style E 6.3 (1/4").



7041 HOT HOT Torsion bit, Phillips, style E 6.3.
Material: High-grade chrome-vanadium steel, through-hardened, extra-hard.
Geometry: Patented torsion zone to prevent premature breaking of the bit when under stress.
Drive: DIN 3126, ISO 1173, style E 6.3.
Application: Particularly suitable for turning screws in wood and soft materials.

Order-No.	⊕	↔	🔩
04544	PH1	50	5
04543	PH2	50	5
04542	PH3	50	5



7042 HOT HOT Torsion bit, Pozidriv, style E 6.3.
Material: High-grade chrome-vanadium steel, through-hardened, extra-hard.
Geometry: Patented torsion zone to prevent premature breaking of the bit when under stress.
Drive: DIN 3126, ISO 1173, style E 6.3.
Application: Particularly suitable for turning screws in wood and soft materials.

Order-No.	⊕	↔	🔩
04550	PZ1	50	5
04549	PZ2	50	5
04548	PZ3	50	5



7045 HOT HOT Torsion bit, TORX®, style E 6.3.
Material: High-grade chrome-vanadium steel, through-hardened, extra-hard.
Geometry: Torsion zone for protecting against premature breakage of bits under load.
Drive: DIN 3126, ISO 1173, style E 6.3.
Application: Particularly suitable for turning screws in wood and soft materials.

Order-No.	⊕	↔	🔩
33666	T10	50	5
33667	T15	50	5
33668	T20	50	5
33669	T25	50	5
33670	T30	50	5
33671	T40	50	5

Style C 6.3 (1/4").



7010 ZOT ZOT Torsion bit, slotted, style C 6.3.
Material: High-quality chrome-vanadium steel, through-hardened, hard but elastic.
Geometry: Torsion zone for protecting against premature breakage of bits under load.
Drive: DIN 3126, ISO 1173, style C 6.3.
Application: Particularly suitable for turning screws in metal and hard materials.

Order-No.	Ø	↔	⊖	🔩
05288	4.5	25	0.6	10
05289	5.5	25	0.8	10
05290	5.5	25	1.0	10
05292	6.5	25	1.2	10
05293	8.0	25	1.2	10



7011 ZOT ZOT Torsion bit, Phillips, style C 6.3.
Material: High-quality chrome-vanadium steel, through-hardened, hard but elastic.
Geometry: Patented torsion zone to prevent premature breaking of the bit when under stress.
Drive: DIN 3126, ISO 1173, style C 6.3.
Application: Particularly suitable for turning screws in metal and hard materials.

Order-No.	⊕	↔	🔩
05299	PH1	25	10
05076	PH2	25	10
05077	PH3	25	10



7011 ZOT L ZOT Torsion bit, Phillips, style C 6.3.
Material: High-quality chrome-vanadium steel, through-hardened, hard but elastic.
Geometry: Patented torsion zone to prevent premature breaking of the bit when under stress.

Order-No.	⊕	↔	🔩
04699	PH1	50	10
04697	PH2	50	10
04695	PH3	50	10



7011 ACR ACR® torsion bit, Phillips, style C 6.3.
Material: High grade chrome-vanadium steel, through hardened.
Geometry: Patented torsion zone to prevent premature breaking of the bit when under stress.
Drive: DIN 3126, ISO 1173, style C 6.3.
Extra: Anti-Cam-Out ribs ensure a secure grip in the screw and good force transfer.

Order-No.	⊕	↔	🔩
04919	PH1	25	10
04920	PH2	25	10
04921	PH3	25	10

Style C 6.3 (1/4").



7012 ZOT ZOT Torsion bit, Pozidriv, style C 6.3.
Geometry: Patented torsion zone to prevent premature breaking of the bit when under stress.

Order-No.	⊕	↔	🔩
05074	PZ1	25	10
05075	PZ2	25	10
05069	PZ3	25	10



7012 ZOT L ZOT Torsion bit, Pozidriv, style C 6.3.
Geometry: Patented torsion zone to prevent premature breaking of the bit when under stress.

Order-No.	⊕	↔	🔩
04693	PZ1	50	10
04691	PZ2	50	10
04689	PZ3	50	10



7012 ACR ACR® torsion bit, Pozidriv, style C 6.3.
Material: High grade chrome-vanadium steel, through hardened.
Geometry: Patented torsion zone to prevent premature breaking of the bit when under stress.
Extra: Anti-Cam-Out ribs ensure a secure grip in the screw and good force transfer.

Order-No.	⊕	↔	🔩
04922	PZ1	25	10
04923	PZ2	25	10
04924	PZ3	25	10



7015 ZOT ZOT Torsion bit, TORX®, style C 6.3.
Geometry: Torsion zone for protecting against premature breakage of bits under load.

Order-No.	⊕	↔	🔩
20940	T6	25	10
20942	T7	25	10
20945	T8	25	10
20946	T9	25	10
20948	T10	25	10
20950	T15	25	10
20952	T20	25	10
20954	T25	25	10
20956	T27	25	10
20958	T30	25	10
20960	T40	25	10

Wiha Torsions-Bit.

Patented torsion zone for longer service life.

Style C 6.3 and E 6.3 (1/4").



7019 ZOT TW ZOT Torsion bit, Tri-Wing®, style C 6.3.
Material: High-quality chrome-vanadium steel, through-hardened, hard but elastic.
Geometry: Torsion zone for protecting against premature breakage of bits under load.
Drive: DIN 3126, ISO 1173, style C 6.3.
Application: For Tri-Wing® security screws.

Order-No.	⊕	↔	▬
22603	0	25	10
22604	1	25	10
22605	2	25	10
22606	3	25	10
22607	4	25	10
22608	5	25	10



7019 ZOT TS ZOT Torsion bit, Torq-Set®, style C 6.3.
Material: High-quality chrome-vanadium steel, through-hardened, hard but elastic.
Geometry: Torsion zone for protecting against premature breakage of bits under load.
Drive: DIN 3126, ISO 1173, style C 6.3.
Application: For Torq-Set® security screws.


Order-No.	⊕	↔	▬
27030	0	25	10
27028	1	25	10
26249	2	25	10
26045	3	25	10
22591	4	25	10
22592	5	25	10
22593	6	25	10
22594	8	25	10
22595	10	25	10
25572	1/4	32	10



7041 ZOT ZOT Torsion bit, Phillips, style E 6.3.
Material: High-quality chrome-vanadium steel, through-hardened, hard but elastic.
Geometry: Patented torsion zone to prevent premature breaking of the bit when under stress.
Drive: DIN 3126, ISO 1173, style E 6.3.
Application: Particularly suitable for turning screws in metal and hard materials.

Order-No.	⊕	↔	▬
04541	PH1	50	5
04540	PH2	50	5
04539	PH3	50	5

Style E 6.3 (1/4").




7042 ZOT ZOT Torsion bit, Pozidriv, style E 6.3.
Material: High-quality chrome-vanadium steel, through-hardened, hard but elastic.
Geometry: Patented torsion zone to prevent premature breaking of the bit when under stress.
Drive: DIN 3126, ISO 1173, style E 6.3.
Application: Particularly suitable for turning screws in metal and hard materials.

Order-No.	⊕	↔	▬
04547	PZ1	50	5
04546	PZ2	50	5
04545	PZ3	50	5



7049 ZOT TW ZOT Torsion bit, Tri-Wing®, style E 6.3.
Material: High-quality chrome-vanadium steel, through-hardened, hard but elastic.
Geometry: Torsion zone for protecting against premature breakage of bits under load.
Drive: DIN 3126, ISO 1173, style E 6.3.
Application: For Tri-Wing® security screws.
Extra: 90 mm bits with long spiralled torsion zone.

Order-No.	⊕	↔	▬
22609	3	50	5
33695	3	90	5
22610	4	50	5
33696	4	90	5
22611	5	50	5
33697	5	90	5
22612	6	50	5
33698	6	90	5



7049 ZOT TS ZOT Torsion bit, Torq-Set®, style E 6.3.
Material: High-quality chrome-vanadium steel, through-hardened, hard but elastic.
Geometry: Torsion zone for protecting against premature breakage of bits under load.
Drive: DIN 3126, ISO 1173, style E 6.3.
Application: For Torq-Set® security screws.
Extra: 90 mm bits with long spiralled torsion zone.

Order-No.	⊕	↔	▬
22596	4	50	5
33699	4	90	5
22597	5	50	5
33700	5	90	5
22598	6	50	5
33701	6	90	5
22599	8	50	5
33702	8	90	5
22600	10	50	5

Wiha Inkra bit.

The specialist for every angle.



The innovation for wood screws.

With the Inkra bit, Wiha has developed a revolutionary product for dry applications.

Optimum torque transmission and a reduced cam-out effect are the resulting advantages.

In practice, it is impossible to avoid working with an inclined bit axis. It is in such applications that the Inkra bit comes into its own. With its specially developed shape, the penetration depth in the screw head remains nearly constant, even in an inclined position.

Craftsmen value this bit because it makes their workmuch easier than using a standard bit.



User comfort and reduced pressure forces even in inclined positions.

Slippage and rounding of the bit tip are a thing of the past.

Wiha Inkra bit.

- Even when the drill is at an inclined position, the penetration depth in the screw head remains virtually constant
- No slipping and rounding of the bit tip and screw head
- Especially long service life
- The ideal bit for carpenters, joiners and craftsmen

Style C 6.3 (1/4").



7011 Inkra Inkra bit, Phillips, style C 6.3.
Material: High grade chrome-vanadium steel, through hardened.
Drive: DIN 3126, ISO 1173, style C 6.3.
Application: The ideal bit for areas that are difficult to access, particularly suitable for wood screws.
Extra: Non-corrosive coating. Fastening possible at slightly oblique angles.


Order-No.	⊕	↔	▬
21228	PH1	25	10
20834	PH2	25	10
21229	PH3	25	10



7012 Inkra Inkra bit, Pozidriv, style C 6.3.

Order-No.	⊕	↔	▬
21231	PZ1	25	10
08461	PZ2	25	10
21233	PZ3	25	10

Style E 6.3 (1/4").



7041 Inkra Inkra bit, Phillips, style E 6.3.
Material: High grade chrome-vanadium steel, through hardened.
Drive: DIN 3126, ISO 1173, style E 6.3.
Application: The ideal bit for areas that are difficult to access, particularly suitable for wood screws.
Extra: Non-corrosive coating. Fastening possible at slightly oblique angles.

Order-No.	⊕	↔	▬
32499	PH1	50	5
32500	PH2	50	5
32501	PH3	50	5



7042 Inkra Inkra bit, Pozidriv, style E 6.3.

Order-No.	⊕	↔	▬
32502	PZ1	50	5
32503	PZ2	50	5
32504	PZ3	50	5

Wiha Standard bit.

Full programme range in outstanding quality.



The Wiha Standard bits offer impressive quality and they are available in a versatile range.

The bits are subject to processor-aided manufacture as well as processor controlled heat treatment. Wiha thus guarantees a uniformly high product quality.



The high-quality basic material permits torque values that are far beyond the DIN standards:

- DIN 5261 for PH/PZ-bits
- DIN 5263 for slotted bits
- Camcar standards for TORX® and TORX PLUS® bits

This results in a long tool life at high torque values; this is the ideal prerequisite for standard applications.

Wiha Standard bits are the ideal multi-purpose tool to meet high requirements in terms of both quality and performance.

Wiha Standard bit.

- Robust and powerful allrounder bits for trade, industry and DIY
- Suitable for all applications. Thanks to ist hardness values of HRC 59-61, it can be used for both manual and machine applications
- Highly resistant to wear and tear for a long tool life
- Optimum fitting in DIN screws for low wear and tear as well as optimum torque transmission
- Production based on industrial quality criteria according to the valid ISO standards with uniformly high product quality

Style C 6.3 (1/4").



7010 Z Standard bit, slotted, style C 6.3.
Material: High grade chrome-vanadium steel, through hardened.
Drive: DIN 3126, ISO 1173, style C 6.3.
Application: For all types of screw applications in trade and industry.

Order-No.	①	↔	⊖	⏏
01623	4.5	25	0.6	10
01624	5.5	25	0.8	10
01626	6.5	25	1.2	10
01627	8.0	25	1.6	10

Style C 6.3 (1/4").



7011 Z Standard bit, Phillips, style C 6.3.
Material: High grade chrome-vanadium steel, through hardened.
Drive: DIN 3126, ISO 1173, style C 6.3.
Application: For all types of screw applications in trade and industry.

Order-No.	⊕	↔	⏏
05298	PH0	25	10
01657	PH1	25	10
01658	PH2	25	10
01659	PH3	25	10
01649	PH4	32	10



7010 Z L Standard bit, slotted, style C 6.3.
Material: High grade chrome-vanadium steel, through hardened.
Drive: DIN 3126, ISO 1173, style C 6.3.
Application: For all types of screw applications in trade and industry.

Order-No.	①	↔	⊖	⏏
01604	3.0	39	0.5	10
01607	3.5	39	0.6	10
01606	4.0	39	0.5	10
01610	4.0	39	0.8	10
01609	4.5	39	0.6	10
01612	5.5	39	0.8	10
01613	5.5	39	1.0	10
01617	6.5	39	1.2	10
01619	8.0	39	1.2	10
01621	8.0	39	1.6	10



7012 Z Standard bit, Pozidriv, style C 6.3.
Material: High grade chrome-vanadium steel, through hardened.
Drive: DIN 3126, ISO 1173, style C 6.3.
Application: For all types of screw applications in trade and industry.

Order-No.	⊕	↔	⏏
05300	PZ0	25	10
01688	PZ1	25	10
01689	PZ2	25	10
01690	PZ3	25	10
01681	PZ4	32	10

Wiha Standard-Bit.

Full programme range in outstanding quality.

Style C 6.3 (1/4").



7015 Z Standard bit, TORX®, style C 6.3.
Material: High grade chrome-vanadium steel, through hardened.
Drive: DIN 3126, ISO 1173, style C 6.3.
Application: For all types of screw applications in trade and industry.

Order-No.			
26250	T3	25	10
25097	T4	25	10
01711	T5	25	10
01712	T6	25	10
01713	T7	25	10
01714	T8	25	10
01715	T9	25	10
01716	T10	25	10
01717	T15	25	10
01718	T20	25	10
01719	T25	25	10
01720	T27	25	10
01721	T30	25	10
01722	T40	25	10
01723	T45	35	10
01724	T50	35	10



7015K Z Standard bit, TORX® conic, style C 6.3.
Extra: Conical profile.

Order-No.			
04925	T10	25	10
04926	T15	25	10
04927	T20	25	10
04928	T25	25	10
04929	T27	25	10
04930	T30	25	10
04931	T40	25	10



7015 Z TR Standard bit, TORX® H, style C 6.3.
Extra: Hole in the bit tip for TORX® Tamper Resistant security screws.

Order-No.			
03115	T7H	25	10
03117	T8H	25	10
01726	T9H	25	10
01727	T10H	25	10
01728	T15H	25	10
01729	T20H	25	10
01730	T25H	25	10
01731	T27H	25	10
01732	T30H	25	10
01733	T40H	25	10

Style C 6.3 (1/4").



7016 Z Standard bit, TORX PLUS®, style C 6.3.
Material: High grade chrome-vanadium steel, through hardened.
Drive: DIN 3126, ISO 1173, style C 6.3.
Application: For all types of screw applications in trade and industry.
Extra: Reinforced profile cross-section transfers approx. 25% more torque than with a TORX® profile.

Order-No.			
25994	3IP	25	10
25996	4IP	25	10
25998	5IP	25	10
23173	6IP	25	10
23175	7IP	25	10
23177	8IP	25	10
23179	9IP	25	10
23181	10IP	25	10
23183	15IP	25	10
23185	20IP	25	10
23187	25IP	25	10
23189	27IP	25	10
23191	30IP	25	10
23193	40IP	25	10



7016 Z IPR Standard bit, TORX PLUS® Security, style C 6.3.
Material: High grade chrome-vanadium steel, through hardened.
Drive: DIN 3126, ISO 1173, style C 6.3.
Application: For all types of screw applications in trade and industry.
Attention: Security profile - sold only to authorised customers. Written proof of authorisation must be received.

Order-No.			
27530	8IPR	25	1
26346	10IPR	25	10
26347	15IPR	25	10
26348	20IPR	25	10
26349	25IPR	25	10
26350	30IPR	25	10
26351	40IPR	35	10

Style C 6.3 (1/4").



7013 Z Standard bit, hex, style C 6.3.
Material: High grade chrome-vanadium steel, through hardened.
Drive: DIN 3126, ISO 1173, style C 6.3.
Application: For all types of screw applications in trade and industry.

Order-No.			
04011	1.5	25	10
01703	2.0	25	10
01704	2.5	25	10
01705	3.0	25	10
01706	4.0	25	10
01707	5.0	25	10
01708	6.0	25	10
01709	8.0	25	10
01710	10.0	25	10



7013R Z Standard bit, hex, style C 6.3.
Application: For all types of screw applications in trade and industry. Insert screws into or remove from boreholes, especially in difficult to access areas.
Extra: MagicRing® made from spring steel holds all standard screws in every position.

Order-No.			
22955	3.0	25	10
22956	4.0	25	10
22957	5.0	25	10
22958	6.0	25	10



7013 Z TR Standard bit, hex Tamper Resistant, style C 6.3.
Extra: Hole in the tip of the bit for hex Tamper Resistant security screws.

Order-No.			
25560	TR2.0	25	10
25561	TR2.5	25	10
25562	TR3.0	25	10
25563	TR4.0	25	10
25564	TR5.0	25	10
20556	TR3/32	25	N E W 10
20558	TR5/64	25	N E W 10
20559	TR7/64	25	N E W 10
20555	TR1/8	25	N E W 10
20560	TR9/64	25	N E W 10
20557	TR5/32	25	N E W 10
30050	TR3/16	25	N E W 10
26309	TR6.0	25	N E W 10

Style C 6.3 (1/4").



7017 Z Standard bit, ball end hex, style C 6.3.
Material: High grade chrome-vanadium steel, through hardened.
Drive: DIN 3126, ISO 1173, style C 6.3.
Application: For all types of screw applications in trade and industry. Especially for screws that are difficult to access. Ideal for window constructors.
Extra: The ball end enables the user to work at angles up to 25°.

Order-No.			
01734	1.5	38	10
01735	2.0	38	10
01736	2.5	38	10
01737	3.0	38	10
01738	4.0	38	10
01739	5.0	38	10
01740	6.0	38	10



7017R Z Standard bit, ball end hex, style C 6.3.
Material: High grade chrome-vanadium steel, through hardened.
Drive: DIN 3126, ISO 1173, style C 6.3.
Application: For all types of screw applications in trade and industry. Insert screws into or remove from boreholes, especially in difficult to access areas.
Extra: MagicRing® made from spring steel holds all standard screws in every position. Ball end allows a working angle up to 25°.

Order-No.			
22959	3.0	38	10
22960	4.0	38	10
22961	5.0	38	10
22962	6.0	38	10

Wiha Standard-Bit.

Full programme range in outstanding quality.

Style C 6.3 (1/4").



7018 Z Standard bit, Robertson, style C 6.3.
Material: High grade chrome-vanadium steel, through hardened.
Drive: DIN 3126, ISO 1173, style C 6.3.
Application: For all types of screw applications in trade and industry.
Extra: A tapered tip allows for easy insertion of the bit into the screw.

Order-No.			
06634	1	25	5
06635	2	25	5
06636	3	25	5

Style C 6.3 (1/4").



7019 Z SP Standard bit, spanner, style C 6.3.
Material: High grade chrome-vanadium steel, through hardened.
Drive: DIN 3126, ISO 1173, style C 6.3.
Application: For security screws - snake eye.

Order-No.			
27064	4	25	10
27065	6	25	10
27066	8	25	10
27067	10	25	10



7019 Z XZN Standard bit, multi-tooth, style C 6.3.
Material: High grade chrome-vanadium steel, through hardened.
Drive: DIN 3126, ISO 1173, style C 6.3.
Application: For use in automotive applications.

Order-No.			
26352	M3	25	10
26353	M4	25	10
26354	M5	25	10
26355	M6	25	10
26356	M8	35	10



7019 Z SIT Standard bit, SIT, style C 6.3.
Material: High grade chrome-vanadium steel, through hardened.
Drive: DIN 3126, ISO 1173, style C 6.3.
Application: For ASSY® and Pias screws.
Extra: With colour-coding.

Order-No.			
27256	SIT 10	25	pink
27257	SIT 20	25	orange
27258	SIT 25	25	green
27259	SIT 30	25	yellow
27260	SIT 40	25	light pink

Wiha Info



Colour-coding of SIT bits:

	pink	= SIT 10
	orange	= SIT 20
	green	= SIT 25
	yellow	= SIT 30
	light pink	= SIT 40

Wiha Professional bits.

Wiha Professional Bits - everything but standard.



Wiha Professional Bits are high quality bits for professional users in trade and industry.

Complete assortment
Wiha Professional Bits are characterised by an extremely wide product spectrum. More than 200 profile and length variants are available from stock. Of course Wiha is an official licensee of all common screw

Wiha – the TORX® specialist
Ranging from traditional TORX® with all its variants (classic, wedge, tamper resistant) to a wide internal TORX® spectrum and the latest TORX PLUS® safety profile, Wiha as a premium manufacturer offers professional users a complete program. Added to this are the Wiha specials with ball end and unique swivel angle as well as MagicSpring®, a 'magic' spring that securely holds screws.

Precise manufacturing
Production on extremely precise and process-robust CNC systems means high performance screw bits. Modern manufacturing technology ensures not only a perfect fit of profile tips but also outstanding rotation characteristics and concentricity of bits. Demanding customers with automated fastening processes looking for problem-free applications hold this in high regard.

Optimal heat treatment
Wiha Professional Bits are fundamentally through-hardened. Heat treatment is carried out in hardening systems with computer-controlled monitoring of hardening parameters (time, temperature, atmosphere). This enables constant hardening results. Wiha Professional Bits gain their functional fine finishing with the final annealing process, a second heat treatment following hardening that gives bits a specific characteristic. According to profile and application area, a differentiation is made between extra hard wear-resistant, tough and extra tough.



Wiha Professional bits.

- Wiha Professional bits.
- Powerful bits for professional users.
- Heat treatment matched to the profile to extend the service life
- Optimum fit in screws because of manufacturing according to DIN or the original specifications of well-known licensors
- Best rotation characteristics for stable fastening processes

Wiha Professional-Bit.

Wiha Professional Bits - everything but standard.

Style E 6.3 (1/4").



7040 Z Professional bit, slotted, style E 6.3.
Material: High grade chrome-vanadium steel, through hardened.
Drive: DIN 3126, ISO 1173, style E 6.3.
Application: For all types of screw applications in trade and industry.

Order-No.	⌀	↔	⊖	↔
33961	2.5	70	0.4	5
01790	3.0	50	0.5	5
33962	3.0	70	0.5	5
01792	3.5	50	0.6	5
33963	3.5	70	0.6	5
01791	4.0	50	0.5	5
01794	4.0	50	0.8	5
33964	4.0	70	0.8	5
01793	4.5	50	0.6	5
01795	5.5	50	0.8	5
01796	5.5	50	1.0	5
33965	5.5	70	1.0	5
01798	6.5	50	1.2	5
33966	6.5	70	1.2	5
01799	8.0	50	1.2	5
01800	8.0	50	1.6	5



7041 Z Professional bit, Phillips, style E 6.3.
Extra: Overlength bits available in lengths of 50, 70, 90, 110, 127 and 150 mm.

Order-No.	⊕	↔	↔
31960	PH00	50	5
31961	PH00	70	5
31962	PH00	90	5
32105	PH0	50	5
35456	PH0	70	5
35457	PH0	90	5
33703	PH1	50	5
01803	PH1	70	5
04126	PH1	90	5
23213	PH1	110	5
23219	PH1	127	5
22509	PH1	150	5
33704	PH2	50	5
01805	PH2	70	5
04009	PH2	90	5
05800	PH2	110	5
06888	PH2	127	5
22510	PH2	150	5
33705	PH3	50	5
04010	PH3	70	5
04127	PH3	90	5
23215	PH3	110	5
23217	PH3	127	5
22511	PH3	150	5

Style E 6.3 (1/4").



7049XH Professional bit, Xeno-slotted/Phillips, style E 6.3.
For terminal screws (slotted/ Phillips).
Application: For fastening and unfastening positive/ negative screws in switchboard systems, fuse boxes, terminal blocks and relays.

Order-No.	⊕	↔	↔
32490	SL/PH1	50	5
32491	SL/PH1	70	5
32686	SL/PH1	90	5
32492	SL/PH2	50	5
32493	SL/PH2	70	5
32687	SL/PH2	90	5



7042 Z Professional bit, Pozidriv, style E 6.3.
Extra: Overlength bits available in lengths of 50, 70, 90, 110, 127 and 150 mm.

Order-No.	⊕	↔	↔
31957	PZ0	50	5
31958	PZ0	70	5
31959	PZ0	90	5
33706	PZ1	50	5
01808	PZ1	70	5
01809	PZ1	90	5
23221	PZ1	110	5
23225	PZ1	127	5
23227	PZ1	150	5
33707	PZ2	50	5
01811	PZ2	70	5
01812	PZ2	90	5
05799	PZ2	110	5
06889	PZ2	127	5
23228	PZ2	150	5
33708	PZ3	50	5
04059	PZ3	70	5
04176	PZ3	90	5
23223	PZ3	110	5
23226	PZ3	127	5
22512	PZ3	150	5



7049XZ Professional bit, Xeno-slotted/Pozidriv, style E 6.3.
For terminal screws (slotted/ Pozidriv).
Application: For fastening and unfastening positive/ negative screws in switchboard systems, fuse boxes, terminal blocks and relays.

Order-No.	⊕	↔	↔
32494	SL/PZ1	50	5
32495	SL/PZ1	70	5
32688	SL/PZ1	90	5
32496	SL/PZ2	50	5
32497	SL/PZ2	70	5
32689	SL/PZ2	90	5

Style E 6.3 (1/4").



7045R Professional bit, TORX® with MagicSpring®, style E 6.3.
Material: High grade chrome-vanadium steel, through hardened.
Drive: DIN 3126, ISO 1173, style E 6.3.
Application: For all types of screw applications in trade and industry.
Extra: MagicSpring® made of stainless steel holds TORX® screws tight at various angles.
Attention: Screw must not be attached to the rotating bit.

Order-No.	⊗	↔	↔
34452	T10	50	5
34453	T15	50	5
34454	T20	50	5
34455	T25	50	5
34456	T30	50	5
34457	T40	50	5

Style E 6.3 (1/4").



7045BE Professional bit, TORX® ball end, style E 6.3.
Material: High grade chrome-vanadium steel, through hardened.
Drive: DIN 3126, ISO 1173, style E 6.3.
Application: For all internal TORX® screws, especially in hard-to-reach places.
Extra: The TORX® ball end enables fastening and unfastening at an angle of up to 25°. With elongated TORX® profile behind ball end.

Order-No.	⊗	↔	↔
32409	T9	50	5
32410	T10	50	5
32416	T10	70	5
32417	T15	50	5
32418	T15	70	5
32411	T20	50	5
32419	T20	70	5
32420	T20	90	5
32412	T25	50	5
32421	T25	70	5
32422	T25	90	5
32413	T27	50	5
32414	T30	50	5
32423	T30	70	5
32424	T30	90	5
32415	T40	50	5



7045BE 9570 Professional bits TORX® ball end in compact bit band, 10-pcs.
Blister packed.
Bits: 70 mm Standard bits.
Application: Extra long bits for all types of fastening in trade and industry.
Extra: Compact plastic bit band with belt clip.

Order-No.	Series	↔
32804	7045BE 9570	1
⊗	7045BE	2xT10 2xT15 2xT20 2xT25 2xT30

Wiha Professional-Bit.

Wiha Professional Bits - everything but standard.

Style E 6.3 (1/4").



7045 Z Professional bit, TORX®, style E 6.3.
Material: High grade chrome-vanadium steel, through hardened.
Drive: DIN 3126, ISO 1173, style E 6.3.
Application: For all types of screw applications in trade and industry.
Extra: Overlength bits in lengths of 50, 70, 90, 110 and 150 mm.

Order-No.	⌘	↔	▬
32299	T5	50	5
32302	T6	50	5
33709	T6	70	5
33717	T6	90	5
32303	T7	50	5
33710	T7	70	5
33718	T7	90	5
32304	T8	50	5
33711	T8	70	5
33719	T8	90	5
32305	T9	50	5
33712	T9	70	5
33720	T9	90	5
32306	T10	50	5
33713	T10	70	5
33721	T10	90	5
33725	T10	110	5
33726	T10	150	5
32307	T15	50	5
33714	T15	70	5
33722	T15	90	5
33727	T15	110	5
33728	T15	150	5
32308	T20	50	5
33715	T20	70	5
33723	T20	90	5
33729	T20	110	5
33730	T20	150	5
32309	T25	50	5
33716	T25	70	5
33724	T25	90	5
33731	T25	110	5
33732	T25	150	5
33920	T27	50	5
33921	T27	70	5
33922	T27	90	5
33923	T30	50	5
33924	T30	70	5
33925	T30	90	5
33926	T30	110	5
33927	T30	150	5
33928	T40	50	5
33929	T40	70	5
33930	T40	90	5
33931	T40	110	5
33932	T40	150	5

Style E 6.3 (1/4").



7045 Z TR Professional bit, TORX® H, style E 6.3.
Material: High grade chrome-vanadium steel, through hardened.
Drive: DIN 3126, ISO 1173, style E 6.3.
Application: For all types of screw applications in trade and industry.
Extra: Hole in the bit tip for TORX® Tamper Resistant security screws.

Order-No.	⌘	↔	▬
21045	T7H	50	5
21047	T8H	50	5
20218	T9H	50	5
20219	T10H	50	5
24867	T15H	50	5
20220	T20H	50	5
20221	T25H	50	5
20222	T27H	50	5
20223	T30H	50	5
20224	T40H	50	5



7046 Z Professional bit, TORX PLUS®, style E 6.3.
Material: High grade chrome-vanadium steel, through hardened.
Drive: DIN 3126, ISO 1173, style E 6.3.
Application: For all types of screw applications in trade and industry.
Extra: Reinforced profile cross-section transfers approx. 25% more torque than with a TORX® profile.

Order-No.	⌘	↔	▬
28481	5IP	50	5
26000	6IP	50	5
26002	7IP	50	5
23195	8IP	50	5
23197	9IP	50	5
23199	10IP	50	5
23201	15IP	50	5
23203	20IP	50	5
23205	25IP	50	5
23207	27IP	50	5
23209	30IP	50	5
23211	40IP	50	5



7048 Z Professional bit, Robertson, style E 6.3.
Material: High grade chrome-vanadium steel, through hardened.
Drive: DIN 3126, ISO 1173, style E 6.3.
Application: For all types of screw applications in trade and industry.
Extra: A tapered tip allows for easy insertion of the bit into the screw.

Order-No.	⌘	↔	▬
06637	1	50	5
06638	2	50	5
06639	3	50	5

Style E 6.3 (1/4").



7047R Z Professional bit, hexagon ball end, style E 6.3.
Material: High grade chrome-vanadium steel, through hardened.
Drive: DIN 3126, ISO 1173, style E 6.3.
Application: For all types of screw applications in trade and industry.
To insert and remove screws from holes or cavities, specially in difficult to access areas.
Extra: MagicRing® made from spring steel holds all standard screws in every position. Ball end allows a working angle up to 25°.

Order-No.	⌘	↔	▬
25739	3.0	50	5
25740	4.0	50	5
25741	5.0	50	5
25742	6.0	50	5



7043R Z Professional bit, hexagon, style E 6.3.
Material: High grade chrome-vanadium steel, through hardened.
Drive: DIN 3126, ISO 1173, style E 6.3.
Application: For all types of screw applications in trade and industry.
To insert and remove screws from holes or cavities.
Extra: MagicRing® made from spring steel holds all standard screws in every position.

Order-No.	⌘	↔	▬
23145	3.0	50	5
23147	4.0	50	5
23149	5.0	50	5
23151	6.0	50	5

Style E 6.3 (1/4").



7043 Z Professional bit, hexagon, style E 6.3.

Order-No.	⌘	↔	▬
05301	1.5	50	5
05302	2.0	50	5
34554	2.0	70	5
05303	2.5	50	5
34555	2.5	70	5
04194	3.0	50	5
34556	3.0	70	5
04195	4.0	50	5
34557	4.0	70	5
04196	5.0	50	5
34558	5.0	70	5
04197	6.0	50	5
34559	6.0	70	5
04198	8.0	50	5
34560	8.0	70	5



NEW
7041 VB1 Single bits display, 90 mm bits.
Acrylic glass display with 70 pieces.

Order-No.				
36162	Acrylic glass display with 70 pieces.			
⊕	7041 Z	5xPH1	5xPH2	5xPH3
⊕	7042 Z	5xPZ1	5xPZ2	5xPZ3
⊗	7045 Z	5xT10	5xT15	5xT20
		5xT25	5xT30	5xT40
○	7143	5x1/4	5x1/4	

NEW
7041 VB2 Single bits display, 150 mm bits.
Acrylic glass display with 70 pieces.

Order-No.				
36163	Acrylic glass display with 70 pieces.			
⊙	7143	5x1/4	5x1/4	
⊕	7041 Z	5xPH1	5xPH2	5xPH3
⊕	7042 Z	5xPZ1	5xPZ2	5xPZ3
⊗	7045 Z	5xT10	5xT15	5xT20
		5xT25	5xT30	5xT40

Wiha threaded bit.

For optimised use in stationary screw systems.

For M4 and M5.





7311 Z

Threaded bit M4, Phillips.

Material: High grade chrome-vanadium steel, through hardened.

Drive: Screw thread M4.

Application: For optimised use in stationary screw systems.

Order-No.						
01937	PH1	33	5.5	M4	8.00	10
01938	PH2	33	6.0	M4	8.00	10





7312 Z

Threaded bit M4, Pozidriv.

Material: High grade chrome-vanadium steel, through hardened.

Drive: Screw thread M4.

Application: For optimised use in stationary screw systems.

Order-No.						
01939	PZ1	33	5.5	M4	8.00	10
01940	PZ2	33	6.0	M4	8.00	10





7321 Z

Threaded bit M5, Phillips.

Material: High grade chrome-vanadium steel, through hardened.

Drive: Screw thread M5.

Application: For optimised use in stationary screw systems.

Order-No.						
01942	PH2	33	7.0	M5	8.00	10
01943	PH2	45	6.0	M5	8.00	10





7322 Z

Threaded bit M5, Pozidriv.

Material: High grade chrome-vanadium steel, through hardened.

Drive: Screw thread M5.

Application: For optimised use in stationary screw systems.

Order-No.						
01945	PZ2	33	7.0	M5	8.00	10
01946	PZ2	45	6.0	M5	8.00	10





7325 Z

Threaded bit M5, TORX®.

Material: High grade chrome-vanadium steel, through hardened.

Drive: Screw thread M5.

Application: For optimised use in stationary screw systems.

Order-No.						
35400	T10	45	6.0	M5	8.00	10
35401	T15	45	6.0	M5	8.00	10
35402	T20	45	6.0	M5	8.00	10
35403	T25	45	6.0	M5	8.00	10

For M6 and 10/32" UNF.





7331 Z

Threaded bit M6, Phillips.

Material: High grade chrome-vanadium steel, through hardened.

Drive: Screw thread M6.

Application: For optimised use in stationary screw systems.

Order-No.						
04678	PH2	33	8.0	M6	8.00	10
04677	PH2	45	8.0	M6	8.00	10





7332 Z

Threaded bit M6, Pozidriv.

Material: High grade chrome-vanadium steel, through hardened.

Drive: Screw thread M6.

Application: For optimised use in stationary screw systems.

Order-No.						
04671	PZ2	33	8.0	M6	8.00	10
04670	PZ2	45	8.0	M6	8.00	10





7341 Z

Threaded bit 10/32" UNF, Phillips.


Material: High grade chrome-vanadium steel, through hardened.

Drive: Screw thread 10/32" UNF.

Application: For optimised use in stationary screw systems.

Order-No.						
01947	PH2	45	6.0	10/32 UNF	8.00	10





7342 Z

Threaded bit 10/32" UNF, Pozidriv.

Material: High grade chrome-vanadium steel, through hardened.

Drive: Screw thread 10/32" UNF.

Application: For optimised use in stationary screw systems.

Order-No.						
01948	PZ2	45	6.0	10/32 UNF	8.00	10

Wiha special bits.

Customised for your application.

Construction Kit	Drive	No.	Profile	No.	Length
	C 4	= 0	⌀ Slotted	= 0	for 25 mm - 152 mm
	C 6,3	= 1	⊕ Phillips PH	= 1	
	C 8	= 2	⊕ Pozidriv PZ	= 2	
	A 5,5	= 3	⬢ Hex	= 3	
	E 6,3	= 5	⬠ TORX®	= 5	
	G 7	= 6	⬠ TORX PLUS®	= 6	
			⬢ Ball end hex	= 7	
			⬢ Robertson	= 8	
			Special profile	= 9	
			⬢ Spanner	= 9 SP	
			⬢ Torq-Set®	= 9 TS	
			⬢ Tri-Wing®	= 9 TW	



Make the most of our experience. Our expertise in the manufacture of all types of fastening tools enables us to produce bits to your specifications.

Sophisticated manufacturing facilities with qualified employees, state-of-the-art machinery and a certified quality assurance system guarantee you maximum quality and flexibility.

The construction kit of your special bit.



The Wiha special bit range is a construction kit system for your special bit.

- Advantages:**
- Attractive price
 - No additional costs for technical drawings
 - Short delivery time
 - Flexibility

Wiha industrial quality - bits to the highest standard

Industrial quality expands the Wiha construction kit. We adapt the hardness, coating, form and concentricity of the bits precisely according to your requirements.

Hardness: 57 HRC - 63 HRC
Coating: Tungsten Carbide (Dura), Diamond, TiN
Form: According to specification drawings
Straightness: Straightness with a tolerance of +/-0.05 mm

Perfect concentricity: essential for bits in automated machines and/or with use of guide jackets.

- Advantages:**
- Screws easily located and fastened securely.
 - Low-vibration fastening thanks to minimum imbalance.
 - Idle times reduced.

Wiha special bits.

For ex., Wiha Halfmoon bits.

- Halfmoon bits are predominantly used on production lines for high-tech products, such as hard disks and mobile phones.
- The halfmoon drive ensures a secure fit and straightforward bit exchange.
- Our customers require an exact fit and maximum truth of running for a frictionless production process.
- Wiha bits are being used to optimum effect by big-name companies operating all over the world.

Contact us. We would be pleased to help.

Wiha bits for drive system C 4.

For screw connections in miniature applications.

These bits fit directly in the machines of the manufacturers: Perret



7000 Z Standard bit, slotted, style C 4.
Material: High grade chrome-vanadium steel, through hardened.
Drive: DIN 3126, ISO 1173, style C 4.
Application: For particularly small screws.

Order-No.	Ø	28	0.20	10
04728	0.8	28	0.20	10
04727	1.2	28	0.25	10
04726	1.5	28	0.25	10
04725	1.8	28	0.30	10
04724	2.0	28	0.40	10
04723	2.5	28	0.40	10
04722	3.0	28	0.50	10
04721	3.5	28	0.60	10
04729	4.0	28	0.80	10



7005 Z Standard bit, TORX®, style C 4.
Material: High grade chrome-vanadium steel, through hardened.
Drive: DIN 3126, ISO 1173, style C 4.
Application: For particularly small screws.

Order-No.	Ø	28	10
20842	T3	28	10
20843	T4	28	10
04716	T5	28	10
04715	T6	28	10
04714	T7	28	10
04713	T8	28	10
04712	T9	28	10
04711	T10	28	10



7001 Z Standard bit, Phillips, style C 4.
Material: High grade chrome-vanadium steel, through hardened.
Drive: DIN 3126, ISO 1173, style C 4.
Application: For particularly small screws.

Order-No.	Ø	28	10
04720	PH000	28	10
04719	PH00	28	10
04718	PH0	28	10
04717	PH1	28	10



7003 Z Standard bit, hex, style C 4.
Material: High grade chrome-vanadium steel, through hardened.
Drive: DIN 3126, ISO 1173, style C 4.
Application: For particularly small screws.

Order-No.	Ø	28	10
04737	0.7	28	10
04736	0.9	28	10
04735	1.3	28	10
04734	1.5	28	10
04733	2.0	28	10
04732	2.5	28	10
04731	3.0	28	10
04730	4.0	28	10



7110M Universal holder, magnetic, style E 6.3.
Suitable for: For bits according to DIN 3126, ISO 1173 style C 4.
Drive: DIN 3126, ISO 1173, style E 6.3.
Application: Suitable for 4 mm bits, e.g. Wiha 7000-7005 series.
Extra: With magnet.

Order-No.	Ø	1/4	60	10
32505	C4	1/4	60	10

Accessories for Wiha bits, style C 4.



2691 SYSTEM 4 SoftFinish®-telescopic handle.
Ergonomic multi-component handle with roll-off protection.
Handle: With 4 mm hex retainer for all SYSTEM 4 blades.
Enables adjustable blade lengths from 18 - 90 mm.
ClickStop ball clamp guarantees a secure hold and rapid blade exchange.
Application: Ideal for all precision work in the fields of electronics and mechanics.

Order-No.	Ø	105	23	10
30373	4.0	105	23	10



U759 00 SYSTEM 4 bit holder.
Suitable for C 4 (4 mm) bits.
Blade: Chrome-vanadium steel, through hardened, electro-plated.

Order-No.	Ø	135	4.0	9	1
09195	4.0	135	4.0	9	1



7000 EB16 ESD SYSTEM 4 ESD bit set, 16 pcs.
Mixed sets.
Handle: SYSTEM 4 SoftFinish®-telescopic ESD handle.
ESD-safe (dissipative), surface resistance 10⁶ - 10⁹ ohms.
Enables adjustable bit holder blade length.
Standards: DIN 3126, ISO 1173, style C 4.
IEC 61340-5-1.
Case: No danger to electronic components with use of ESD-safe materials.
Tough, space-saving metal box.
Application: Bit set suitable for smallest screws with electronic components.
Flexible working via adjustable blade length and rapid replacement of bit inserts.

Order-No.	Series	1
33503	7000 EB16 ESD	1
2691ESD S	SYSTEM 4 SoftFinish®-telescopic ESD handle.	
U759 00	SYSTEM 4 bit holder.	
U750	1x2.0 1x3.0	
U751	1xPH000 1xPH00 1xPH0 1xPH1	
U757	1xT3 1xT4 1xT5 1xT6 1xT8	
U753	1x0.9 1x1.3 1x1.5	



7000 EB26 ESD SYSTEM 4 ESD bit set, 26 pcs.
Mixed sets.
Handle: SYSTEM 4 SoftFinish®-telescopic ESD handle.
ESD-safe (dissipative), surface resistance 10⁶ - 10⁹ ohms.
Enables adjustable bit holder blade length.
Standards: DIN 3126, ISO 1173, style C 4.
IEC 61340-5-1.
Case: No danger to electronic components with use of ESD-safe materials.
Tough, space-saving metal box.
Application: Universal set for especially small screws with electronic components.
Flexible working via adjustable blade length and rapid replacement of bit inserts.

Order-No.	Series	1
33848	7000 EB26 ESD	1
2691ESD S	SYSTEM 4 SoftFinish®-telescopic ESD handle.	
U759 00	SYSTEM 4 bit holder.	
U750	1x1.5 1x2.0 1x3.0 1x4.0	
U751	1xPH000 1xPH00 1xPH0 1xPH1	
U757	1xT3 1xT4 1xT5 1xT6 1xT7 1xT8 1xT9 1xT10	
U753	1x0.7 1x0.9 1x1.3 1x1.5 1x2.0 1x2.5 1x3.0 1x4.0	

Wiha bits for drive system style C 8 (5/16") and style G 7.

Style C 8 (5/16").



7020 Z Standard bit, slotted, style C 8.
Material: High grade chrome-vanadium steel, through hardened.
Drive: DIN 3126, ISO 1173, style C 8.

Order-No.	Ø	→	⇄	⇄
01741	5.5	41	0.8	10
01742	5.5	41	1.0	10
01744	6.5	41	1.2	10
01745	8.0	41	1.2	10
01746	8.0	41	1.6	10
01747	10.0	41	1.6	10
01748	12.0	41	2.0	10



7021 Z Standard bit, Phillips, style C 8.

Order-No.	Φ	→	⇄	⇄
01749	PH1	32		10
01750	PH2	32		10
01751	PH3	32		10
01753	PH4	38		10



7022 Z Standard bit, Pozidriv, style C 8.

Order-No.	Φ	→	⇄	⇄
01754	PZ1	32		10
01755	PZ2	32		10
01756	PZ3	32		10
01758	PZ4	38		10



7025 Z Standard bit, TORX®, style C 8.

Order-No.	Φ	→	⇄	⇄
01765	T25	35		10
01766	T27	35		10
01767	T30	35		10
01768	T40	35		10
01769	T45	35		10
01770	T50	35		10
01771	T55	35		10



7023 Z Standard bit, hex, style C 8.

Order-No.	Φ	→	⇄	⇄
01759	3.0	30		10
01760	4.0	30		10
01761	5.0	30		10
01762	6.0	30		10
01763	8.0	30		10
01764	10.0	30		10

Style G 7.



7081 ZOT ZOT Torsion bit, Phillips, style G 7.
Material: High grade chrome-vanadium steel, through hardened.
Geometry: Patented torsion zone to prevent premature breaking of the bit when under stress.
Drive: DIN 3126, ISO 1173, style G 7.

Order-No.	Φ	→	⇄	⇄
04960	PH1	53		5
04961	PH2	53		5
04962	PH3	53		5



7082 ZOT ZOT Torsion bit, Pozidriv, style G 7.
Material: High grade chrome-vanadium steel, through hardened.
Geometry: Patented torsion zone to prevent premature breaking of the bit when under stress.
Drive: DIN 3126, ISO 1173, style G 7.

Order-No.	Φ	→	⇄	⇄
04553	PZ1	53		5
04552	PZ2	53		5
04551	PZ3	53		5



7183 Universal holder, magnetic/ retaining ring, style G 7.
Sleeve: Stainless steel.
Suitable for: For bits according to DIN 3126, ISO 1173 style C 6.3.
Drive: DIN 3126, ISO 1173, style G 7.
Application: For applications where the bit must be held tight e.g. assembly lines.
Extra: With strong Neodym magnet.

Order-No.	Φ	→	⇄	⇄
01919	1/4	G7	72	10

Wiha CentroFix system.

Quick and professional.



Drilling, countersinking, driving screws and cutting threads is child's play with the Wiha CentroFix System. The innovative CentroFix quick-release holder forms the basis for a variety of hex-driven tools.

With CentroFix System, Wiha once again demonstrates that the user is central. The trend towards battery-powered drivers is continuing undiminished. Efficient models are greatly increasing the number of application areas and enabling more flexible working conditons. The Wiha CentroFix System also opens up these application areas to professional use.

With the CentroFix quick-release holder, Wiha closes the gap between the chuck of the battery-powered drivers and the quick-release holder for driver bits. The CentroFix holder allows rapid tool change, provides a secure fit and meets the more demanding requirements for concentricity and pull-off forces.



Flexible, easy and quick – drill, countersink and turn screws with the Wiha CentroFix System for wood ...
... or with the Wiha CentroFix System for metal.



Wiha CentroFix system.

- **Quick**
Saves time when changing tools
- **Secure**
Fixed connection between tool insert and holder
- **Zero-play**
For exact boreholes
- **Universal**
Fits all 1/4" hex drives

CentroFix - one for all.



7148C CentroFix quick release holder, style E 6.3.
Sleeve: Metal, coated.
Suitable for: For bits according to DIN 3126, ISO 1173 style C 6.3 and E 6.3.
Drive: DIN 3126, ISO 1173, style E 6.3.
Packaging: Plastic box, reusable and dust repellent.
Application: Whenever the bit needs a secure and zero-play hold. Optimised for the use of drill bits. Ideal for Torx bits.
Extra: Due to the special holding mechanism, this bit holder holds all types of bits with 1/4" hex drive. The play between bit and holder is reduced to a minimum. Real single-handed operation for fast bit exchange.

Order-No.	Φ	→	⇄	⇄
32477	1/4	1/4	60	10

CentroFix quick release holder with magnet, see page 200

Wiha drill bits.

Just keep on working.

Wood twist drill bit.



7804 **Wood twist drill bit, style C 6.3.**
Material: High grade chrome-molybdenum steel, ground.
Packaging: Blister packed.
Drive: With 1/4" hex shank according to DIN 3126 C 6.3.
Application: Especially suitable for boreholes in soft and hardwoods, as well as in veneered and coated laminated materials.
Extra: By means of careful rough-cutting, drilling of pocket holes is easy and does not tear the material.
With centring tip for exact drilling.
Particularly suitable for use in battery-powered drivers.

Order-No.	⌀	↔	↔	⊙	⊔
27873	3.0	70	36	1/4	10
27876	4.0	75	43	1/4	10
27877	5.0	85	56	1/4	10
27879	6.0	95	66	1/4	10
27880	8.0	110	81	1/4	10
27881	10.0	110	81	1/4	10



79184 T19 **Wood twist drill set, 19 pcs.**
Pouch: High-quality nylon pouch, 13 x 2 x 10 cm.
Bits: 25 mm Standard and Torsion bits, wood twist drill bits, countersink bit.
Holder: CentroFix quick release holder, magnetic, style E 6.3.
Application: Compact range for drilling, countersinking and driving screws in wood.
Extra: Pouch with sturdy metal belt clip.

Order-No.	Series						⊔
28024	79184 T19						1
⊗	7804	1x3.0	1x4.0	1x5.0	1x6.0	1x8.0	
⊗	7806	1x12.4					
⊕	7011 ZOT	1xPH2					
⊕	7012 ZOT	1xPZ1	3xPZ2	1xPZ3			
⊗	7015 Z	1xT15	1xT20	1xT25	1xT30		
⊗	7019 Z SIT	1xSIT 20	1xSIT 30				
	7148 C	CentroFix quick release holder, style E 6.3.					

7918 TL **Nylon pouch, empty.**

Order-No.	Series	⊔
28028	7918 TL	1

Twist drill bit.



7805 **Twist drill bit, style C 6.3.**
Material: High-quality HSS steel, ground.
Packaging: Blister packed.
Drive: With 1/4" hex shank according to DIN 3126 C 6.3.
Application: Universal application in metal, plastic and wood.
Extra: Particularly suitable for use in battery-powered drivers.
Special rivet-hole sizes 3.1, 4.1 and 5.1.

Order-No.	⌀	↔	↔	⊙	⊔
27882	3.0	38	16	1/4	10
28055	3.1	38	16	1/4	10
27883	3.3	40	18	1/4	10
27884	4.0	43	22	1/4	10
28056	4.1	43	22	1/4	10
27885	4.2	43	22	1/4	10
27886	5.0	48	26	1/4	10
28057	5.1	48	26	1/4	10
27887	6.0	48	26	1/4	10
27888	6.8	48	30	1/4	10
27889	8.0	50	32	1/4	10
27890	8.5	51	34	1/4	10
27891	10.0	54	37	1/4	10



79185 T19 **Twist drill set, 19 pcs.**
Pouch: High-quality nylon pouch, 13 x 2 x 10 cm.
Bits: 25 mm Standard and Torsion bits, twist drill bits.
Holder: CentroFix quick release holder, magnetic, style E 6.3.
Application: Compact assortment for universal application when driving screws.
Extra: Pouch with sturdy metal belt clip.

Order-No.	Series						⊔
28025	79185 T19						1
⊗	7805	1x3.0	1x4.0	1x4.2	1x5.0		
		1x6.0	1x8.0				
⊕	7011 ZOT	2xPH1	3xPH2	1xPH3			
⊕	7012 ZOT	2xPZ2					
⊗	7015 Z	1xT15	1xT20	1xT25	1xT30		
	7148 C	CentroFix quick release holder, style E 6.3.					

Combination drill bit. Countersink bit.



7807 **Combination drill bit, style C 6.3.**
Material: High-quality HSS steel, ground.
Packaging: Blister packed.
Drive: With 1/4" hex shank according to DIN 3126 C 6.3.
Application: Drilling, cutting threads and burring.
For assembly work, repair and rethreading.
Can be used in metal and plastic.
Extra: Three applications in a single work step.
Particularly suitable for use in battery-powered drivers.

Order-No.	⊙	↔	⊙	⊔
27897	M3	36	1/4	10
27898	M4	39	1/4	10
27899	M5	41	1/4	10
27900	M6	44	1/4	10
27901	M8	51	1/4	10
27963	M10	65	1/4	10



79187 B5 **Combination drill bit set, 5 pcs.**
Extra: In plastic box.
Order-No. Series ⊔
28026 79187 B5 1
⊙ 7807 M3x36 M4x39 M5x41 M6x44 M8x51



7806 **Countersink bit, style C 6.3.**
Material: High-quality HSS steel, ground.
Packaging: Blister packed.
Drive: With 1/4" hex shank according to DIN 3126 C 6.3.
Application: Universal application in metal, plastic and wood.
Extra: Particularly suitable for use in battery-powered drivers.
Guarantees outstanding removal of cuttings, no-rattle operation and smooth surface.

Order-No.	⌀	↔	⊙	⊔	Ø min.	⊔
27892	6.3	35	1/4	M3	1.5	10
27893	8.3	35	1/4	M4	2.0	10
27894	10.4	35	1/4	M5	2.5	10
27895	12.4	35	1/4	M6	2.8	10
27896	16.5	35	1/4	M8	3.2	10
28058	20.5	35	1/4	M10	3.5	10



79186 B5 **Countersink set, 5 pcs.**
Extra: In plastic box.
Order-No. Series ⊔
28027 79186 B5 1
⊗ 7806 6.3x35 8.3x35 10.4x35 12.4x35 16.5x35

Universal drill bit.



7848 **Universal drill bit, style E 6.3.**
Material: High-quality HSS steel, ground.
Packaging: Blister packed.
Drive: 1/4" hex universal drill in accordance with DIN 3126, style E 6.3.
Application: For use in (battery-powered) screwdrivers; suitable for drilling holes in a multitude of materials (light masonry, light building materials, non-ferrous metal, metal, wood, plastics etc.) as well as light drilling on smooth and hard surfaces.
Extra: Exact drilled holes via the special cutting edge.
Especially long service life.

Order-No.	⌀	↔	↔	⊙	⊔
32292	4	85	45	1/4	10
32293	5	96	50	1/4	10
32294	6	101	60	1/4	10
32295	7	101	60	1/4	10
32296	8	120	70	1/4	10
32297	10	120	70	1/4	10



281-02 **Bit holder with handle, magnetic, 1/4".**
Handle: Wiha SoftFinish® multi-component handle with roll-off protection.
Bit holder: Stainless steel with strong magnet.
Suitable for: For bits according to DIN 3126, ISO 1173 style C 6.3 and E 6.3.
Application: Compact screwdriver together with bits, 1/4".
Together with Wiha countersink bits, can be used as manual deburrer.

Order-No.	⊙	↔	⊔	⊔
32160	1/4	125	36	1

Wiha power nut driver product line.

The entire line for hand and machine use.



For those who place high demands in their tools: the extensive Wiha nut driver product line for hand and machine operation will definitely satisfy.

The high quality power nut driver inserts for example stand up to especially heavy loading. Another advantage is their hexagon opening with rounded corners: It grasps even flat bolts easily and extremely gently. With the incorporated permanent magnet and optional bit holder, particular attention was also paid to practical, user-friendly details.

A remedy for tough cases: The new hand impact screwdriver with hand protection and a changeover function is a specialist for jammed bolts and nuts. The matching 5/16" bits for PH, slotted and TORX® drives are produced of special chrome vanadium steel and through-hardened, making them especially impact and break-resistant.



The jack-of-all-trades product line is rounded off with universal connection pieces, parts and smooth-running ratchets. With a universal joint (connection pieces) and a locking button (ratchets) for holding or quickly releasing the attached tools, they're excellently equipped for working in hard-to-reach places. The 3-component handle (SoftFinish®) of the ratchets also guarantees comfortable, safe use.

Whether tools or accessories, whether its hand or machine-operated nut drivers: With this versatile assortment the user is also equipped for difficult and special cases.



Wiha power nut driver product line.

- Extensive application possibilities and large range of tools for electric and pneumatic screwdrivers as well as hand-operated nut driver inserts
- Nut driver inserts (1/4" drive) in high-quality special chrome vanadium steel; also available with incorporated permanent magnet that safely guides the screws when installing
- Hand impact screwdriver with hardened, lacquered impact end against chipping of chrome parts or mushroom-shaped deformations

Machine-operated nut driver inserts.



7244 Power nut driver insert, hex - style E 6.3.

Material: High-quality chrome vanadium alloy steel, through-hardened, phosphate coated surface.
Drive: DIN 3126, ISO 1173, style E 6.3.
Application: For mechanical fastening and unfastening.
Extra: Rounded hex opening in the corners for protection of the screw heads.

Order-No.	Ø	Ø	Ø	Ø	Ø
32513	5.5	9	50		5
32514	7	11	50		5
32515	8	12	50		5
32516	10	14	50		5
32517	12	17	50		5
32518	13	18	50		5
32519	1/4	10	50		5



7244M Power nut driver insert, hex with magnet - style E 6.3.

Material: High-quality chrome vanadium alloy steel, through-hardened, phosphate coated surface.
Drive: DIN 3126, ISO 1173, style E 6.3.
Application: For mechanical fastening and unfastening.
Extra: With a powerful permanent magnet embedded in brass. Rounded hex opening in the corners for protection of the screw heads.

Order-No.	Ø	Ø	Ø	Ø	Ø
32520	5.5	9	50		5
32521	6	10	50		5
32522	7	11	50		5
32523	8	12	50		5
32524	10	14	50		5
32525	12	17	50		5
32526	13	18	50		5
32528	1/4	10	50		5
32530	5/16	12	50		5
32529	3/8	14	50		5
32527	1/2	17	50		5

Machine-operated nut driver inserts.



7204 Power hex nut driver, 1/4" drive.

Material: High-quality chrome-molybdenum steel, through-hardened, phosphate coated surface.
Drive: DIN 3129, ISO 2725-2.
Application: For tightening and loosening hex screws with electric or pneumatic screwdrivers (rotary or impact screwdrivers).
Extra: Rounded hex opening in the corners for protection of the screw heads.

Order-No.	Ø	Ø	Ø	Ø	Ø
32531	5.5	9.4	13	23	1
32532	6	10.0	13	23	1
32533	7	11.3	13	23	1
32534	8	12.5	13	23	1
32535	10	15.0	13	23	1
32536	12	17.5	13	23	1
32537	13	18.8	13	23	1
32538	1/4	10.0	13	23	1
32539	5/16	12.5	13	23	1
32540	3/8	15.0	13	23	1



7204M Power hex nut driver with magnet, 1/4" drive.

Material: High-quality chrome-molybdenum steel, through-hardened, phosphate coated surface.
Drive: DIN 3129, ISO 2725-2.
Application: Mainly for fastening and unfastening in self-tapping sheet metal screws with electric or pneumatic screwdrivers (rotary or impact screwdrivers). The magnet simplifies the guidance of the screws while fastening.
Extra: With a powerful permanent magnet embedded in brass. With 0.03 mm raised cladding in comparison to the standard model for a considerably increased service life. Due to the rounded hex opening, flat screws can easily be gripped.

Order-No.	Ø	Ø	Ø	Ø	Ø
32541	7	11.6	13	23	1
32542	8	12.8	13	25	1
32543	10	15.3	13	28	1
32544	13	19.1	13	30	1
32545	1/4	10.3	13	23	1



7205 Power TORX® nut driver insert, 1/4" drive.

Material: High-quality chrome-molybdenum steel, through-hardened, phosphate coated surface.
Drive: DIN 3129.
Application: For external TORX® screws and self-tapping screws with TORX® head. Suitable for electric or pneumatic screwdrivers (rotary or impact screwdrivers).

Order-No.	Ø	Ø	Ø	Ø	Ø
32550	E6	8.7	13	23	1
32551	E8	9.2	13	23	1
32552	E10	12.2	13	23	1

Wiha adapters.

For nut driver inserts and bits



7210 Tool shaft, style C 6.3.
Suitable for: DIN 3120, ISO 1174, style A 6.3 + A 10.
Drive: DIN 3126, ISO 1173, style C 6.3.
Application: For hand used nut driver sockets.

Order-No.				
01933	1/4	1/4	25	5
04204	3/8	1/4	30	5



7201 Connecting device with retaining ring, style G 6.3 + G 10 + G 12.5.
Suitable for: DIN 3126, ISO 1173, style D 6.3 and D 8.
Drive: DIN 3121, ISO 1174, style G 6.3 + G 10 + G 12.5.
Application: Suitable for bits C 6.3 and C 8.

Order-No.					
01924	1/4	1/4	25	D 6.3	2
01926	1/4	3/8	30	D 6.3	2
01922	1/4	1/2	35	D 6.3	2
01927	5/16	3/8	30	D 8	2
01923	5/16	1/2	35	D 8	2



24637 Power bit holder.
Material: High-quality chrome-molybdenum steel, through-hardened, chrome-plated and polished.
Drive: DIN 3126.
Application: For use of C 6.3 bits.

Order-No.				
33230	1/4	1/4	22	1

For machine used nut driver sockets.



7230 Tool shaft, style A 5.5.
Standards: Adapter DIN 7428.
Suitable for: DIN 3121, ISO 1174, style F 6.3.
Drive: DIN 3126, ISO 1173, style A 5.5.
Application: For machine used nut driver sockets.

Order-No.				
01934	1/4	5.5	50	5



7240 Tool shaft, style E 6.3.
Standards: Adapter DIN 7428.
Suitable for: DIN 3121, ISO 1174, style F 6.3 and F 10.
Drive: DIN 3126, ISO 1173, style E 6.3.
Packaging: Plastic box, reusable and dust repellent.
Application: For machine used nut driver sockets.
Extra: Easily identifiable content with large symbols.

Order-No.				
04685	1/4	1/4	100	5
01935	1/4	1/4	50	5
04684	3/8	1/4	100	5
04362	3/8	1/4	50	5



7280 Tool shaft, style G 7.
Suitable for: DIN 3121, ISO 1174, style F 6.3.
Drive: DIN 3126, ISO 1173, style G 7.
Application: For machine used nut driver sockets.

Order-No.				
01936	1/4	7	75	5

Wiha impact screwdriver assortment.

The complete range.

Impact screwdriver and bits.



7050 5/16" impact screwdriver bits, slotted.
Material: High-quality chrome-molybdenum steel, through-hardened, phosphate coated surface.
Drive: DIN 3126, ISO 1173, style C 8.
Application: For slotted screws for use in impact screwdrivers.
Extra: Especially impact-resistant.

Order-No.					
32561	9	1.6	5/16	32	5
32562	11	1.6	5/16	32	5
32563	14	2.0	5/16	32	5



7051 5/16" impact screwdriver bits, Phillips.
Material: High-quality chrome-molybdenum steel, through-hardened, phosphate coated surface.
Drive: DIN 3126, ISO 1173, style C 8.
Application: For Phillips screws for use in impact screwdrivers.
Extra: Especially impact-resistant.

Order-No.				
32558	PH2	5/16	32	5
32559	PH3	5/16	32	5
32560	PH4	5/16	32	5



7055 5/16" impact screwdriver bits, TORX®.
Material: High-quality chrome-molybdenum steel, through-hardened, phosphate coated surface.
Drive: DIN 3126, ISO 1173, style C 8.
Application: For TORX® screws for use in impact screwdrivers.
Extra: Especially impact-resistant.

Order-No.				
32564	T30	5/16	32	5
32565	T40	5/16	32	5
32566	T45	5/16	32	5
32567	T50	5/16	32	5

Impact screwdriver and bits.



24636 1/2" hand impact screwdriver.
Material: High-quality chrome-molybdenum steel, through-hardened, with hand protection.
Drive: Square 1/2".
Application: For loosening jammed screws or nuts together with the Wiha 5/16" impact bits and holder.
Maximum transmissible torque of up to 200 Nm.
Extra: The insert is hardened and lacquered at the impact end to prevent the chipping of chrome parts or mushroom-shaped deformations.
Note: Can only be used with adapter 72040 (5/16" to 1/2")

Order-No.			
32556	1/2	163	1



7204Z-516 Power bit holder.
Material: High-quality chrome-molybdenum steel, through-hardened, chrome-plated and polished.
Drive: DIN 3120.
Application: For use of C 8 bits.
Required for use with hand impact screwdriver, series 24636.

Order-No.				
32547	5/16	1/2	38	1



24636 B5 1/2" hand impact screwdriver set with 5/16" bits and bit holder, 6 pcs.
Material: High-quality chrome-molybdenum steel, through-hardened, with hand protection.
Drive: Square 1/2", also suitable for 5/16" bits with adapter.
Application: For loosening jammed screws or nuts together with the Wiha 5/16" impact bits and holder.
Maximum transmissible torque of up to 200 Nm.
Extra: The insert is hardened and lacquered at the impact end to prevent the chipping of chrome parts or mushroom-shaped deformations.

Order-No.	Series	
32573	24636 B5	1
	7050	9x1.6 11x1.6
	7051	PH2x5/16 PH3x5/16
	7204Z-516	Bit holder

Wiha Gripper.

Siezes everything

Gripper.



9246 01 Gripper nut driver 3/8".
Material: Housing made from alloyed steel.
54 spring-loaded hardened steel pins.
Drive: DIN 3120, style C 10.
Application: Replaces nuts from 7 mm to 19 mm.
Regardless of whether inch or metric dimensions.
The 54 steel pins fit every nut or screw with an external profile.
For screws up to a heigth of 8 mm.
Extra: The Gripper also works on hooks or eyebolts.
Enables a torque transmission of up to 80 Nm.

Order-No.			
09400	3/8	25.4	53.5
			10

SB 246 01 Gripper nut driver insert, 3/8".
Blister packed.
Material: Housing made from alloyed steel.
54 spring-loaded hardened steel pins.
Drive: DIN 3120, style C 10.
Application: Replaces nuts from 7 mm to 19 mm.
Regardless of whether inch or metric dimensions.
The 54 steel pins fit every nut or screw with an external profile.
For screws up to a heigth of 8 mm.
Extra: The Gripper also works on hooks or eyebolts.
Enables a torque transmission of up to 80 Nm.

Order-No.			
20554	3/8	25.4	53.5
			10

Gripper compact set.



SB 246 02 Gripper compact set, 3 pcs.
Consists of Gripper nut driver, ratchet 3/8" and adapter for portable electric drills.
Blister packed.
Material: Housing made from alloyed steel.
54 spring-loaded hardened steel pins.
Drive: DIN 3120, style C 10.
Content: Gripper nut driver 3/8"
Ratchet 3/8"
Adapter 3/8"
Application: Replaces nuts from 7 mm to 19 mm.
Regardless of whether inch or metric dimensions.
The 54 steel pins fit every nut or screw with an external profile.
For screws up to a heigth of 8 mm.
Extra: The Gripper also works on hooks or eyebolts.
Enables a torque transmission of up to 80 Nm.

Order-No.	Series	
20783	SB 246 02	1
	9246 01	Gripper nut driver 3/8"
	246 05	Ratchet 3/8"
	246 03	Adapter 3/8"

Wiha bit holder

For power machines.



CentroFix, the star of the Wiha bit holders.

It convinces with an unbelievable diversity of application. With its innovative mechanism this bit holder holds all common bit types with 1/4" hexagon drive.

In addition the CentroFix quick release holder enables distinctly easier work for all craftsmen. Because especially on ladders or scaffolding, the CentroFix quick release holder offers added safety and time-saving with real single-handed operation for quick bit changing.

- Wiha bit holder**
- Fits all bits with 1/4" hex drive with styles C6.3 and E6.3
 - Real one-hand application for quick bit change
 - The play between bit and holder is reduced to a minimum, particularly important when drilling
 - Guarantees high retention forces, necessary when drilling wood
 - Slender metal corpus with ergonomically styled, functional sleeve withstands even the greatest stresses when driving screws and drilling



Magic Flip, the universal bit holder.

With its strong Neodym ring magnet it even securely holds heavy screws.

But that's not all it can do. If the screw head is cleanly recessed, then the ring magnet sleeve automatically springs back, allowing a view of the screw head. Users can thus recess the screw further if desired.

Not all applications need the ring magnet function. If desired, the ring magnet can be manually pushed back and in this way deactivated.

- Wiha MagicFlip**
- Especially strong Neodym ring magnet, holding force 16N (approx. 1.6Kg)
 - FlipBack – the ring magnet sleeve automatically springs back during recessing.
 - Magnet On/Off – the ring magnet can be activated or deactivated.
 - Robust 1/4" bit mount, durable steel, with corrosion-resistant surface finish.

Wiha bit holder for power machines.

Drive system style E 6.3.



7148CM CentroFix quick release holder, magnetic, style E 6.3.
Sleeve: Metal, coated.
Suitable for: For bits according to DIN 3126, ISO 1173 style C 6.3 and E 6.3.
Drive: DIN 3126, ISO 1173, style E 6.3.
Packaging: Plastic box, reusable and dust repellent.
Application: Whenever the bit needs a secure and zero-play hold. Optimised for the use of drill bits. Ideal for Torx bits.
Extra: With the unique holding mechanism, this bit holder holds bits with C 6.3 and E 6.3 styles. The play between bit and holder is reduced to a minimum. Real single-handed operation for fast bit exchange.
With strong Neodym magnet.

Order-No.	Ø	⌀	↔	🔩
35386	1/4	1/4	60	10

7148C CentroFix quick release holder, style E 6.3.
Without magnet.

Order-No.	Ø	⌀	↔	🔩
32477	1/4	1/4	60	10



NEW
7123 MagicFlip 1/4" universal holder, magnetic, style E 6.3.
Sleeve: Stainless steel and glass-fibre reinforced plastic
Suitable for: For bits according to DIN 3126, ISO 1173 style C 6.3.
Drive: DIN 3126, ISO 1173, style E 6.3.
Packaging: Plastic box, reusable and dust repellent.
Application: Neodym magnet securely holds screws. For easy fastening of screws.
Extra: With strong Neodym magnet. Magnet On/Off - the ring magnet can be purposefully activated/deactivated according to requirements. FlipBack - the ring magnet sleeve automatically springs back in the last fastening phase, allowing a view of the screw head and enabling precise recessing.

Order-No.	Ø	⌀	↔	🔩
36800	1/4	1/4	71	10



7149 ClicFix quick release holder, magnetic, style E 6.3.
Sleeve: Aluminium anodized.
Suitable for: For bits according to DIN 3126, ISO 1173 style C 6.3.
Drive: DIN 3126, ISO 1173, style E 6.3.
Packaging: Plastic box, reusable and dust repellent.
Application: For applications where the bit must be held tight e.g. assembly lines. Ideal for Torx bits.
Extra: Real single-handed operation for fast bit exchange. With strong Neodym magnet.

Order-No.	Ø	⌀	↔	🔩
24770	1/4	1/4	60	10

Drive system style E 6.3.



7143 Universal holder, magnetic/ retaining ring, style E 6.3.
Sleeve: Stainless steel.
Suitable for: For bits according to DIN 3126, ISO 1173 style C 6.3.
Drive: DIN 3126, ISO 1173, style E 6.3.
Application: For applications where the bit must be held tight e.g. assembly lines.

Order-No.	Ø	⌀	↔	🔩
01913	1/4	1/4	72	10
36092	1/4	1/4	100	5
34306	1/4	1/4	150	5
36093	1/4	1/4	200	5
36094	1/4	1/4	250	5



7142 Universal holder, magnetic/ retaining ring, style E 6.3.
Sleeve: Copper beryllium.
Suitable for: For bits according to DIN 3126, ISO 1173 style C 6.3.
Drive: DIN 3126, ISO 1173, style E 6.3.
Application: Copper-beryllium alloys prevent ignitable sparks and reduce the danger of explosion. Tools made of copper-beryllium are often use in potentially explosive areas.

Order-No.	Ø	⌀	↔	🔩
01912	1/4	1/4	73	10



7140 Universal holder, with retaining ring, style E 6.3.
Suitable for: For bits according to DIN 3126, ISO 1173 style C 6.3.
Drive: DIN 3126, ISO 1173, style E 6.3.
Application: For applications where the bit must be held tight e.g. assembly lines.
Extra: One piece construction.

Order-No.	Ø	⌀	↔	🔩
01910	1/4	1/4	57	10



7110M Universal holder, magnetic, style E 6.3.
Suitable for: For bits according to DIN 3126, ISO 1173 style C 4.
Drive: DIN 3126, ISO 1173, style E 6.3.
Application: Suitable for 4 mm bits, e.g. Wiha 7000-7005 series.
Extra: With magnet.

Order-No.	Ø	⌀	↔	🔩
32505	C4	1/4	60	10

Drive system style E 6.3, G 7 and SDS-Plus®.



7113 Universal holder, magnetic, style E 6.3.
Sleeve: Stainless steel.
Suitable for: For bits according to DIN 3126, ISO 1173 style C 6.3.
Drive: DIN 3126, ISO 1173, style E 6.3.
Packaging: Plastic box, reusable and dust repellent.
Extra: Easily identifiable content with large symbols. With strong Neodym magnet.

Order-No.	Ø	⌀	↔	🔩
01894	1/4	1/4	74	10



7113 S Universal holder, magnetic, style E 6.3.
Sleeve: Stainless steel.
Suitable for: For bits according to DIN 3126, ISO 1173 style C 6.3.
Drive: DIN 3126, ISO 1173, style E 6.3.
Extra: With strong Neodym magnet.

Order-No.	Ø	⌀	↔	🔩
01895	1/4	1/4	58	10



7183 Universal holder, magnetic/ retaining ring, style G 7.
Sleeve: Stainless steel.
Suitable for: For bits according to DIN 3126, ISO 1173 style C 6.3.
Drive: DIN 3126, ISO 1173, style G 7.
Application: For applications where the bit must be held tight e.g. assembly lines.
Extra: With strong Neodym magnet.

Order-No.	Ø	⌀	↔	🔩
01919	1/4	G7	72	10



7180-7 Quick release holder, magnetic, SDS-Plus®.
Suitable for: For bits according to DIN 3126, ISO 1173 style C 6.3.
Drive: SDS-Plus®.
Application: All hammer drills become powerful screwdrivers with this bit holder.
Extra: With strong Neodym magnet.

Order-No.	Ø	⌀	↔	🔩
26255	1/4	SDS-Plus®	100	10

Bit holder sales counter display.



NEW
7149 VB06 Bit holder display.
Acrylic glass display with 30 pieces.

Order-No.	
36161	Acrylic glass display with 30 pieces.
7149	10 x ClicFix quick release holder, magnetic, style E 6.3.
7113 S	10 x Universal holder, magnetic, style E 6.3.
7143	5 x Universal holder. magnetic. style E 6.3.1/4
7148 CM	5 x CentroFix quick release holder, magnetic, style E 6.3.

NEW
7123 VB1 MagicFlip display, 30-pcs.
Acrylic glass display with 30 pieces.

Order-No.	
36930	Acrylic glass display with 30 pieces.
7123	30 x MagicFlip Universal holder. magnetic. style E 6.3.



NEW
7143 VB1 Bit holder display.
Acrylic glass display with 70 pieces.

Order-No.	
36384	Acrylic glass display with 70 pieces.
7113 S	20 x Universal holder. magnetic. style E 6.3
7113	20 x Universal holder. magnetic. style E 6.3
7143100	10 x Universal holder. magnetic. style E 6.3
7143150	10 x Universal holder. magnetic. style E 6.3
7143200	10x Universal holder. magnetic. style E 6.3

Wiha bit holder with handle.

Bit holder 1/4".



384 **Bit holder with handle, magnetic, 1/4".**
Blade: Chrome-vanadium steel, through hardened, nickel-plated.
Handle: Wiha SoftFinish® multi-component handle with roll-off protection.
Bit holder: Stainless steel with strong magnet.
Suitable for: For bits according to DIN 3126, ISO 1173 style C 6.3.

Order-No.	Ø	↔	↔	↕	↔
01475	1/4	125	225	36	10
01476	1/4	300	400	36	5



386 **Bit holder with handle, flexible shaft, 1/4".**
Blade: Plastic coated flexible metal.
Handle: Wiha SoftFinish® multi-component handle with roll-off protection.
Bit holder: With retaining ring.
Suitable for: For bits according to DIN 3126, ISO 1173 style C 6.3.
Application: For offset screws.

Order-No.	Ø	↔	↔	↕	↔
01479	1/4	150	268	36	10



387 **Bit holder with handle, quick release holder, 1/4".**
Handle: Wiha SoftFinish® multi-component handle with roll-off protection.
Bit holder: ClicFix quick release holder, magnetic.
Suitable for: For bits according to DIN 3126, ISO 1173 style C 6.3.
Application: Compact, handy style for working in confined spaces. For applications where the bit must be held tight.

Order-No.	Ø	↔	↔	↕	↔
25874	1/4	35	146	30	10



281-02 **Bit holder with handle, magnetic, 1/4".**
Handle: Wiha SoftFinish® multi-component handle with roll-off protection.
Bit holder: Stainless steel with strong magnet.
Suitable for: For bits according to DIN 3126, ISO 1173 style C 6.3 and E 6.3.
Application: Compact screwdriver together with bits, 1/4". Together with Wiha countersink bits, can be used as manual deburrer.

Order-No.	Ø	↔	↕	↔
32160	1/4	125	36	1

Bit holder 1/4".



281 01 **Bit holder with handle, magnetic, 1/4".**
Handle: Ergonomic Wiha Stubby SoftFinish® handle, multi-component with roll-off protection.
Bit holder: Stainless steel with strong magnet.
Suitable for: For bits according to DIN 3126, ISO 1173 style C 6.3.
Application: For working in confined spaces.
Extra: Together with Wiha countersink bits, can be used as manual deburrer.

Order-No.	Ø	↔	↕	↔
29463	1/4	57	34	10



281-01ESD **ESD bit holder with handle, retaining ring, 1/4".**
Dissipative handle, ESD-safe.
Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.
Surface resistance 10⁶ - 10⁹ ohms.
Universal use for all bits.
Handle: IEC 61340-5-1.
Output: For bits according to DIN 3126, ISO1173 style C 6.3.
Bit holder: Stainless steel with retaining ring.
Application: For working on electrostatically sensitive components, especially in tight places.

Order-No.	Ø	↔	↕	↔
32484	1/4	57	34	10



387ESD **ESD bit holder with handle, quick release holder, 1/4".**
Dissipative handle, ESD-safe.
Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.
Surface resistance 10⁶ - 10⁹ ohms.
Standards: Handle: IEC 61340-5-1.
Output: For bits according to DIN 3126, ISO1173 style C 6.3, E 6.3 and double bits.
Input: DIN 3126, ISO 1173, style E 6.3.
Bit holder: Stainless steel with retaining ring.
Application: For working on electrostatically sensitive components. With integrated CentroFix bit holder, suitable for all bits and bit drills with the style C 6.3, E 6.3 or double bits.
Extra: True single-handed operation, extremely high retention force of bits (up to 20 kg) and virtually no play between bit and holder thanks to special closing and holding mechanism.

Order-No.	Ø	↔	↔	↕	↔
32161	1/4	38	148	30	10

Bit holder 1/4".



388 **Bit holder with handle, magnetic, 1/4".**
Blade: Chrome-vanadium steel, through hardened, nickel-plated.
Handle: Wiha Classic T-handle.
Bit holder: Stainless steel with strong magnet.
Suitable for: For bits according to DIN 3126, ISO 1173 style C 6.3.
Application: For high torques.

Order-No.	Ø	↔	↕	↔
01481	1/4	150	80	10



388DS **Bit holder with handle, magnetic, 1/4".**
Blade: Chrome-vanadium steel, through hardened, nickel-plated.
Handle: Wiha ComfortGrip multi-component T-handle.
Bit holder: Stainless steel with strong magnet.
Suitable for: For bits according to DIN 3126, ISO 1173 style C 6.3.
Application: For high torques.
Extra: Two bit holders for 1/4" bits make this a universal tool. Bit holder on the side for particularly high torque.

Order-No.	Ø	↔	↕	↔
26179	1/4	150	100	10

Offset screwdriver.



SB24628 **High-performance offset screwdriver with a 105° angled head.**
Blister packed.
Suitable for: For bits according to DIN 3126, ISO 1173 style C 6.3 and E 6.3.
Material: Steel housing, chrome-plated.
Application: For use in almost any (battery-powered) screwdriver; ideal for drilling and fastening/unfastening in hard-to-reach places, corners and edges.
Extra: A hand-operated locking sleeve ensures an optimal hold of all 1/4" inserts such as bits, drill bits and countersink bits. Stabilisation arm, adjustable in 48 positions; torque transmission up to 57 Nm. Compact, slim design.

Order-No.	Ø	↕	↔	↔
32310	1/4	1/4	165	1



SB24629 **Offset screwdriver with a 105° angled head, magnetic.**
Blister packed.
Suitable for: For bits according to DIN 3126, ISO 1173 style C 6.3 and E 6.3.
Material: Die cast housing, chrome-plated.
Application: For use in battery-powered and hand-held screwdrivers; ideal for drilling and fastening in hard-to-reach places, corners and edges.
Extra: Stabilisation arm, adjustable in 12 positions; torque transmission up to 14 Nm. Compact, slim design.

Order-No.	Ø	↕	↔	↔
32311	1/4	1/4	130	1

Wiha magazine bit holder.

Everything in the palm of your hand.



reddot design award
best of the best 2008



Wiha magazine bit holder telescopic.

The Wiha magazine bit holder is ideal for all users needing several screw or screwdriver types for work within a short space of time. Thanks to its compact size it fits into every toolbox. The ergonomically designed handle of soft, skin-friendly material guarantees comfortable handling as well. This new solution for storing and extracting bits has already convinced juries of experts, winning the coveted "red dot design award: best of the best".

Small format – great professional quality: the Wiha Stubby magazine bit holder features a clever magazine for accommodating six bits. With the short-length, ergonomic Wiha SoftFinish® multi-component handle it allows comfortable working in confined places.

Wiha magazine bit holder.

- Unique fold-out mechanism
- Eight screwdrivers in one – for timesaving, effective working
- Magnetic fixing function
- Ergonomic SoftFinish® zone
- Handy & compact



The bit magazine accommodated by the handle is swung open with a light press of the thumb. The bits can then be quickly and simply changed.


Wiha magazine bit holder Stubby.

- Gets everywhere
- Has six bits in the cap
- Fits perfectly in your hand
- Professional quality Made in Germany
- Ideal for professional work in confined spaces



Handy, compact and particularly suitable for working in confined spaces.

- Eight profiles in one screwdriver. With integrated, swivelling bit magazine
- Adjustable blade length from 50 - 85 mm. ClickStop ball clamp for secure hold and quick length adjustment
- ClicFix quick release holder, magnetic
- Adapter blade also suitable for use in battery-powered screwdrivers



ClicFix magazine bit holder, telescopic.



- NEW**
380928401 Magazine bit holder ClicFix, magnetic, 1/4", telescopic.
- Blade: High-quality chrome-molybdenum steel, through-hardened, chrome-plated.
Adjustable blade length from 50 – 85 mm
- Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.
with integrated, swivelling bit magazine.
With 6 mm hexagonal chuck for System 6-blades.
ClickStop ball clamp for a secure hold and quick length adjustment.
- Bit holder: ClicFix quick release holder, magnetic.
Real single-handed operation for fast bit changing.
- Suitable for: DIN 3126, ISO 1173, style D 6.3.
- Bits: 27 mm universal bits
- Application: Eight drive shapes in one screwdriver.
When a normal screwdriver is too long.
Adapter blade also suitable for use in power screwdrivers

Order-No.	Series	
36394	380928401	5
①	7010 Z	1x5.5
⊕	7011 Z	1xPH1 1xPH2
⊕	7012 Z	1xPZ1 1xPZ2
⊕	7015 Z	1xT15 1xT20 1xT25
	284949	SYSTEM 6 ClicFix adapter blade

- NEW**
SB380928401 Magazine bit holder ClicFix, magnetic, 1/4", telescopic..
Blister packed.

Order-No.	Series	
36932	SB380928401	5
①	7010 Z	1x5.5
⊕	7011 Z	1xPH1 1xPH2
⊕	7012 Z	1xPZ1 1xPZ2
⊕	7015 Z	1xT15 1xT20 1xT25
	284949	SYSTEM 6 ClicFix adapter blade

ClicFix magazine bit holder, telescopic.



- NEW**
380928403 Magazine bit holder ClicFix, magnetic, 1/4", telescopic.
- Blade: High-quality chrome-molybdenum steel, through-hardened, chrome-plated.
Adjustable blade length from 50 – 85 mm
- Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.
with integrated, swivelling bit magazine.
With 6 mm hexagonal chuck for System 6-blades.
ClickStop ball clamp for a secure hold and quick length adjustment.
- Bit holder: ClicFix quick release holder, magnetic.
Real single-handed operation for fast bit changing.
- Suitable for: DIN 3126, ISO 1173, style D 6.3.
- Bits: 27 mm universal bits
- Application: Eight drive shapes in one screwdriver.
When a normal screwdriver is too long.
Adapter blade also suitable for use in power screwdrivers

Order-No.	Series	
36395	380928403	5
①	7010 Z	1x6.5
⊕	7011 Z	1xPH1 1xPH2 1xPH3
⊕	7012 Z	1xPZ1 1xPZ2 1xPZ3
	284949	SYSTEM 6 ClicFix adapter blade

- NEW**
SB380928403 Magazine bit holder ClicFix, magnetic, 1/4", telescopic.
Blister packed.

Order-No.	Series	
36933	SB380928403	5
①	7010 Z	1x6.5
⊕	7011 Z	1xPH1 1xPH2 1xPH3
⊕	7012 Z	1xPZ1 0xPZ2 1xPZ3
	284949	SYSTEM 6 ClicFix adapter blade



- NEW**
284949 System6 ClicFix adapter blade, short
Suitable for blades.

Blade: Chrome-vanadium steel, through hardened, chrome-plated.
Design: ClicFix mechanism.

Order-No.	①	1/4	102	5
36393				

Wiha magazine bit holder.

Eight screwdrivers in one.

Magazine bit holder 1/4", magnetic.



38090101 Magazine bit holder, magnetic, 1/4".
Blade: High grade chrome-vanadium steel, through hardened.
Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.
Bit holder: Stainless steel with strong magnet.
Suitable for: DIN 3126, ISO 1173, style D 6.3.
Bits: 25 mm Standard bits.
Application: The alternative to a screwdriver set.
Eight drive shapes in one screwdriver.

Order-No.	Series				
32901	38090101				5
⌚	7010 Z	1x6.5			
⊕	7011 Z	1xPH1	1xPH2	1xPH3	
⊕	7012 Z	1xPZ2			
⊕	7015 Z	1xT15	1xT20	1xT25	

SB 38090101 Magazine bit holder, magnetic, 1/4".
Blister packed.

Order-No.	Series				
33007	SB 38090101				5



NEW
3809 VH01 Magazine bit holder display.
Card display with 8 pieces.

Order-No.	Content				
36167					1
⌚ ⊕ ⊕ ⊕	2 x 38090101	Magazin bit holder			
⌚ ⊕	6 x 380101	Magazin bit holder Stubby			

Magazine bit holder 1/4", magnetic.



Order-No.	Series				
32902	38090102				5
⊕	7015 Z	1xT6	1xT8	1xT10	1xT15
		1xT20	1xT25	1xT30	1xT40

SB 38090102 Magazine bit holder, magnetic, 1/4".
Blister packed.

Order-No.	Series				
33008	SB 38090102				5



Order-No.	Series				
32903	38090103				5
⌚	7010 Z	1x5.5	1x6.5		
⊕	7011 Z	1xPH1	3xPH2	2xPH3	

SB 38090103 Magazine bit holder, magnetic, 1/4".
Blister packed.

Order-No.	Series				
33009	SB 38090103				5



Order-No.	Series				
32904	38090104				5
⌚	7010 Z	1x5.5	1x6.5		
⊕	7012 Z	1xPZ1	3xPZ2	2xPZ3	

SB 38090104 Magazine bit holder, magnetic, 1/4".
Blister packed.

Order-No.	Series				
33010	SB 38090104				5

Wiha magazine bit holder stubby.

The Stubby with six bits in its cap.

Magazine bit holder 1/4", magnetic.



380101 Magazine bit holder Stubby, magnetic, 1/4".
Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.
Bit holder: Stainless steel with strong magnet.
Suitable for: DIN 3126, ISO 1173, style D 6.3.
Bits: 25 mm Standard bits.
Application: The alternative to a screwdriver set.
Six drive shapes in one screwdriver.
For working in confined spaces.

Order-No.	Series				
33736	380101				10
⌚	7010 Z	1x4.5	1x6.5	1x8.0	
⊕	7011 Z	1xPH1	1xPH2	1xPH3	

SB 380101 Magazine bit holder Stubby, magnetic, 1/4".
Blister packed.

Order-No.	Series				
33738	SB 380101				10



380... VH Stubby magazine bit holder display.
Card display with 10 pieces.

Order-No.	Art.-Nr.	Content		
33739	380101 VH	10 x 380101	⌚ ⊕	1
33742	380102 VH	10 x 380102	⊕ ⊕	1
33745	380103 VH	10 x 380103	⊕	1
33747	380101 VH	10 x 380104	⌚ ⊕	1

Magazine bit holder 1/4", magnetic.



Order-No.	Series				
33740	380102				10
⊕	7011 Z	1xPH1	1xPH2	1xPH3	
⊕	7012 Z	1xPZ1	1xPZ2	1xPZ3	

SB 380102 Magazine bit holder Stubby, magnetic, 1/4".
Blister packed.

Order-No.	Series				
33741	SB 380102				10



Order-No.	Series				
33743	380103				10
⊕	7015 Z	1xT10	1xT15	1xT20	
		1xT25	1xT30	1xT40	

SB 380103 Magazine bit holder Stubby, magnetic, 1/4".
Blister packed.

Order-No.	Series				
33744	SB 380103				10



Order-No.	Series				
33764	380104				10
⌚	7010 Z	1x4.5	1x6.5	1x8.0	
⊕	7012 Z	1xPZ1	1xPZ2	1xPZ3	

SB 380104 Magazine bit holder Stubby, magnetic, 1/4".
Blister packed.

Order-No.	Series				
33746	SB 380104				10

Wiha BitBuddy.


Maximum efficiency by direct insert of bits.



No hand free? And which bit has the profile you need? The Wiha BitBuddy eliminates such day-to-day problems when changing bits, because the new bit box does the work more efficiently and quickly than ever before. With consistent single-hand operation and according to the simple principle: "Plug-Work-Store"

Push the Wiha logo a little, and the torsion bits are ready for inserting in the bit holder! The profile type is additionally lasered to the bit base and can thus be instantly identified. The innovative terminal block with push buttons accommodates the bits securely later.

Tried-and-proven as ever: compact dimensions and the Wiha box design tried and tested a million times also characterise the new BitBuddy. It's always ready to use on a ladder, on the ground or below the ceiling.

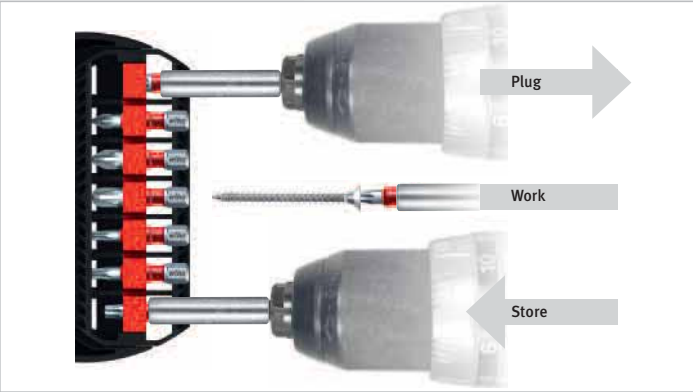

The BitBuddy is available with the 29-series and 49-series assortment of new Maxx torsion bits.

Plug-Work-Store: BitBuddy makes changing bits wonderfully simple.

BitBuddy is always with you in the belt clip.



Belt clip suitable for both boxes. Buddy always fits - in every position!
- Open box
- Closed box
- Front
- Rear

Wiha BitBuddy.

- The Wiha BitBuddy.
- Consistent single-handed operation: simple opening and bit changing
- Creates order: all bits always in view
- Always at hand in the belt clip
- Compact box design tried and tested a million times
- Robust, impact resistant polyamide

BitBuddy 29 series.



NEW
7945-303

BitBuddy 29, hexagon, 8-pcs.

Housing: Box of impact resistant, glass-fibre reinforced polyamide - permanently robust.
Bit clamping element with push buttons, 180° rotation.
Extra folding element for the magnetic bit holder.

Bits: 31-series MaxxTor bits.

Geometry: Maximum length torsion zone individually matched to the profile.
Precision-milled profile for perfect fit and maximum performance.

Holder: Universal holder 1/4", magnetic - ideal for rapid bit changing.

Application: Compact bit box with the most common bits. Ideal for frequently varying fastening applications within one work sector.
Push the Wiha logo slightly, and the bits are ready to be inserted into the bit holder!
Plug & Work & Store - Maximum efficiency due to direct bit insertion without any problems. Insert, work, store.

Extra: Design tried and tested a million times
Always ready to use - easily fits into trouser pockets or the belt clip.

Order-No.	Series	
36919	7945-303	5
	7113 S	Universal holder, magnetic, style E 6.3.
	7013 M9T	2x3.0 2x4.0 2x5.0 1x6.0

NEW
SB7945-303

BitBuddy 29, hexagon, 8-pcs.
With belt clip.
Blister packed for hanging.

Order-No.	Series	
36934	SB7945-303	5

BitBuddy 29 series.



NEW
7945-505

BitBuddy 29, Torx®, 8-pcs.

Order-No.	Series	
36920	7945-505	5
	7113 S	Universal holder, magnetic, style E 6.3.
	7015 M9T	1xT10 1xT15 2xT20 1xT25 1xT30 1xT40

SB7945-505 **BitBuddy 29, Torx®, 8-pcs.**
With belt clip.
Blister packed for hanging.

Order-No.	Series	
36935	SB7945-505	5



NEW
7945-903

BitBuddy 29, mixed, 8-pcs.

Order-No.	Series	
36921	7945-903	5
	7113 S	Universal holder, magnetic, style E 6.3.
	7011 M9T	1xPH2
	7012 M9T	1xPZ1 1xPZ2 1xPZ3
	7015 M9T	1xT15 1xT20 1xT25

NEW
SB7945-903

BitBuddy 29, mixed, 8-pcs.
With belt clip.
Blister packed for hanging.

Order-No.	Series	
36936	SB7945-903	5

Wiha BitBuddy.

Maximum efficiency by direct insert of bits.

BitBuddy 29 series.



NEW
7945-904 BitBuddy 29, mixed, 8-pcs.

Order-No.	Series						
36922	7945-904						5
	7113 S	Universal holder, magnetic, style E 6.3.					
⊕	7011 M9T	1xPH2					
⊕	7012 M9T	1xPZ1		1xPZ2			
⊕	7015 M9T	1xT10		1xT15		1xT20	1xT25

NEW
SB7945-904 BitBuddy 29, mixed, 8-pcs.
With belt clip.
Blister packed for hanging.

Order-No.	Series						
36937	SB7945-904						5



NEW
7945-905 BitBuddy 29, mixed, 8-pcs.

Order-No.	Series							
36923	7945-905							5
	7113 S	Universal holder, magnetic, style E 6.3.						
⊕	7012 M9T	1xPZ1		1xPZ2				
⊕	7015 M9T	1xT15		1xT20		1xT25	1xT30	1xT40

NEW
SB7945-905 BitBuddy 29, mixed, 8-pcs.
With belt clip.
Blister packed for hanging.

Order-No.	Series						
36938	SB7945-905						5

BitBuddy 49 series. Belt clip.



NEW
7946-303 BitBuddy 49, hexagon, 7-pcs.
Housing: Box of impact resistant, glass-fibre reinforced polyamide - permanently robust.
Bit clamping element with push buttons.
Bits: 49er MaxxTor bits.
Geometry: Length torsion zone individually matched to the profile.
Precision-milled profile for perfect fit and maximum performance.
Application: Compact bit box with the most common bits. Ideal for frequently varying fastening applications within one work sector.
Innovative operating concept enables consistent single-handed operation.
Push the Wiha logo slightly, and the bits are ready to be inserted into the bit holder!
Plug & Work & Store - Maximum efficiency due to direct bit insertion without any problems. Insert, work, store.
Extra: Always ready to use - easily fits into trouser pockets or the belt clip.

Order-No.	Series					
36924	7946-303					5
⊕	7043 M9T	2x3.0	2x4.0	2x5.0	1x6.0	

NEW
SB7946-303 BitBuddy 49, hexagon, 7-pcs.
With belt clip.
Blister packed for hanging.

Order-No.	Series						
36939	SB7946-303						5



NEW
7945 Belt clip for BitBuddy.
Suitable for Buddy 29 and Buddy 49.

Material: High quality, impact resistant plastic.

Order-No.	Series						
36990							10

BitBuddy 49 series.



NEW
7946-505 BitBuddy 49, Torx®, 7-pcs.

Order-No.	Series					
36925	7946-505					5
⊕	7045 M9T	1xT10	1xT15	2xT20		
		1xT25	1xT30	1xT40		

NEW
SB7946-505 BitBuddy 49, Torx®, 7-pcs.
With belt clip.
Blister packed for hanging.

Order-No.	Series						
36940	SB7946-505						5



NEW
7946-903 BitBuddy 49, mixed, 7-pcs.

Order-No.	Series					
36926	7946-903					5
⊕	7041 M9T	1xPH2				
⊕	7042 M9T	1xPZ1	1xPZ2	1xPZ3		
⊕	7045 M9T	1xT15	1xT20	1xT25		

NEW
SB7946-903 BitBuddy 49, mixed, 7-pcs.
With belt clip.
Blister packed for hanging.

Order-No.	Series						
36941	SB7946-903						5

BitBuddy 49 series.



NEW
7946-904 BitBuddy 49, mixed, 7-pcs.

Order-No.	Series						
36927	7946-904						5
⊕	7041 M9T	1xPH2					
⊕	7042 M9T	1xPZ1		1xPZ2			
⊕	7045 M9T	1xT10	1xT15	1xT20	1xT25		

NEW
SB7946-904 BitBuddy 49, mixed, 7-pcs.
With belt clip.
Blister packed for hanging.

Order-No.	Series						
36942	SB7946-904						



NEW
7946-905 BitBuddy 49, mixed, 7-pcs.

Order-No.	Series					
36928	7946-905					5
⊕	7042 M9T	1xPZ2	1xPZ3			
⊕	7045 M9T	1xT15	1xT20	1xT25		
		1xT30	1xT40			

NEW
SB7946-905 BitBuddy 49, mixed, 7-pcs.
With belt clip.
Blister packed for hanging.

Order-No.	Series						
36943	SB7946-905						

Wiha XSelector and XLSelector.

Couldn't be smaller!



The range of Wiha bit selectors is distinguished by incredible compactness and ingeniously simple bit removal.

With the 31-piece XLSelector and the 11-piece XSelector, Wiha offers an optimum range that has been tailored to user requirements.

The proven colour-coding system facilitates identification of the various bit qualities.



The XLSelector is extremely flat and compact and fits in every case.
The Wiha XSelector: bit removal couldn't be easier.



Protector with System Loop: for attaching the 11-piece XSelector to a belt or for wall-mounting.

Wiha XLSelector.

- Extremely flat and compact bit box, stocked with 30 bits and bit holder
- Bit box with soft zones for a non-slip grip and comfortable handling
- Removal of the bits couldn't be easier
- With dimensions of just 135 x 80 x 17.5 mm, it even fits into a shirt or trouser pocket
- Due to its compactness, it's ideal for storing in a toolbox

Wiha XSelector:

- Compact, smart, tidy!
- Equipped with 10 bits and bit holder
- Ingeniously simple bit removal via integrated bit clamp
- With dimensions of just 75 x 53 x 15 mm, it fits in every shirt or trouser pocket
- Together with the Protector, can be attached to a belt

ZOT Torsion and Security bits.



7948-005 XLSelector Standard, mixed, 31 pcs.

Housing: Box made of high quality plastic. The simplest bit removal guaranteed.

Bits: 25 mm Standard bits.

Holder: Universal holder, magnetic.

Application: All types of fastenings for trade and industry – it can't get any more compact!

Extra: Soft zones for maximum working comfort.

Order-No.	Series				
29417	7948-005				5
①	7010 Z	1x4.5	1x5.5	1x6.5	
⊕	7011 Z	2xPH1	4xPH2	1xPH3	
⊕	7012 Z	2xPZ1	5xPZ2	1xPZ3	
⊗	7015 Z	2xT10	2xT15	2xT20	
		3xT25	2xT30	1xT40	
	7113 S	Universal holder, magnetic, style E 6.3.			



7948-927 XLSelector Standard, Security, 31 pcs.

Housing: Box made of high quality plastic. The simplest bit removal guaranteed.

Bits: 25 mm ZOT Torsion and Standard bits.

Holder: ClicFix quick release holder, magnetic.

Application: All types of fastenings for trade and industry – it can't get any more compact!

Extra: Soft zones for maximum working comfort. Bits for popular security screws.

Order-No.	Series					
29416	7948-927	5				
	7019 ZOT TW	1x0	1x1	1x2		
		1x3	1x4			
	7019 Z SP	1x4	1x6	1x8		1x10
		7013 Z TR	1xTR2.0	1xTR2.5		
	1xTR4.0		1xTR5.0	1xTR6.0		
	7019 ZOT TS	1x6	1x8	1x10		
		7015 Z TR	1xT8H	1xT9H		1xT10H
	1xT15H		1xT20H	1xT25H		
		1xT27H	1xT30H	1xT40H		
	7018 Z	1x1	1x2	1x3		
		7149	ClicFix quick release holder, magnetic, style E 6.3.			

Standard and torsion bits.



7948-047 XLSelector Torsion, mixed, 31 pcs.

Housing: Box made of high quality plastic. The simplest bit removal guaranteed.

Bits: 25 mm ZOT Torsion and Standard bits.

Geometry: Patented torsion zone to prevent premature breaking of the bit when under stress.

Holder: ClicFix quick release holder, magnetic.

Application: Especially suitable for fastenings in metal and hard materials – it can't get any more compact!

Extra: Soft zones for maximum working comfort.

Order-No.	Series				
29415	7948-047				5
①	7010 ZOT	1x5.5	1x6.5	1x8.0	
⊕	7011 ZOT	2xPH1	5xPH2	2xPH3	
⊕	7012 ZOT	2xPZ1	5xPZ2	2xPZ3	
●	7013 Z	1x4.0	1x5.0	1x6.0	
⊗	7015 ZOT	1xT10	1xT15	1xT20	
		1xT25	1xT30	1xT40	
	7149	ClicFix quick release holder, magnetic, style E 6.3.			



7948-928 XLSelector Torsion Professional, mixed, 13-pcs.

Housing: Box made of high quality plastic. The simplest bit removal guaranteed.

Bits: 52 mm ZOT Torsion and Professional bits.

Holder: CentroFix quick release holder, magnetic, style E 6.3.

Application: Especially suitable for fastenings in metal and hard materials – it can't get any more compact!

Extra: Soft zones for maximum working comfort.

Order-No.	Series					
33663	7948-928	5				
⊕	7041 ZOT	1xPH1	1xPH2	1xPH3		
⊕	7042 ZOT	1xPZ1	1xPZ2	1xPZ3		
⊕	7045 Z	1xT10	1xT15	1xT20		1xT25
	7148 C	CentroFix quick release holder, style E 6.3.				

Wiha XSelector and XLSelector.

Couldn't be smaller!

XSelector sales counter display.



NEW
7948 VB1 XSelector display.
Acrylic glass display with 6 pieces.

Order-No.				
29541	Acrylic glass display with 6 pieces.			
①	7010 Z	1x4.5	1x5.5	1x6.5
⊕	7011 Z	2xPH1	4xPH2	1xPH3
⊕	7012 Z	2xPZ1	5xPZ2	1xPZ3
⊗	7015 Z	2xT10	2xT15	2xT20
		3xT25	2xT30	1xT40
	7113 S	Universal holder, magnetic, style E 6.3.		



NEW
7948 VB2 XSelector display.
Acrylic glass display with 6 pieces.

Order-No.				
36165	Acrylic glass display with 6 pieces.			
⊗	7015 Z	2xT10	2xT15	3xT20
		4xT25	2xT30	2xT40
	7113 S	Universal holder, magnetic, style E 6.3.		
⊕	7012 HOT	3xPZ1	10xPZ2	2xPZ3



NEW
7948 VB3 XSelector display.
Acrylic glass display with 6 pieces.

Order-No.				
36166	Acrylic glass display with 6 pieces.			
	7148 C	CentroFix quick release holder, style E 6.3.		
⊕	7041 ZOT	1xPH1	1xPH2	1xPH3
⊕	7042 ZOT	1xPZ1	1xPZ2	1xPZ3
⊕	7045 Z	1xT10	1xT15	1xT20
		1xT25	1xT40	

XLSelector with bit ratchet.



NEW
7948043 XLSelector Torsion, mixed, with 1/4" bit ratchet, 17-pcs.
Housing: Box made of high quality plastic.
Highly simple bit and ratchet removal is guaranteed.
Bits: 27 mm Z and ZOT bits.
Geometry: Patented torsion zone to prevent premature breaking of the bit when under stress.
Holder: 1/4" universal holder, magnetic.
Application: Universal assortment for all types of fastening in trade and industry.
More applications with practical bit ratchet.
Extra: 1/4" universal holder can be used as an extension.

Order-No.	Series					
36951	7948043					5
⊕	7011 ZOT	1xPH1	1xPH2			
⊕	7012 ZOT	1xPZ1	1xPZ2	1xPZ3		
⊕	7015 ZOT	1xT10	1xT15	1xT20		
		1xT25	1xT30	1xT40		
⊕	7013 Z	1x3.0	1x4.0	1x5.0	1x6.0	
	SB2463001	1/4" bit ratchet, with thumb wheel.				
	7113 S	Universal holder, magnetic, style E 6.3.				



NEW
7948 VB4 XLSelector with bit ratchet, display, 6-pcs.
Acrylic glass display with 6 pieces.

Order-No.	Content	
36929	6 x 7948043	1

DuraBits with torsion zone.



7944-0DR7 XSelector Dura, mixed, 11 pcs.
Housing: Box made of high quality plastic.
The simplest bit removal guaranteed.
Bits: 25 mm DuraBits with torsion zone.
Extremely wear-resistant Dura tip with hard-metal coating grips into the screw head and prevents the bit from slipping.
Geometry: Patented torsion zone to prevent premature breaking of the bit when under stress.
Coating: Hard-metal coating, extremely wear-resistant.
Holder: ClicFix quick release holder, magnetic.
Application: Bits for fatigue-free, safe work in demanding industrial applications and for sensitive surfaces – it can't get any more compact!

Order-No.	Series				
26974	7944-0DR7	10			
①	7010 DR	1x5.5	1x6.5		
⊕	7011 DR	1xPH1	2xPH2	1xPH3	
⊕	7012 DR	1xPZ1	2xPZ2	1xPZ3	
	7149	ClicFix quick release holder, magnetic, style E 6.3.			

SB7944-0DR7 XSelector Dura, mixed, 11 pcs.
Blister packed.

Order-No.	Series	
27000	SB7944-0DR7	10



7944-9DR7 XSelector Dura, mixed, 11 pcs.

Order-No.	Series					
26975	7944-9DR7					10
⊕	7012 DR	1xPZ1	2xPZ2	2xPZ3		
⊕	7015 DR	1xT15	1xT20	1xT25	1xT30	1xT40
	7149	ClicFix quick release holder, magnetic, style E 6.3.				

SB7944-9DR7 XSelector Dura, mixed, 11 pcs.
Blister packed.

Order-No.	Series	
27001	SB7944-9DR7	10

Diamond bits and TiN Torsion bits.



7944-0D7 XSelector Diamond, mixed, 11 pcs.
Bits: 25 mm Diamond Torsion bits.
Geometry: Patented torsion zone to prevent premature breaking of the bit when under stress.
Coating: Extremely wear-resistant diamond-sapphire coating with a long service life.
Holder: ClicFix quick release holder, magnetic.
Application: Bits for fatigue-free work; bits ideal for frequent fastening – it can't get any more compact!

Order-No.	Series					
26976	7944-0D7				10	
①	7010 D	1x5.5	1x6.5			
⊕	7011 D	1xPH1	2xPH2	1xPH3		
⊕	7012 D	1xPZ1	2xPZ2	1xPZ3		
	7149	ClicFix quick release holder, magnetic, style E 6.3.				

SB7944-0D7 XSelector Diamond, mixed, 11 pcs.
Blister packed.

Order-No.	Series	
27002	SB7944-0D7	10



7944-065 XSelector TiN, mixed, 11 pcs.
Bits: 25 mm TiN Torsion bits.
Geometry: Patented torsion zone to prevent premature breaking of the bit when under stress.
Coating: TiN coating, extends the tool life.
Holder: Universal holder, magnetic.
Application: Bits for trade and industry, especially with series connections – it can't get any more compact!

Order-No.	Series				
26977	7944-065	10			
①	7010 TiN	1x5.5	1x6.5		
⊕	7011 TiN	1xPH1	2xPH2	1xPH3	
⊕	7012 TiN	1xPZ1	2xPZ2	1xPZ3	
○	7113 S	Universal holder, magnetic, style E 6.3.			

SB7944-065 XSelector TiN, mixed, 11 pcs.
Blister packed.

Order-No.	Series	
27003	SB7944-065	10

Wiha XSelector.

Couldn't be smaller!

ZOT Torsion bits.



7944-045 XSelector Torsion, mixed, 11 pcs.
Housing: Box made of high quality plastic.
The simplest bit removal guaranteed.
Bits: 25 mm ZOT Torsion bits.
Geometry: Patented torsion zone to prevent premature breaking of the bit when under stress.
Holder: Universal holder, magnetic.
Application: Especially suitable for fastenings in metal and hard materials – it can't get any more compact!

Order-No.	Series				
26978	7944-045				10
⓪	7010 ZOT	1x5.5	1x6.5		
⊕	7011 ZOT	1xPH1	2xPH2	1xPH3	
⊕	7012 ZOT	1xPZ1	2xPZ2	1xPZ3	
	7113 S	Universal holder, magnetic, style E 6.3.			

SB7944-045 XSelector Torsion, mixed, 11 pcs.
Blister packed.

Order-No.	Series	
27004	SB7944-045	10



7944-145 XSelector Torsion, Phillips, 11 pcs.
Housing: Box made of high quality plastic.
The simplest bit removal guaranteed.
Bits: 25 mm ZOT Torsion bits.
Geometry: Patented torsion zone to prevent premature breaking of the bit when under stress.
Holder: Universal holder, magnetic.
Application: Especially suitable for fastenings in metal and hard materials – it can't get any more compact!

Order-No.	Series				
26979	7944-145				10
⊕	7011 ZOT	2xPH1	6xPH2	2xPH3	
	7113 S	Universal holder, magnetic, style E 6.3.			

ZOT Torsion bits and HOT Torsion bits.



7944-245 XSelector Torsion, Pozidriv, 11 pcs.
Housing: Box made of high quality plastic.
The simplest bit removal guaranteed.
Bits: 25 mm ZOT Torsion bits.
Geometry: Patented torsion zone to prevent premature breaking of the bit when under stress.
Holder: Universal holder, magnetic.
Application: Especially suitable for fastenings in metal and hard materials – it can't get any more compact!

Order-No.	Series				
26980	7944-245				10
⊕	7012 ZOT	2xPZ1	6xPZ2	2xPZ3	
	7113 S	Universal holder, magnetic, style E 6.3.			

SB7944-245 XSelector Torsion, Pozidriv, 11 pcs.
Blister packed.

Order-No.	Series	
27006	SB7944-245	10



7944-055 XSelector Torsion, mixed, 11 pcs.
Housing: Box made of high quality plastic.
The simplest bit removal guaranteed.
Bits: 25 mm HOT Torsion bits.
Geometry: Patented torsion zone to prevent premature breaking of the bit when under stress.
Holder: Universal holder, magnetic.
Application: Especially suitable for fastenings in wood and soft materials – it can't get any more compact!

Order-No.	Series				
29412	7944-055				10
⓪	7010 HOT	1x5.5	1x6.5		
⊕	7011 HOT	1xPH1	2xPH2	1xPH3	
⊕	7012 HOT	1xPZ1	2xPZ2	1xPZ3	
	7113 S	Universal holder, magnetic, style E 6.3.			

Standard bits.



7944-005 XSelector Standard, mixed, 11 pcs.
Housing: Box made of high quality plastic.
The simplest bit removal guaranteed.
Bits: 25 mm Standard bits.
Holder: Universal holder, magnetic.
Application: All types of fastenings for trade and industry – it can't get any more compact!

Order-No.	Series				
26982	7944-005				10
⓪	7010 Z	1x5.5	1x6.5		
⊕	7011 Z	1xPH1	2xPH2	1xPH3	
⊕	7012 Z	1xPZ1	2xPZ2	1xPZ3	
	7113 S	Universal holder, magnetic, style E 6.3.			

SB7944-005 XSelector Standard, mixed, 11 pcs.
Blister packed.

Order-No.	Series	
27008	SB7944-005	10



7944-505 XSelector Standard, TORX®, 11 pcs.
Housing: Box made of high quality plastic.
The simplest bit removal guaranteed.
Bits: 25 mm Standard bits.
Holder: Universal holder, magnetic.
Application: All types of fastenings for trade and industry – it can't get any more compact!

Order-No.	Series				
26983	7944-505				10
⊕	7015 Z	1xT7	1xT8	1xT9	
		1xT10	1xT15	1xT20	
		1xT25	1xT27	1xT30	1xT40
	7113 S	Universal holder, magnetic, style E 6.3.			

SB7944-505 XSelector Standard, TORX®, 11 pcs.
Blister packed.

Order-No.	Series	
27009	SB7944-505	10

Standard bits.



7944-505TR XSelector Standard, TORX® H, 11 pcs.
Housing: Box made of high quality plastic.
The simplest bit removal guaranteed.
Bits: 25 mm Standard bits.
Suitable for TORX® Tamper Resistant security screws.
Holder: Universal holder, magnetic.
Application: All types of fastenings for trade and industry – it can't get any more compact!

Order-No.	Series				
26984	7944-505TR				10
⊕	7015 Z TR	1xT7H	1xT8H	1xT9H	
		1xT10H	1xT15H	1xT20H	
		1xT25H	1xT27H	1xT30H	1xT40H
	7113 S	Universal holder, magnetic, style E 6.3.			

SB7944-505TR XSelector Standard, TORX® H, 11 pcs.
Blister packed.

Order-No.	Series	
27010	SB7944-505TR	10



7944-904 XSelector Standard, mixed, 11 pcs.
Housing: Box made of high quality plastic.
The simplest bit removal guaranteed.
Bits: 25 mm Standard bits.
Holder: Universal holder, magnetic.
Application: All types of fastenings for trade and industry – it can't get any more compact!

Order-No.	Series				
26985	7944-904				10
⊕	7011 Z	1xPH1	1xPH2	1xPH3	
⊕	7012 Z	1xPZ1	1xPZ2	1xPZ3	
⊕	7015 Z	1xT15	1xT20	1xT25	1xT30
	7113 S	Universal holder, magnetic, style E 6.3.			

SB7944-904 XSelector Standard, mixed, 11 pcs.
Blister packed.

Order-No.	Series	
27011	SB7944-904	10

Wiha XSelector.

Couldn't be smaller!

Standard bits.



7944-905 XSelector Standard, mixed, 11 pcs.
Housing: Box made of high quality plastic.
The simplest bit removal guaranteed.
Bits: 25 mm Standard bits.
Holder: Universal holder, magnetic.
Application: All types of fastenings for trade and industry – it can't get any more compact!

Order-No.	Series				
26986	7944-905				10
	7012 Z	1xPZ1	2xPZ2	2xPZ3	
	7015 Z	1xT15	1xT20	1xT25	
		1xT30	1xT40		
	7113 S	Universal holder, magnetic, style E 6.3.			

SB7944-905 XSelector Standard, mixed, 11 pcs.
Blister packed.

Order-No.	Series				
27012	SB7944-905				10



7944-906 XSelector Standard, mixed, 11 pcs.
Housing: Box made of high quality plastic.
The simplest bit removal guaranteed.
Bits: 25 mm Standard bits.
Holder: Universal holder, magnetic.
Application: All types of fastenings for trade and industry – it can't get any more compact!

Order-No.	Series				
26987	7944-906				10
	7011 Z	1xPH1	2xPH2	2xPH3	
	7015 Z	1xT15	1xT20	1xT25	
		1xT30	1xT40		
	7113 S	Universal holder, magnetic, style E 6.3.			

SB7944-906 XSelector Standard, mixed, 11 pcs.
Blister packed.

Order-No.	Series				
27013	SB7944-906				10

Standard bits.



7944-902 XSelector Standard, hex, 9 pcs.
Housing: Box made of high quality plastic.
The simplest bit removal guaranteed.
Bits: 25 mm Standard bits.
Holder: Universal holder, magnetic.
Application: All types of fastenings for trade and industry – it can't get any more compact!
Extra: With hex bits up to size 8 mm.

Order-No.	Series				
27157	7944-902				10
	7013 Z	1x1.5	1x2.0	1x2.5	
		1x3.0	1x4.0	1x5.0	
		1x6.0	1x8.0		
	7113 S	Universal holder, magnetic, style E 6.3.			



7944-995 XSelector Standard, SIT, 11 pcs.
Housing: Box made of high quality plastic.
The simplest bit removal guaranteed.
Bits: 25 mm SIT bits.
Holder: Universal holder, magnetic.
Application: All types of fastenings for trade and industry – it can't get any more compact!
Extra: With bits to fit ASSY® and Plas screws.

Order-No.	Series				
27321	7944-995				10
	7019 Z SIT	2xSIT 10	3xSIT 20	2xSIT 25	
		2xSIT 30	1xSIT 40		
	7113 S	Universal holder, magnetic, style E 6.3.			

Inkra bits.



7944-015 XSelector Inkra, mixed, 11 pcs.
Housing: Box made of high quality plastic.
The simplest bit removal guaranteed.
Bits: 25 mm Inkra bits.
Holder: Universal holder, magnetic.
Application: The ideal bits for all hard-to-reach places, especially suitable for wood screws – it can't get any more compact!

Order-No.	Series				
26988	7944-015				10
	7011 Inkra	1xPH1	3xPH2	1xPH3	
	7012 Inkra	1xPZ1	3xPZ2	1xPZ3	
	7113 S	Universal holder, magnetic, style E 6.3.			

SB7944-015 XSelector Inkra, mixed, 11 pcs.
Blister packed.

Order-No.	Series				
27014	SB7944-015				10



7944 Protector with System-Loop.
Customised holder for the XSelector.
Material: High quality, impact resistant plastic.
Application: For wall mounting or as a belt attachment when combined with the System Loop.

Order-No.	
27026	10

XSelector sales counter display.



NEW
7944 VB4 XSelector Torsion display.
Acrylic glass display with 12 pieces.

Order-No.	Series			
27047	Acrylic glass display with 12 pieces.			
①	7010 ZOT	1x5.5	1x6.5	
	7011 ZOT	1xPH1	2xPH2	1xPH3
	7012 ZOT	1xPZ1	2xPZ2	1xPZ3
	7113 S	Universal holder, magnetic, style E 6.3.		

NEW
7944 VB5 XSelector Standard display.
Acrylic glass display with 12 pieces.

Order-No.	Series			
27048	Acrylic glass display with 12 pieces.			
①	7010 Z	1x5.5	1x6.5	
	7011 Z	1xPH1	2xPH2	1xPH3
	7012 Z	1xPZ1	2xPZ2	1xPZ3
	7113 S	Universal holder, magnetic, style E 6.3.		



NEW
7944 VB6 XSelector Standard display.
Acrylic glass display with 12 pieces.

Order-No.	Series			
27049	Acrylic glass display with 12 pieces.			
⊕	7011 Z	1xPH1	1xPH2	1xPH3
	7012 Z	1xPZ1	1xPZ2	1xPZ3
⊗	7015 Z	1xT15	1xT20	1xT25
	7113 S	Universal holder, magnetic, style E 6.3.		



NEW
7944 VB7 XSelector Standard display.
Acrylic glass display with 12 pieces.

Order-No.	Series			
27050	Acrylic glass display with 12 pieces.			
⊗	7015 Z	1xT7	1xT8	1xT9
		1xT10	1xT15	1xT20
		1xT25	1xT27	1xT30
				1xT40
	7113 S	Universal holder, magnetic, style E 6.3.		

Wiha Collector.

Everything in one box.



A completely new look, and out-
standingly equipped: the new Wiha
Collector sets standards for conven-
ient application of the bits.

The first impression convinces:
the box is compact, solid and
surprises with an innovative
opening mechanism. The Collector
opens up like a book with the
easy-to-use button. The bits are
clearly laid out, easy to remove and
yet so firmly held that they cannot
fall out if the box is accidentally
knocked over.
And talking of bits: the assortment
is designed perfectly for all
applications. Whether for special
work in safety areas or for everyday
tasks in trade and industry,
the Wiha Collector is ready and
waiting.



Versatile: for up to 60 bits as well as
universal and quick release holders.



Innovative opening, and lots of space:
the new Collector.

Wiha Collector.

- Tough**
Compact form,
tough polycarbonate
- Easy to open**
With practical unlocking button
- for when only one hand is free
- Lots of space**
30 premium bits with bit holder
and hand-held screwdriver or
60 premium bits with bit holder
- Diverse**
Security bits or tried-and-
true Standard bits for all
applications
- Optimal seating of bits**
Easy to remove and yet still
firmly held

Security-bits.



7928-928 Bit Collector Security, mixed, 27 pcs.
Housing: Robust box made of high-tensile plastic.
The box opens automatically at the press of a button.
Handle: Wiha SoftFinish® multi-component handle, magnetic, with 1/4" bit mount.
Bits: 25 mm Standard and Torsion bits, TORX® Tamper Resistant, Tri-Wing®,
Torq-Set®, Spanner, hex Tamper Resistant.
Holder: Universal holder, magnetic.
Application: Bit cassette with bits for all popular security screws.

Order-No.	Series	
09393	7928-928	5
⊕	7015 Z TR	1xT8H 1xT10H 1xT15H 1xT20H 1xT25H 1xT27H 1xT30H 1xT40H
⊕	7019 ZOT TS	1x6 1x8 1x10
⊕	7019 ZOT TW	1x1 1x2 1x3 1x4
⊕	7019 Z SP	1x4 1x6 1x8 1x10
⊕	7013 Z TR	1xTR5/64 1xTR3/32 1xTR7/64 1xTR1/8 1xTR9/64 1xTR5/32
	7113 S	Universal holder, magnetic, style E 6.3.
	281-02	Bit holder with handle, magnetic, 1/4".

Standard bits.



7928-913 Bit Collector Standard, mixed, 32 pcs.
Housing: Robust box made of high-tensile plastic.
The box opens automatically at the press of a button.
Handle: Wiha SoftFinish® multi-component handle, magnetic, with 1/4" bit mount.
Bits: 25 mm Standard bits.
Holder: ClicFix quick release holder, magnetic.
Application: Can be used immediately for both machine and hand operation with
handle and bit holder.

Order-No.	Series	
34686	7928-913	5
⊕	7010 Z	1x4.5 1x5.5 1x6.5
⊕	7011 Z	2xPH1 5xPH2 2xPH3
⊕	7012 Z	2xPZ1 5xPZ2 2xPZ3
⊕	7015 Z	1xT10 1xT15 1xT20 1xT25 1xT30 1xT40
⊕	7013 Z	1x4.0 1x5.0 1x6.0
	7149	ClicFix quick release holder, magnetic, style E 6.3.
	281-02	Bit holder with handle, magnetic, 1/4".



7928-923 Bit Collector Standard, mixed, 61 pcs.
Housing: Robust box made of high-tensile plastic.
The box opens automatically at the press of a button.
Bits: 25 mm Standard bits.
Holder: ClicFix quick release holder, magnetic.
Application: The complete bit assortment for every professional.

Order-No.	Series	
07943	7928-923	5
⊕	7010 Z	1x4.5 1x5.5 1x6.5 1x8.0
⊕	7011 Z	7xPH1 13xPH2 3xPH3
⊕	7012 Z	7xPZ1 13xPZ2 3xPZ3
⊕	7015 Z	1xT10 1xT15 1xT20 1xT25 1xT30 1xT40
⊕	7013 Z	1x3.0 1x4.0 1x5.0 1x6.0
	7149	ClicFix quick release holder, magnetic, style E 6.3.

Wiha bit cassette and bulk packs.

Bit cassette.



7979-01 Standard bit case, mixed, 31 pcs.

Housing: Practical, rugged plastic box.
Bits: 25 mm Standard bits.
Holder: Universal holder, magnetic.

Order-No.	Series				
26252	7979-01				6
⌚	7010 Z	1x4.5	1x5.5	1x6.5	
⊕	7011 Z	2xPH1	6xPH2	1xPH3	
⊕	7012 Z	2xPZ1	6xPZ2	1xPZ3	
⊗	7015 Z	1xT10	1xT15	1xT20	
		1xT25	1xT30	1xT40	
●	7013 Z	1x4.0	1x5.0	1x6.0	
	7113 S	Universal holder, magnetic, style E 6.3.			



7979-02 Standard bit case, mixed, 31 pcs.

Housing: Practical, rugged plastic box.
Bits: 25 mm Standard bits.
Holder: Universal holder, magnetic.

Order-No.	Series				
26253	7979-02				6
⊕	7012 Z	5xPZ1	10xPZ2	3xPZ3	
⊗	7015 Z	2xT10	2xT15	2xT20	
		2xT25	2xT30	2xT40	
	7113 S	Universal holder, magnetic, style E 6.3.			



NEW 7979-03 Standard bit case, mixed, 31 pcs.

Housing: Practical, rugged plastic box.
Bits: 25 mm Standard bits.
Holder: Universal holder, magnetic.

Order-No.	Series				
36310	7979-03				
⊕	7012 Z	2xPZ1	3xPZ2	1xPZ3	
⊗	7015 Z	2xT10	6xT15	6xT20	
		6xT25	2xT30	2xT40	
	7113 S	Universal holder, magnetic, style E 6.3.			

Bit bulk pack TiN.



7929 TiN Bit bulk pack TiN, 25 mm, 50 pcs.

Packaging: Practical cardboard box. Can be used as a dispenser in the workplace.
Bits: 25 mm TiN Torsion bits.
Unmixed, available in the standard Phillips, Pozidriv and TORX® sizes.
Geometry: Torsion zone for protecting against premature breakage of bits under load.
Coating: Titanium nitride for extended tool life.
Application: Especially for professional needs.

Order-No.	Content	Quantity
08053	⊕ 7011 TiN 50	PH1 x 25
08054	⊕ 7011 TiN 50	PH2 x 25
08055	⊕ 7011 TiN 50	PH3 x 25
08062	⊕ 7012 TiN 50	PZ1 x 25
08063	⊕ 7012 TiN 50	PZ2 x 25
08064	⊕ 7012 TiN 50	PZ3 x 25
33672	⊗ 7015 TiN 50	T10 x 25
33673	⊗ 7015 TiN 50	T15 x 25
33674	⊗ 7015 TiN 50	T20 x 25
33675	⊗ 7015 TiN 50	T25 x 25
33676	⊗ 7015 TiN 50	T30 x 25

Bit bulk pack HOT.



7929 HOT Bit bulk pack HOT, 25 mm, 50 pcs.

Packaging: Practical cardboard box. Can be used as a dispenser in the workplace.
Bits: 25 mm HOT Torsion bits.
Unmixed, available in the standard Phillips, Pozidriv and TORX® sizes.
Geometry: Torsion zone for protecting against premature breakage of bits under load.
Application: Especially for professional needs.

Order-No.	Content	Quantity
08050	⊕ 7011 HOT 50	PH1 x 25
08051	⊕ 7011 HOT 50	PH2 x 25
08052	⊕ 7011 HOT 50	PH3 x 25
08059	⊕ 7012 HOT 50	PZ1 x 25
08060	⊕ 7012 HOT 50	PZ2 x 25
08061	⊕ 7012 HOT 50	PZ3 x 25
33677	⊗ 7015 HOT 50	T20 x 25
33678	⊗ 7015 HOT 50	T25 x 25
33679	⊗ 7015 HOT 50	T30 x 25

Bit bulk pack ZOT.



7929 ZOT Bit bulk pack ZOT, 25 mm, 50 pcs.

Packaging: Practical cardboard box. Can be used as a dispenser in the workplace.
Bits: 25 mm ZOT Torsion bits.
Unmixed, available in the standard Phillips and Pozidriv sizes.
Geometry: Patented torsion zone to prevent premature breaking of the bit when under stress.
Application: Especially for professional needs.

Order-No.	Content	Quantity
29875	⊕ 7011 ZOT 50	PH1 x 25
29876	⊕ 7011 ZOT 50	PH2 x 25
29877	⊕ 7011 ZOT 50	PH3 x 25
29878	⊕ 7012 ZOT 50	PZ1 x 25
29879	⊕ 7012 ZOT 50	PZ2 x 25
29880	⊕ 7012 ZOT 50	PZ3 x 25

Bit bulk pack Inkra.



7929 Inkra Bit bulk pack Inkra, 25 mm, 50 pcs.

Packaging: Practical cardboard box. Can be used as a dispenser in the workplace.
Bits: 25 mm Inkra bits.
Unmixed, available in the standard Phillips and Pozidriv sizes.
Geometry: The ideal bit for areas that are difficult to access, particularly suitable for wood screws.
Coating: Non-corrosive coating.
Application: Especially for professional needs.

Order-No.	Content	Quantity
31990	⊕ 7011 Inkra 50	PH1 x 25
31991	⊕ 7011 Inkra 50	PH2 x 25
31992	⊕ 7011 Inkra 50	PH3 x 25
31993	⊕ 7012 Inkra 50	PZ1 x 25
31994	⊕ 7012 Inkra 50	PZ2 x 25
31995	⊕ 7012 Inkra 50	PZ3 x 25

Bit bulk pack Standard.



7929 Z Bit bulk pack Standard, 25 mm, 50 pcs.

Packaging: Practical cardboard box. Can be used as a dispenser in the workplace.
Bits: 25 mm Standard bits.
Unmixed, available in the standard Phillips, Pozidriv and TORX® sizes.
Application: Especially for professional needs.

Order-No.	Content	Quantity
08047	⊕ 7011 Z 50	PH1 x 25
08048	⊕ 7011 Z 50	PH2 x 25
08049	⊕ 7011 Z 50	PH3 x 25
08056	⊕ 7012 Z 50	PZ1 x 25
08057	⊕ 7012 Z 50	PZ2 x 25
08058	⊕ 7012 Z 50	PZ3 x 25
08065	⊗ 7015 Z 50	T10 x 25
08066	⊗ 7015 Z 50	T15 x 25
08067	⊗ 7015 Z 50	T20 x 25
08068	⊗ 7015 Z 50	T25 x 25
29544	⊗ 7015 Z 50	T27 x 25
08069	⊗ 7015 Z 50	T30 x 25
08070	⊗ 7015 Z 50	T40 x 25

Wiha SB bit programme.

Full programme range in outstanding quality.



Wiha SB bit programme.


You can display the bits effectively in the practical Wiha plastic boxes.

The bits are easily recognisable in the dust-repellent, transparent packaging. In addition, the labels provide all necessary information and at the same time ensure protection against theft. Contents, EAN code, article number and order number – everything can be seen at a glance with the large-format symbols.

A comprehensive range: the Wiha SB bit range includes more than 100 different articles.

- Full-surface label with viewing window allows a view of box contents
- Large, clearly laid out presentation of quality, size and quantity
- Reusable plastic box
- Full assortment
- Slotted, Phillips, Pozidriv, hexagonal and TORX® outputs, various bit holders and tool shafts
- In qualities Dura, Diamond, TiN, HOT, ZOT, Inkra and Standard
- 1-pc, 2-pcs, 3-pcs, 6-pcs and 10-pcs


Style C 6.3 (1/4").

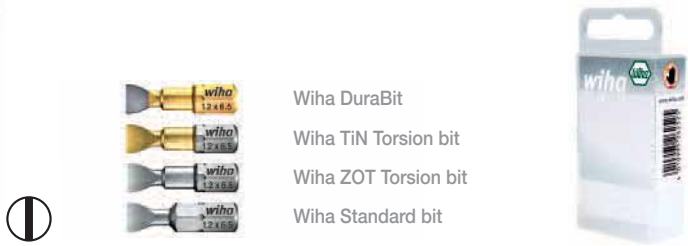

7010 Slotted bits 25 mm, in plastic box.
Packaging: Plastic box, reusable and dust repellent.
Extra: Easily identifiable content with large symbols.

Order-No.	Content	Quantity
Wiha DuraBit		
24713	① 7010 DR	3 4.5x25 5.5x25 6.5x25
Wiha TiN Torsions bit		
08455	① 7010 TiN	3 4.5x25 5.5x25 6.5x25
Wiha ZOT Torsions bit		
08454	① 7010 ZOT	3 4.5x25 5.5x25 6.5x25
09496	① 7010 ZOT	6 5.5x25 6.5x25
	⊕ 7011 ZOT	PH1x25 PH2x25
	⊕ 7012 ZOT	PZ1x25 PZ2x25
Wiha Standard bit		
07863	① 7010 Z	2 4.5x25 5.5x25
07864	① 7010 Z	2 6.5x25 8.0x25
08453	① 7010 Z	3 4.5x25 5.5x25 6.5x25
09495	① 7010 Z	6 5.5x25 6.5x25
	⊕ 7011 Z	PH1x25 PH2x25
	⊕ 7012 Z	PZ1x25 PZ2x25

Style C 6.3 (1/4").

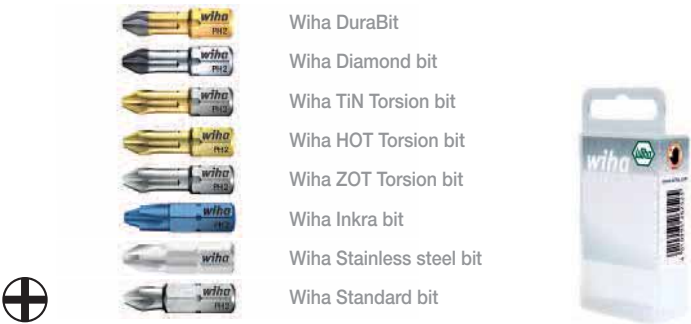

7011 Phillips bits 25 mm, in plastic box.
Packaging: Plastic box, reusable and dust repellent.
Extra: Easily identifiable content with large symbols.

Order-No.	Content	Quantity
Wiha DuraBit		
33855	⊕ 7011 DR	2 PH1x25
24267	⊕ 7011 DR	2 PH2x25
33856	⊕ 7011 DR	2 PH3x25
24269	⊕ 7011 DR	3 PH1x25 PH2x25 PH3x25
32045	⊕ 7011 DR	10 PH2x25 NEW
Wiha Diamond Torsion bit		
22107	⊕ 7011 D	2 PH1x25
22109	⊕ 7011 D	2 PH2x25
22111	⊕ 7011 D	2 PH3x25
22113	⊕ 7011 D	3 PH1x25 PH2x25 PH3x25
36278	⊕ 7011 D	10 PH2x25 NEW
Wiha TiN Torsion bit		
07821	⊕ 7011 TiN	2 PH1x25
07828	⊕ 7011 TiN	2 PH2x25
07846	⊕ 7011 TiN	2 PH3x25
07847	⊕ 7011 TiN	3 PH1x25 PH2x25 PH3x25
36277	⊕ 7011 TiN	10 PH2x25 NEW
Wiha HOT Torsion bit		
20814	⊕ 7011 HOT	2 PH2x25
20818	⊕ 7011 HOT	3 PH1x25 PH2x25 PH3x25
32060	⊕ 7011 HOT	10 PH1x25 NEW
32061	⊕ 7011 HOT	10 PH2x25 NEW
32062	⊕ 7011 HOT	10 PH3x25 NEW
36276	⊕ 7011 HOT	20 PH2x25 NEW
Wiha ZOT Torsion Bit		
07876	⊕ 7011 ZOT	2 PH1x25
07877	⊕ 7011 ZOT	2 PH2x25
07878	⊕ 7011 ZOT	2 PH3x25
07879	⊕ 7011 ZOT	3 PH1x25 PH2x25 PH3x25
24752	⊕ 7011 ZOT	10 PH2x25
36281	⊕ 7011 ZOT	10 PH3x25 NEW
36274	⊕ 7011 ZOT	10 PH1x25 NEW
24754	⊕ 7011 ZOT	20 PH2x25 NEW

Style C 6.3 (1/4").

Order-No.	Content	Quantity
Wiha Inkra bit		
22318	⊕ 7011 Inkra	2 PH1x25
22320	⊕ 7011 Inkra	2 PH2x25
22322	⊕ 7011 Inkra	2 PH3x25
22649	⊕ 7011 Inkra	3 PH1x25 PH2x25 PH3x25
36279	⊕ 7011 Inkra	10 PH2x25 NEW
Wiha Stainless steel bit		
34483	⊕ 7011 ST	2 PH1x25
34484	⊕ 7011 ST	2 PH2x25
34485	⊕ 7011 ST	2 PH3x25
Wiha Standard bit		
07855	⊕ 7011 Z	3 PH1x25
07856	⊕ 7011 Z	3 PH2x25
07857	⊕ 7011 Z	3 PH3x25
07858	⊕ 7011 Z	3 PH1x25 PH2x25 PH3x25
24733	⊕ 7011 Z	10 PH2x25
32055	⊕ 7011 Z	10 PH1x25 NEW
36280	⊕ 7011 Z	10 PH3x25 NEW
35834	⊕ 7011 Z	10 PH2x25 NEW
36275	⊕ 7011 Z	20 PH2x25 NEW

Wiha SB bit programme.

Full programme range in outstanding quality.

Style C 6.3 (1/4").



Wiha DuraBit

Wiha Diamond bit

Wiha TiN Torsion bit

Wiha HOT Torsion bit

Wiha ZOT Torsion bit

Wiha Inkra bit

Wiha Stainless steel bit

Wiha Standard bit



7012 Pozidriv bits 25 mm, in plastic box.

Packaging: Plastic box, reusable and dust repellent.

Extra: Easily identifiable content with large symbols.

Order-No.	Content	Quantity
Wiha DuraBit		
33857	 7012 DR	2 PZ1x25
24271	 7012 DR	2 PZ2x25
33858	 7012 DR	2 PZ3x25
24273	 7012 DR	3 PZ1x25 PZ2x25 PZ3x25
32046	 7012 DR	10 PZ2x25 NEW
Wiha Diamond torsion bit		
22115	 7012 D	2 PZ1x25
22117	 7012 D	2 PZ2x25
22119	 7012 D	2 PZ3x25
22121	 7012 D	3 PZ1x25 PZ2x25 PZ3x25
36283	 7012 D	10 PZ2x25 NEW
Wiha TiN Torsions bit		
07848	 7012 TiN	2 PZ1x25
07849	 7012 TiN	2 PZ2x25
07850	 7012 TiN	2 PZ3x25
07851	 7012 TiN	3 PZ1x25 PZ2x25 PZ3x25
35388	 7012 TiN	10 PZ2x25 NEW
Wiha HOT Torsions bit		
20820	 7012 HOT	2 PZ1x25
20822	 7012 HOT	2 PZ2x25
20824	 7012 HOT	2 PZ3x25
20827	 7012 HOT	3 PZ1x25 PZ2x25 PZ3x25
32057	 7012 HOT	10 PZ1x25 NEW
32058	 7012 HOT	10 PZ2x25 NEW
32059	 7012 HOT	10 PZ3x25 NEW
35387	 7012 HOT	20 PZ2x25 NEW
Wiha ZOT Torsions bit		
07880	 7012 ZOT	2 PZ1x25
07881	 7012 ZOT	2 PZ2x25
07882	 7012 ZOT	2 PZ3x25
07883	 7012 ZOT	3 PZ1x25 PZ2x25 PZ3x25
36173	 7012 ZOT	10 PZ1x25 NEW
36286	 7012 ZOT	10 PZ3x25 NEW
24758	 7012 ZOT	10 PZ2x25 NEW
24758	 7012 ZOT	20 PZ2x25 NEW

Style C 6.3 (1/4").



Wiha DuraBit

Wiha Diamond bit

Wiha TiN Torsion bit

Wiha Stainless steel bit

Wiha Standard bit



7015 TORX® bits 25 mm, in plastic box.

Packaging: Plastic box, reusable and dust repellent.

Extra: Easily identifiable content with large symbols.

Order-No.	Content	Quantity
Wiha Inkra bit		
22324	 7012 Inkra	2 PZ1x25
22326	 7012 Inkra	2 PZ2x25
22328	 7012 Inkra	2 PZ3x25
22647	 7012 Inkra	3 PZ1x25 PZ2x25 PZ3x25
36284	 7012 Inkra	10 PZ2x25 NEW
Wiha Stainless steel bit		
34486	 7012 ST	2 PZ1x25
34487	 7012 ST	2 PZ2x25
34488	 7012 ST	2 PZ3x25
Wiha Standard bit		
07859	 7012 Z	3 PZ1x25
07860	 7012 Z	3 PZ2x25
07861	 7012 Z	3 PZ3x25
20542	 7012 Z	1 PZ4x25
07862	 7012 Z	3 PZ1x25 PZ2x25 PZ3x25
24742	 7012 Z	10 PZ2x25
32070	 7012 Z	10 PZ1x25 NEW
32071	 7012 Z	10 PZ3x25 NEW
36285	 7012 Z	10 PZ2x25 NEW
35709	 7012 Z	20 PZ1x25 NEW
36282	 7012 Z	20 PZ2x25 NEW

Style C 6.3 (1/4").



Wiha DuraBit

Wiha Diamond bit

Wiha TiN Torsion bit

Wiha Stainless steel bit

Wiha Standard bit



Order-No.	Content	Quantity
Wiha DuraBit		
33859	 7015 DR	1 T10x25
33860	 7015 DR	1 T15x25
33861	 7015 DR	1 T20x25
33862	 7015 DR	1 T25x25
33863	 7015 DR	1 T30x25
33864	 7015 DR	1 T40x25
Wiha Diamond torsion bit		
22123	 7015 D	1 T10x25
22125	 7015 D	1 T15x25
22127	 7015 D	1 T20x25
22129	 7015 D	1 T25x25
22131	 7015 D	1 T30x25
22133	 7015 D	1 T40x25
Wiha TiN Torsions bit		
34747	 7015 TiN	2 T10x25
34748	 7015 TiN	2 T15x25
34749	 7015 TiN	2 T20x25
34750	 7015 TiN	2 T25x25
34751	 7015 TiN	2 T30x25
34752	 7015 TiN	2 T40x25
Wiha Stainless steel bit		
34489	 7015 ST	2 T10x25
34490	 7015 ST	2 T15x25
34491	 7015 ST	2 T20x25
34492	 7015 ST	2 T25x25
34493	 7015 ST	2 T30x25
34494	 7015 ST	2 T40x25
Wiha Standard bit		
22640	 7015 Z	2 T7x25 T8x25
22641	 7015 Z	2 T9x25 T10x25
22643	 7015 Z	2 T15x25 T20x25
22645	 7015 Z	2 T25x25 T27x25
08421	 7015 Z	2 T10x25
08422	 7015 Z	2 T15x25
08423	 7015 Z	2 T20x25
08424	 7015 Z	2 T25x25
26451	 7015 Z	2 T27x25
08425	 7015 Z	2 T30x25
08426	 7015 Z	2 T40x25
07870	 7015 Z	3 T7x25 T8x25 T9x25
07871	 7015 Z	3 T10x25 T15x25 T20x25
31913	 7015 Z	3 T15x25 T20x25 T25x25
07872	 7015 Z	3 T25x25 T30x25 T40x25
07873	 7015 Z	6 T10x25 T15x25 T20x25 T25x25 T30x25 T40x25
34746	 7015 Z	10 T15x25
24746	 7015 Z	10 T20x25
24748	 7015 Z	10 T25x25
24750	7015 Z	10 T30x25
35832	7015 Z	10 T10x25 NEW
36288	7015 Z	10 T40x25 NEW

Style C 6.3 (1/4").



Wiha DuraBit

Wiha Diamond bit

Wiha TiN Torsion bit

Wiha Stainless steel bit

Wiha Standard bit



7013 Hex bits 25 mm, in plastic box.

Packaging: Plastic box, reusable and dust repellent.

Extra: Easily identifiable content with large symbols.

Order-No.	Content	Quantity
25681	 7013 Z	2 4.0x25
25679	 7013 Z	2 5.0x25
07865	 7013 Z	3 2.0x25 2.5x25 3.0x25
07866	 7013 Z	3 4.0x25 5.0x25 6.0x25



Wiha DuraBit

Wiha Diamond bit

Wiha TiN Torsion bit

Wiha Stainless steel bit

Wiha Standard bit



7017 Hexagon ball end bits 38 mm, in plastic box.

Packaging: Plastic box, reusable and dust repellent.

Extra: Easily identifiable content with large symbols.

Order-No.	Content	Quantity
22651	 7017 Z	3 2.0x38 2.5x38 3.0x38
22653	 7017 Z	3 3.0x38 4.0x38 5.0x38
22655	 7017 Z	3 4.0x38 5.0x38 6.0x38

Wiha SB bit programme.

Full programme range in outstanding quality.

Style E 6.3 (1/4").



7040 Slotted bits 50 mm, in plastic box.
Packaging: Plastic box, reusable and dust repellent.
Extra: Easily identifiable content with large symbols.

Order-No.	Content	Quantity
08419	① 7040 Z	3 3.0x50 3.5x50 4.0x50
08420	① 7040 Z	3 5.5x50 6.5x50 8.0x50



7041 Phillips bits 50 mm, in plastic box.
Packaging: Plastic box, reusable and dust repellent.
Extra: Easily identifiable content with large symbols.

Order-No.	Content	Quantity
24727	⊕ 7041 DR	2 PH2x50
07887	⊕ 7041 ZOT	3 PH1x50 PH2x50 PH3x50



7042 Pozidriv bits 50 mm, in plastic box.
Packaging: Plastic box, reusable and dust repellent.
Extra: Easily identifiable content with large symbols.

Order-No.	Content	Quantity
24738	⊕ 7042 DR	2 PZ2x50
07888	⊕ 7042 ZOT	3 PZ1x50 PZ2x50 PZ3x50

Style E 6.3 (1/4").




NEW
7049XZ Professional-Bit, Xeno-slotted/Pozidriv, in plastic box.
Packaging: Plastic box, reusable and dust repellent.
Application: For fastening and unfastening positive/ negative screws in switchboard systems, fuse boxes, terminal blocks and relays.
Extra: Easily identifiable content with large symbols.

Order-No.	Content	Quantity
36086	⊕ 7049XZ	2 SL/PZ1x70
36082	⊕ 7049XZ	2 SL/PZ2x70



7045 TORX® bits 50 mm, in plastic box.
Packaging: Plastic box, reusable and dust repellent.
Extra: Easily identifiable content with large symbols.

Order-No.	Content	Quantity
07874	⊕ 7045 Z	3 T10x50 T15x50 T20x50
07875	⊕ 7045 Z	3 T25x50 T30x50 T40x50

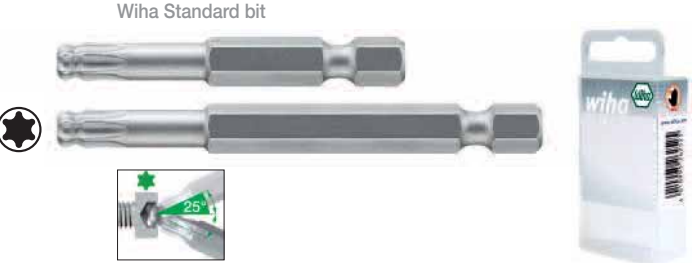

7045BE TORX® ball end bits 50 mm, in plastic box.
Packaging: Plastic box, reusable and dust repellent.
Extra: Easily identifiable content with large symbols.
The TORX® ball end enables fastening and unfastening at an angle of up to 25°.
With elongated TORX® profile behind ball end.

Order-No.	Content	Quantity
32805	⊕ 7045BE	1 T20x50
32808	⊕ 7045BE	1 T20x70
32806	⊕ 7045BE	1 T25x50
32809	⊕ 7045BE	1 T25x70
32807	⊕ 7045BE	3 T20x50 T25x50 T30x50

Bitholder.



7148CM CentroFix quick release holder, magnetic, in plastic box.
Sleeve: Metal, coated.
Suitable for: For bits according to DIN 3126, ISO 1173 style C 6.3 and E 6.3.
Drive: DIN 3126, ISO 1173, style E 6.3.
Packaging: Plastic box, reusable and dust repellent.
Application: Whenever the bit needs a secure and zero-play hold. Optimised for the use of drill bits.
Extra: Due to the special holding mechanism, this bit holder holds all types of bits with 1/4" hex drive.
The play between bit and holder is reduced to a minimum.
Real single-handed operation for fast bit exchange.

Order-No.	①	②	③	④
35386	1/4	1/4	60	1



7149 ClicFix quick release holder, magnetic, in plastic box.
Packaging: Plastic box, reusable and dust repellent.
Content: ClicFix quick release holder, 1/4" x 60 mm.
Extra: Easily identifiable content with large symbols.

Order-No.	①	②	③	④
24778	1/4	1/4	60	1



7113 S Universal holder, magnetic, in plastic box.
Packaging: Plastic box, reusable and dust repellent.
Content: Universal holder, 1/4" x 58 mm.
Extra: Easily identifiable content with large symbols.

Order-No.	①	②	③	④
07869	1/4	1/4	58	1

Tool shaft. Nut driver.



7240 Tool shaft, in plastic box.
Packaging: Plastic box, reusable and dust repellent.
Content: Tool shaft 1/4" x 50 mm.
Extra: Easily identifiable content with large symbols.

Order-No.	①	②	③	④
08427	1/4	1/4	50	1



7044 M Standard bit, nut driver insert, 4 pcs, in plastic box.
Packaging: Plastic box, reusable and dust repellent.
Application: For a secure hold on screws.
Extra: Easily identifiable content with large symbols.
With strong permanent magnet.

Order-No.	Series	④
36396	7044 M	1
①	7044 M	7.0x55 8.0x55 10.0x55 3/8x55