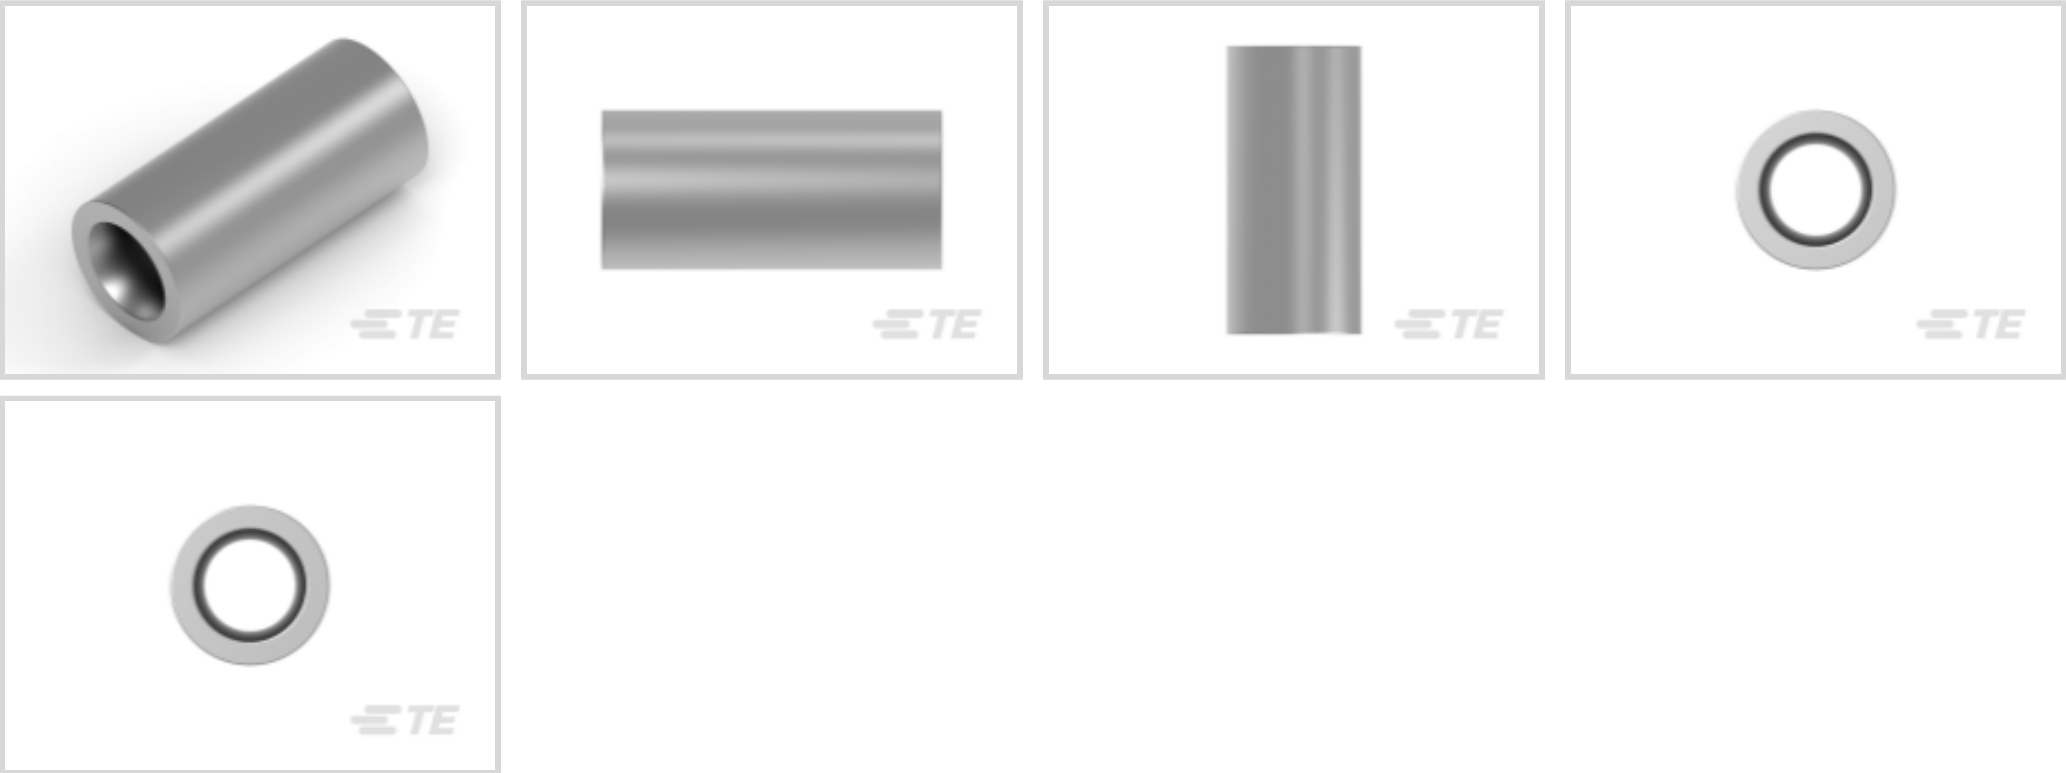




Terminals & Splices > Splices



Splice Type: **Parallel Splice**

Wire Size: **.26 - 1.65 mm²**

Sealable: **No**

Splice Features: **Serrated**

Features

Product Type Features

Splice Accessory Type	Splice
Splice Type	Parallel Splice
Sealable	No
Compatible With Discrete Wire Type	Solid, Stranded
Wire Insulation Support Retention Type	Non-Insulation Support

Configuration Features

Compatible With Wire & Cable Type	Discrete Wire
-----------------------------------	---------------

Body Features

Product Weight	.417 g
Splice Features	Serrated

Contact Features

	100 μin
Terminal Plating Material	Tin
Contact Base Material	Copper
Barrel Type	Closed

Mechanical Attachment

Wire Insulation Support	Without
-------------------------	---------

Dimensions

Outside Diameter	3.58 mm[.141 in]
Wire Size	509 - 3260 CMA
Barrel Inside Diameter	1.55 mm[.061 in]
Terminal Material Thickness	.84 mm[.033 in]
Product Length	7.65 mm[.301 in]

Usage Conditions

Insulation Option	Uninsulated
Operating Temperature Range	170 °C[338 °F]

Operation/Application

Compatible With Wire Base Material	Copper
------------------------------------	--------

Industry Standards

Government Qualified Splice	No
-----------------------------	----

Packaging Features

Packaging Quantity	1000
Packaging Method	Loose Piece

Product Compliance

For compliance documentation, visit the product page on TE.com>

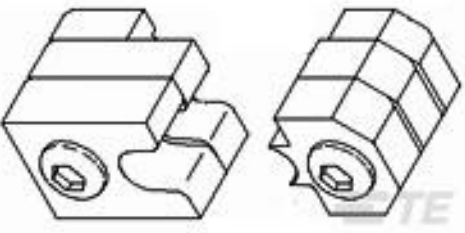
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer


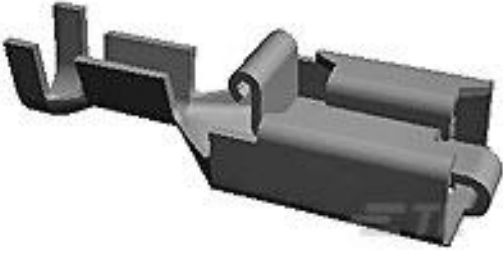
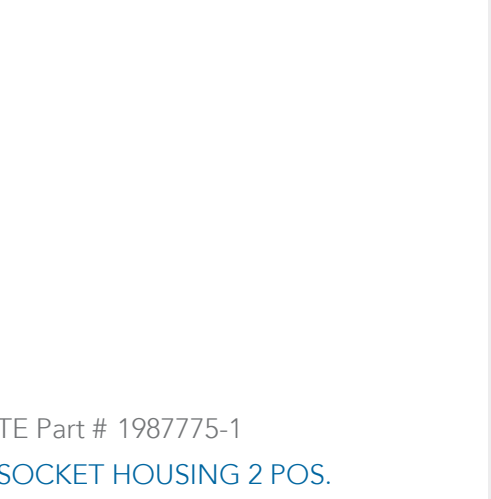


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

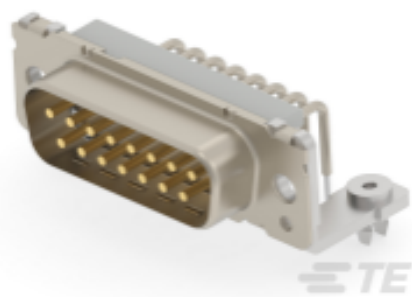
Compatible Parts

 TE Part # 58545-1 SOLISTRAND 10-22 DIE ASSY	 TE Part # 49935 DAHT SOLIS 22-10 ASSY	 TE Part # 58546-1 PC 22-10 SOLISSPICE SPL I SHT	 TE Part # 525693 DAHT SOLIS 22-10 ASSY
 TE Part # 58545-3 SDE DIE ASSY. 22-10 SOLISTRAND	 TE Part # 47812 DIES SOLIS 22-16 DIE SET	 TE Part # 169400 CERTI-LOK FRAME W/O DIES	

Customers Also Bought

 TE Part # 1-2308349-9 CRIMP FLANGE 9 SMALL	 TE Part # 927852-1 PL 250 REC TERMINAL 20-17 AWG BR	 TE Part # 318900-1 CONTROL BOX ASSY(MAN ADJ BNCH)	 TE Part # 1987775-1 SOCKET HOUSING 2 POS.
---	---	--	--



TE Part # 134928-E ERBIC BUS D BUS-SYSTEM SYS PROF MAX SC C	TE Part # 1987776-1 MQS; SEALING	TE Part # 096673N003 202D221-4/86-0-CS8240	TE Part # ZPF000000000147946 MS27488-20
TE Part # CP0058-000 RMK-8X30-A4-CS34034	 TE Part # 4-1393479-4 V23529A1223C215=SUB D STIFTLEI		

Documents

Product Drawings

SPLICE,SOLIS PARA 22-16

English

CAD Files

Customer View Model

ENG_CVM_CVM_34130_L.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_34130_L.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_34130_L.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Agency Approvals

UL Report

English

UL Report

English