




PLASTI-GRIP

TE Internal #: 34148

Closed Ring Tongue Terminal, 22 – 16 AWG, M4 / #8 Stud Size,  
4.74 mm [.171 in] Stud Diameter, Closed Barrel, Straight, Tin,  
PLASTI-GRIP

[View on TE.com >](#)

Terminals & Splices > Ring Terminals

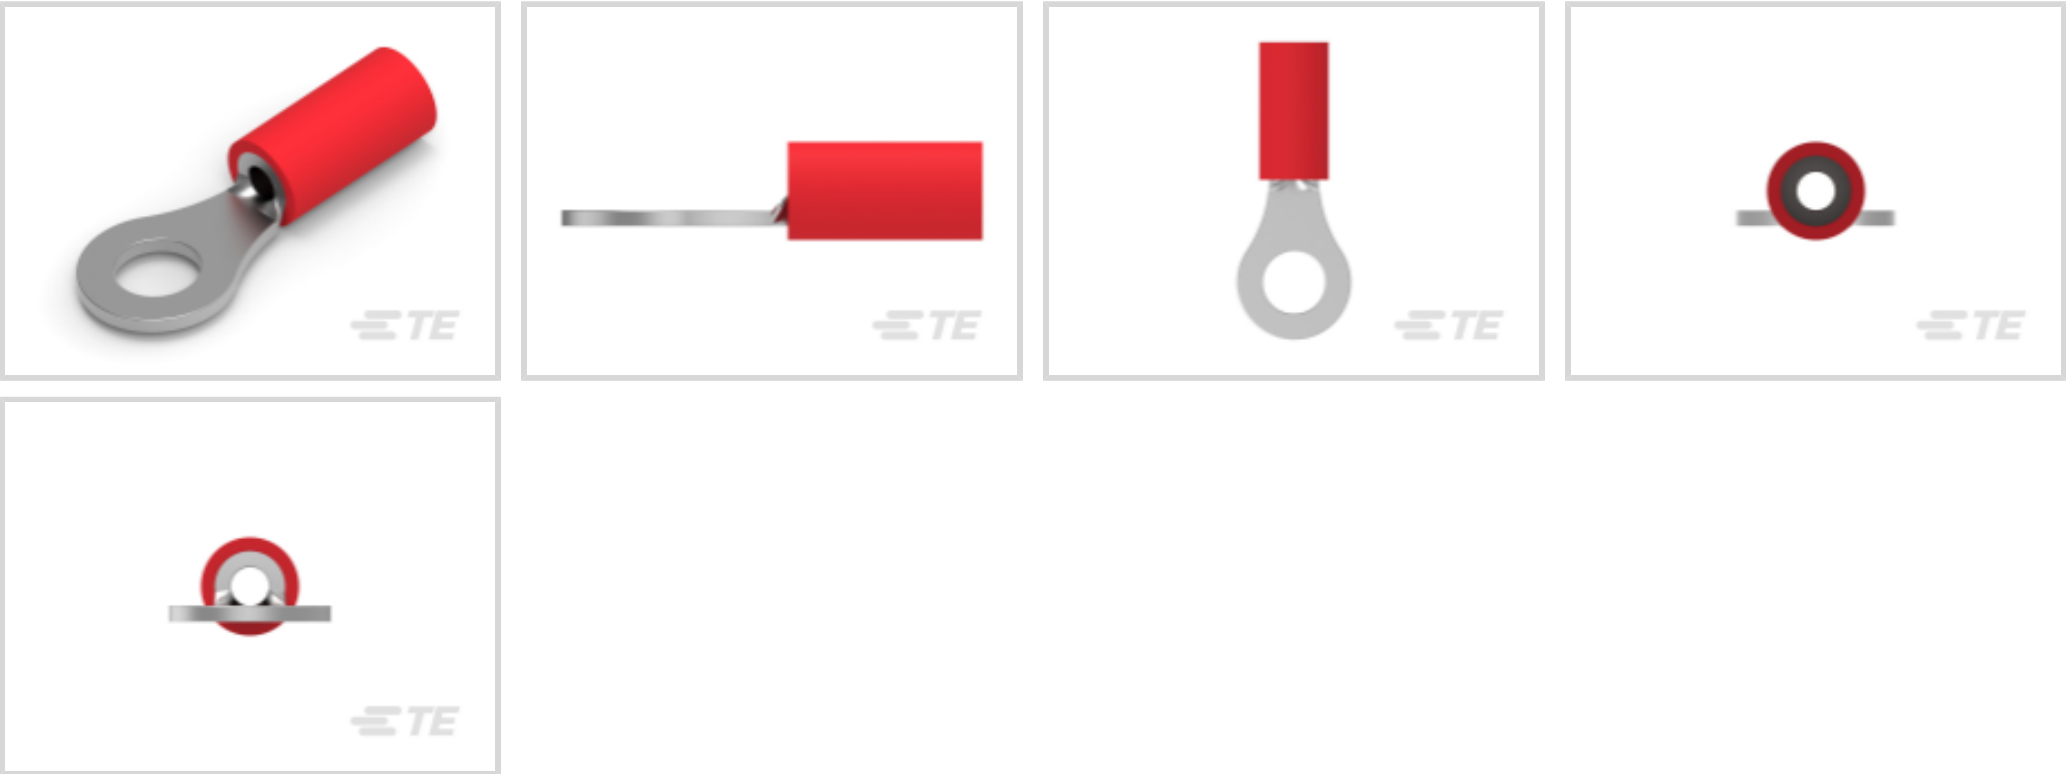

Ring Terminal Product Type: Closed Ring Tongue Terminal

Wire Size: 509 – 3260 CMA

Stud Size: #8, M4

Features

Product Type Features

|                            |                             |
|----------------------------|-----------------------------|
| Ring Terminal Product Type | Closed Ring Tongue Terminal |
| Stud Size                  | #8, M4                      |
| Sealable                   | No                          |

|                                        |                    |
|----------------------------------------|--------------------|
| Wire Insulation Support Retention Type | Insulation Support |
|----------------------------------------|--------------------|

Configuration Features

|                 |   |
|-----------------|---|
| Number of Holes | 1 |
|-----------------|---|

Electrical Characteristics

|                |       |
|----------------|-------|
| Voltage Rating | 600 V |
|----------------|-------|

Body Features

|                |         |
|----------------|---------|
| Product Weight | 2.237 g |
|----------------|---------|

Contact Features

|                           |          |
|---------------------------|----------|
| Barrel Type               | Closed   |
| Terminal Orientation      | Straight |
| Terminal Plating Material | Tin      |

Mechanical Attachment

|                         |      |
|-------------------------|------|
| Wire Insulation Support | With |
|-------------------------|------|

Dimensions

|                                      |                               |
|--------------------------------------|-------------------------------|
| Wire Size                            | 509 – 3260 CMA                |
| Stud Diameter                        | 4.74 mm[.171 in]              |
| Tongue Thickness                     | .79 mm[.031 in]               |
| Product Length                       | 21.74 mm[.86 in]              |
| Compatible Insulation Diameter (Max) | 3.56 mm[.14 in]               |
| Compatible Insulation Diameter Range | 2.67 – 3.56 mm[.105 – .14 in] |

Usage Conditions

|                             |                     |
|-----------------------------|---------------------|
| Insulation Option           | Partially Insulated |
| Operating Temperature Range | 105 °C[221 °F]      |

Operation/Application

|                                       |        |
|---------------------------------------|--------|
| Compatible With Wire Base Material    | Copper |
| Compatible With Wire Plating Material | Tin    |

Industry Standards

|                               |    |
|-------------------------------|----|
| Government Qualified Terminal | No |
|-------------------------------|----|

Packaging Features

|                    |             |
|--------------------|-------------|
| Packaging Quantity | 1000        |
| Packaging Method   | Loose Piece |

Product Compliance

For compliance documentation, visit the product page on TE.com>




|                                               |                                                                                                                                 |
|-----------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|
| EU RoHS Directive 2011/65/EU                  | Compliant                                                                                                                       |
| EU ELV Directive 2000/53/EC                   | Compliant                                                                                                                       |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold                                                                                         |
| EU REACH Regulation (EC) No. 1907/2006        | Current ECHA Candidate List: JUNE 2023 (235)<br>Candidate List Declared Against: JUNE 2023 (235)<br>Does not contain REACH SVHC |
| Halogen Content                               | Not Low Halogen - contains Br or Cl > 900 ppm.                                                                                  |
| Solder Process Capability                     | Not applicable for solder process capability                                                                                    |



Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>


Compatible Parts
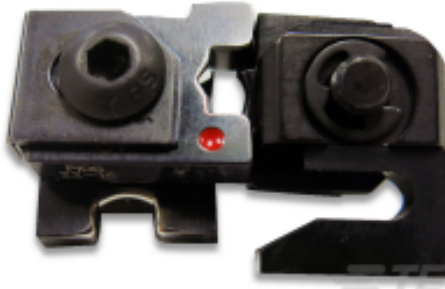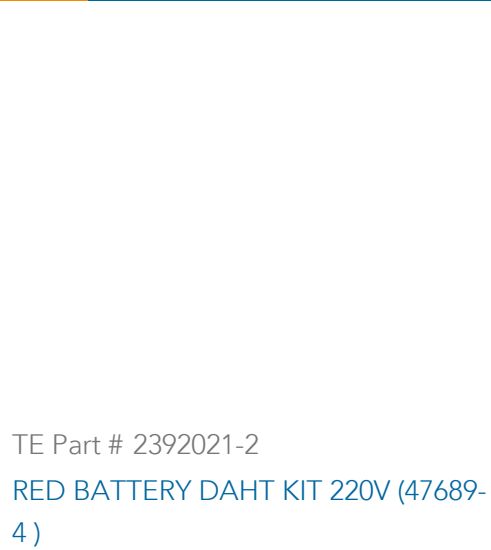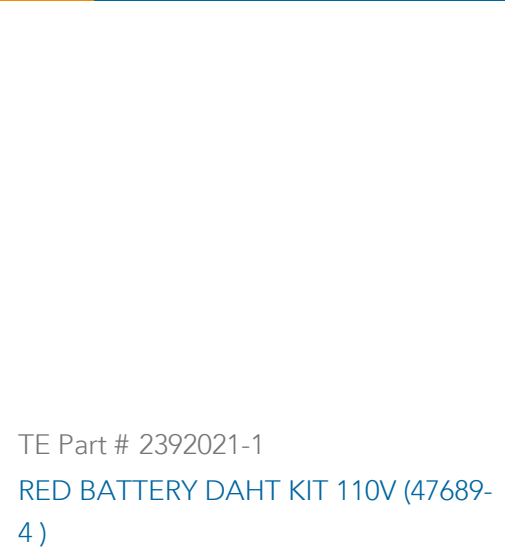
|                                                                                                                                          |                                                                                                                                                         |                                                                                                                                                          |                                                                                                                                            |
|------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|
|  <p>TE Part # 59170<br/>T-HEAD PIDG SH 26-14 ASSY</p> |  <p>TE Part # 59824-1<br/>TETRA-CRIMP PIDG PG FASTON 22-10 ASSY</p>  |  <p>TE Part # 47386<br/>DAHT PG PIDG 26-16 ASSY</p>                 |  <p>TE Part # 47386-4<br/>DAHT PG PIDG 26-16 ASSY</p> |
|  <p>TE Part # 59250<br/>T-HEAD PIDG 26-14 ASSY</p>    |  <p>TE Part # 58423-1<br/>DIE, RBY IS9252</p>                        |  <p>TE Part # 58433-3<br/>PRO CR ASSY, RBY IS9252</p>               |  <p>TE Part # 525690<br/>DAHT PG PIDG 20-18 ASSY</p>  |
|  <p>TE Part # 539691-2<br/>ERGO DIE R.B.Y</p>         |  <p>TE Part # 2063030-1<br/>SDE DIESET, RBY, UL</p>                  |  <p>TE Part # 47806-2<br/>DIES PIDG 22-16 DIE SET</p>               |  <p>TE Part # 59300<br/>T-HEAD PIDG PG 26-16 ASSY</p> |
|  <p>TE Part # 169400<br/>CERTI-LOK FRAME W/O DIES</p> |  <p>TE Part # 2392021-2<br/>RED BATTERY DAHT KIT 220V (47689-4)</p> |  <p>TE Part # 2392021-1<br/>RED BATTERY DAHT KIT 110V (47689-4)</p> |  <p>TE Part # 169404<br/>CERTI-LOK DIE</p>            |






Also in the Series | **PLASTI-GRIP**

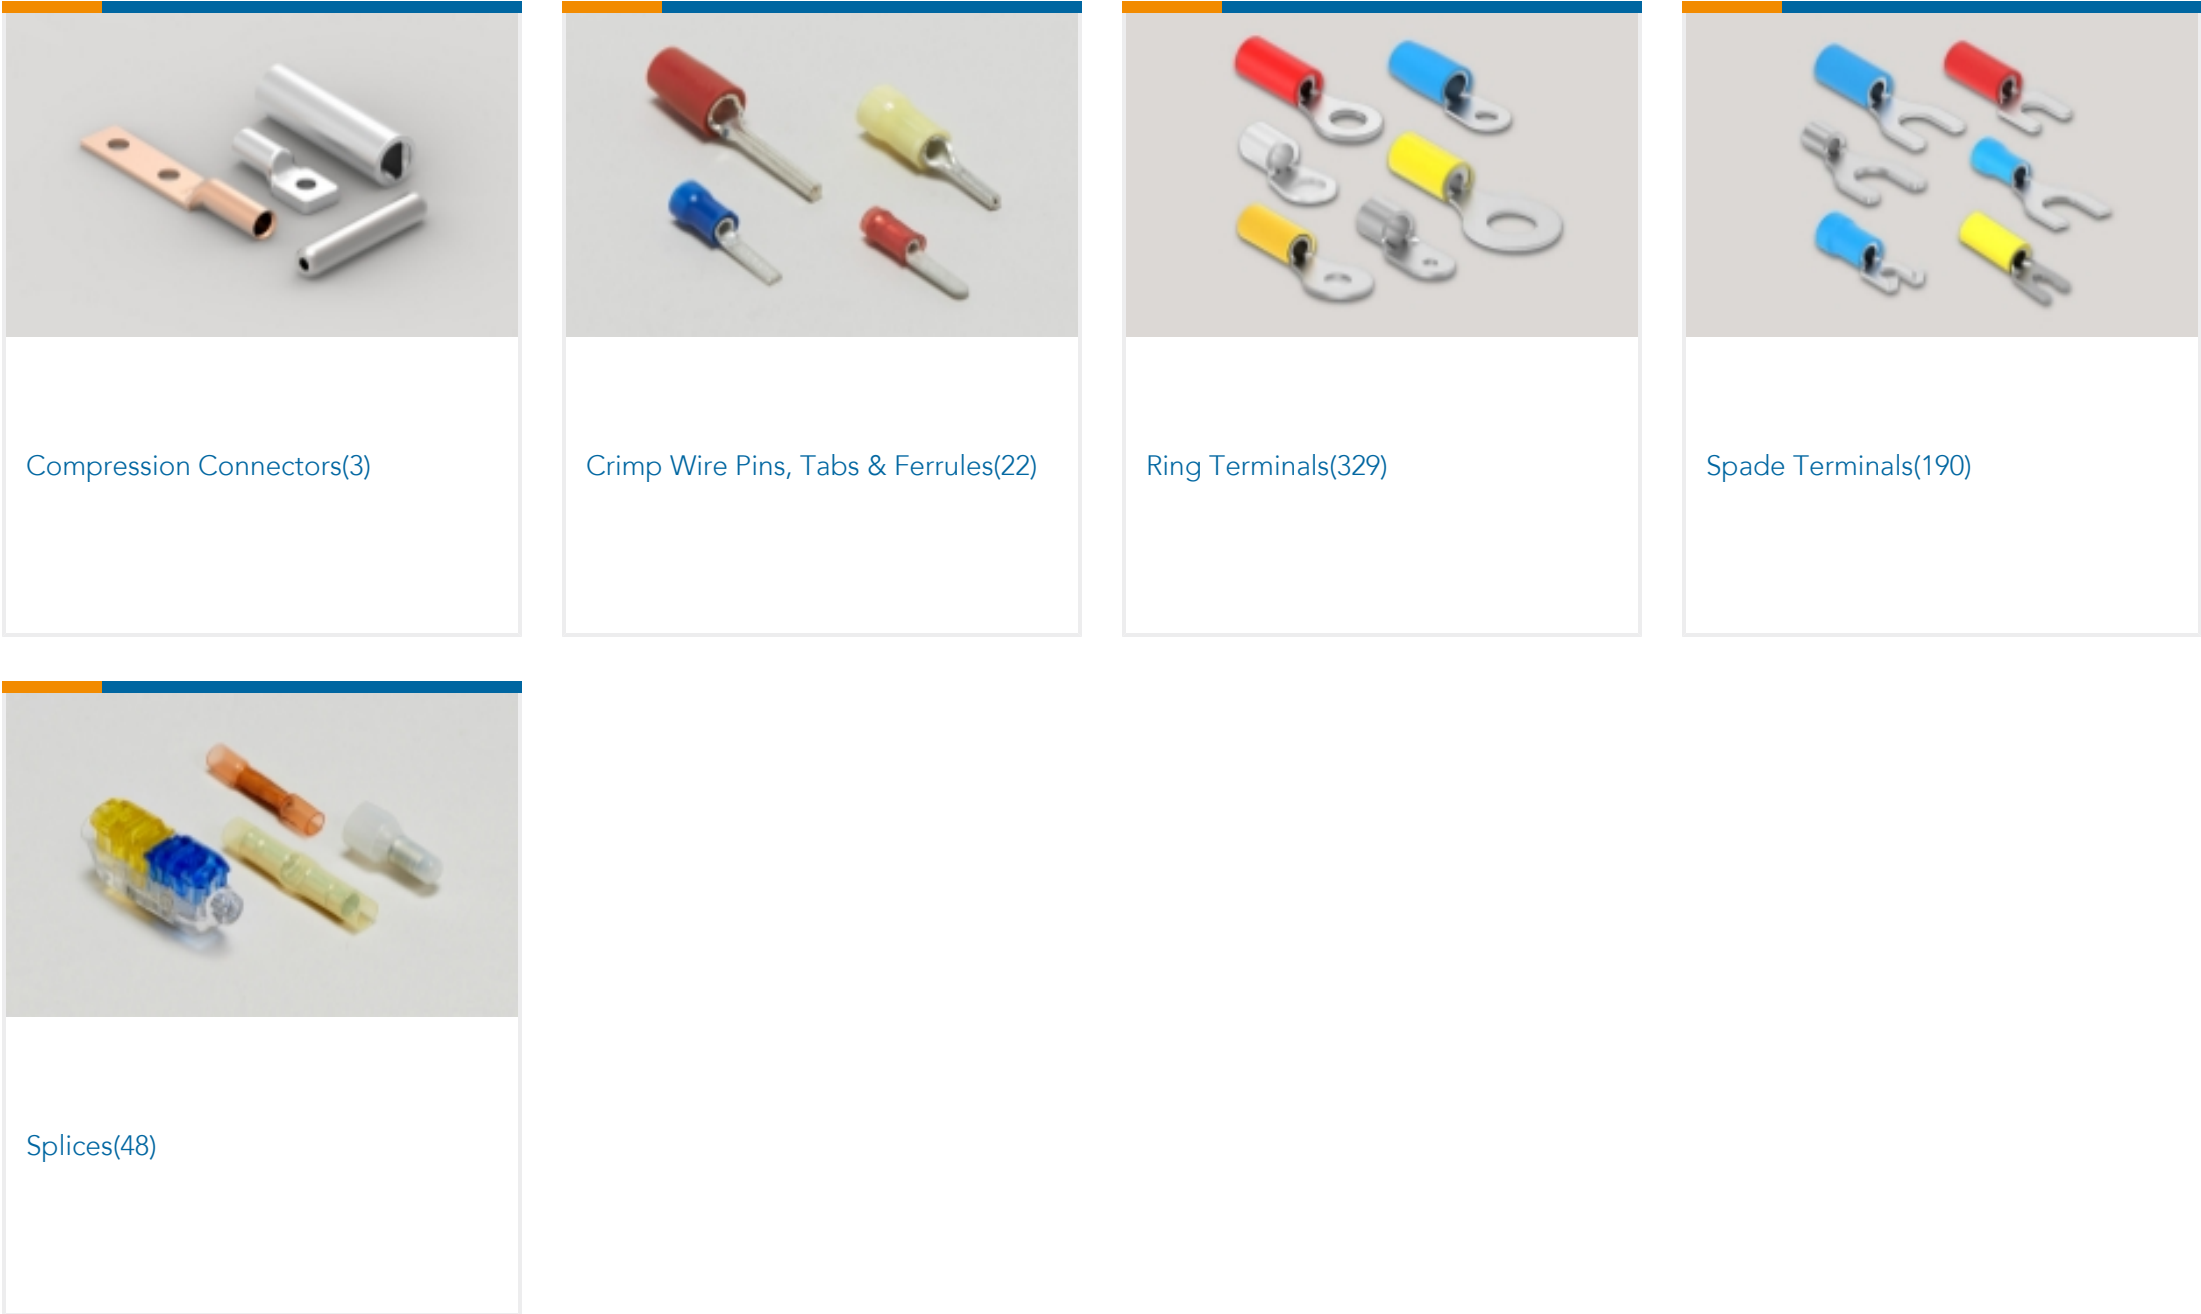

Customers Also Bought

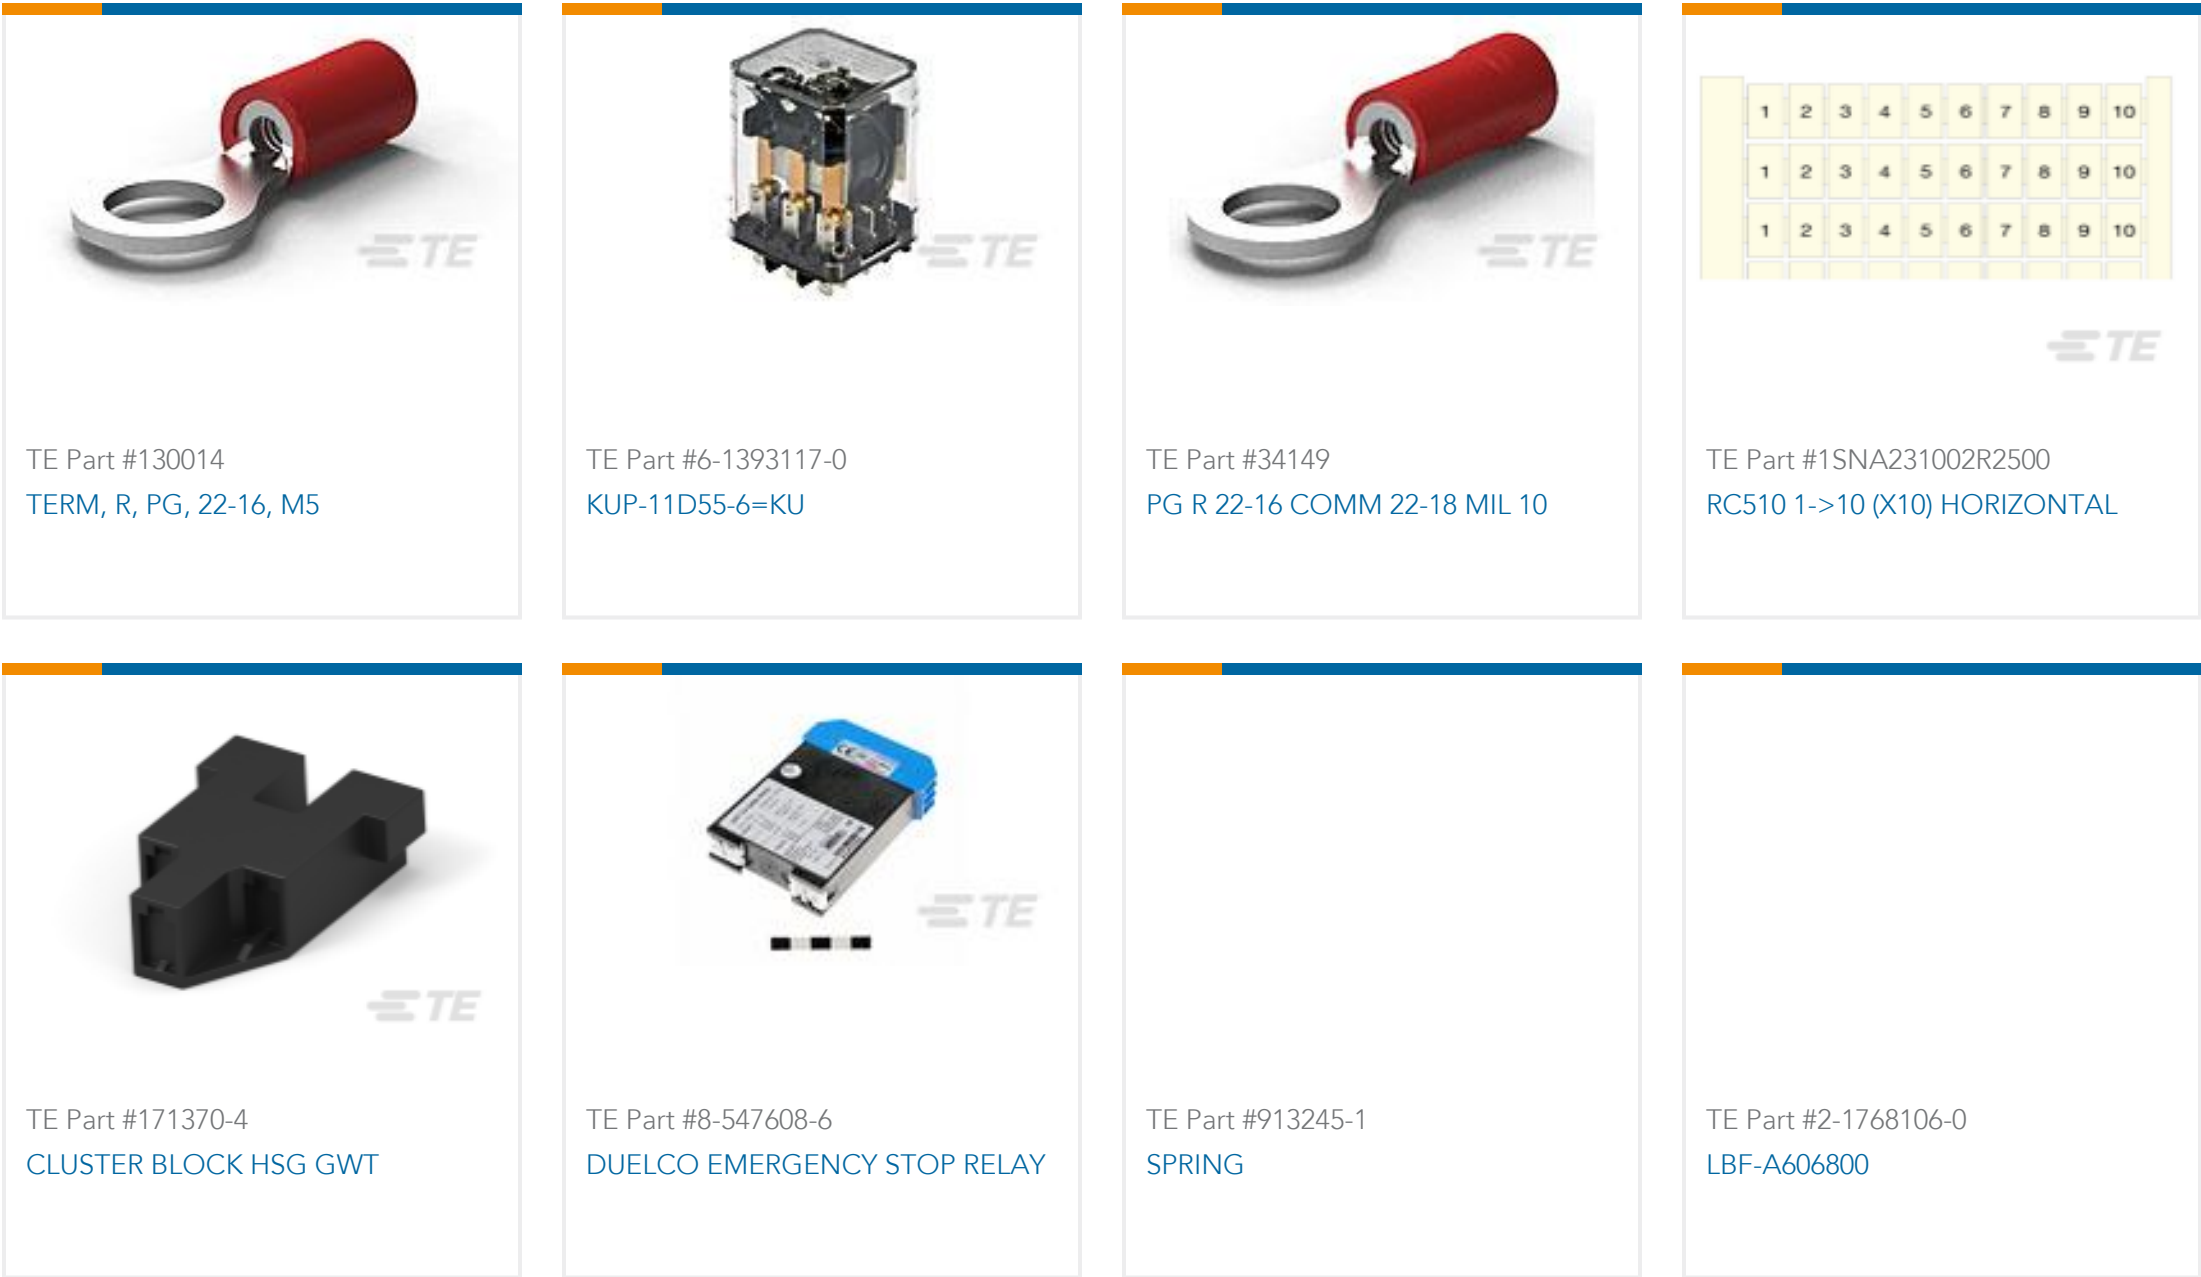





Documents

Product Drawings

PG R 22-16 COMM 22-18 MIL 8

English

CAD Files

Customer View Model

ENG\_CVM\_CVM\_34148\_T.2d\_dxf.zip

English

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_34148\_T.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_34148\_T.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

Application Specification

English

Product Environmental Compliance

MD\_34148\_07032017642\_dmtec

English

MD\_34148\_07032017642\_dmtec

English

Agency Approvals

UL Report

English

UL Report

English

UL Report

English

UL Report

34148

Closed Ring Tongue Terminal, 22 – 16 AWG, M4 / #8 Stud Size, 4.74 mm [.171 in]  
Stud Diameter, Closed Barrel, Straight, Tin, PLASTI-GRIP



English