



Wiha new products brochure 2011.



Valid from 1.3.2011

wiha 
Premium Tools

Wiha Content.

DynamicJoint



Maximum cutting performance

Up to **40%** less force
required for cutting

Long life – maximum cutting quality!

Optimal cutting results
even after 1,200 cuts!

Competition test
TÜV Süd (11/2009)



Wiha slimTECHNOLOGY

Maximum safety

Blades up to **33%**
narrower due to integrated
insulation

Unimpeded accessibility

VDE and GS tested

★ slimTorque VDE torque system –

a fully certified
VDE torque product line,
only available from Wiha.



★ SoftFinish® electric slimVario exchange bit system –

full access:
Wiha VDE bits up to 35% narrower than
comparable exchange blade systems.

★ **slimBits –**

suitable for slimVario
and TorqueVario®-S VDE
torque system.

★ **SoftFinish® electric slimFix**

Ideal VDE actuating tool
for spring clips:
no damage to clips thanks to
optimised wedge form.

Content

Wiha VDE tools:


Wiha slim family	6 – 9
slimTorque VDE torque system	10 – 15
slimVario	16 – 25
slimFix	26 – 27
Stripping tools	28 – 31

Non-VDE articles:

Screwdrivers	32 – 33
Reversible blade systems	34 – 35
Hex keys	36 – 39
Bits	40 – 41
Pliers	42 – 45

Wiha product innovations 2011.

VDE tools	
Wiha slim family Wiha SoftFinish® electric slimFix   3201: 4.5  3271: SL/PH1 SL/PH2  3581: Robertson 1 Robertson 2	
Wiha slimBits   2831-12: PZ1 PZ2  2831-13: SL/PH1 SL/PH2  2831-15: T8 T10 T15 T20 T25  2831-17: Robertson 1 Robertson 2	
Wiha slimBit packs   2831 B601: 2.5 3 4 5.5 PH1 PH2  2831 B602: 2.5 3 4 5.5 PZ1 PZ2  2831 B603: 2.5 3 4 5.5 SL/PZ1 SL/PZ2	
Wiha TorqueVario®-S VDE  2872: 0.6 – 2.0 Nm 2872: 1.0 – 5.0 Nm 2872: 2.0 – 8.0 Nm	
Wiha slimTorque kit   2879 B7: 4.0 5.5 PH1 PH2 PZ1 PZ2 slimTorque VDE bit holder	
Wiha slimTorque VDE bit holder, 2879 	

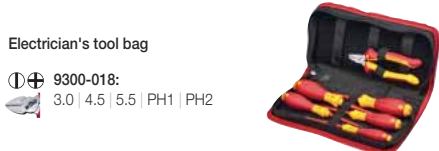VDE tools	
Wiha slimVario starter set   2831 T704: 7 pcs.  2831 T705: 7 pcs.  2831 T16: 16 pcs. 	
Wiha slimTorque starter set   2872 T9: 9 pcs.	
Wiha slim selection set   2872 T10: 10 pcs.	
Electrician's tool bag   9300-018: 3.0 4.5 5.5 PH1 PH2	
Stripping tools Stripping tool for coaxial cables  Stripping tool for round cables  Stripping knife for round cables  Stripping tool  Automatic stripping plier 	

Screwdriver

Wiha screwdriver
with mm scale

- ① 3021: 4.0
- ⊕ 3111: PH1
- ⊕ 3131: PZ1



32
32
33

Bits

Wiha bit holder, 7143L

- 100 mm
- 150 mm
- 200 mm



40

Reversible blade systems

Wiha SYSTEM 6

- ① 284: 8.0



35

Hex keys

ErgoStar
with scale (SW 10)

- 369S:
1,5 | 2 | 2,5 | 3 | 4
5 | 6 | 8 | 10



37 -
38

ProStar Stubby

- 369:
1,5 | 2 | 2,5 | 3 | 4
5 | 6 | 8 | 10



38

Set, 5 pcs.

- ⊙ 359:
3 | 4 | 5 | 6 | 8



39

Pliers

Mechanic's toolbags

- ① ⊕ 9300-019:
3.5 | 4.5 | 6.5 | PH1 | PH2



44

- ① ⊕ 9300-020:
3.5 | 4.5 | 6.5 | PH1 | PH2



45

Wiha Industrial Z 21 0 02

- 180 mm
- 300 mm



42

Wiha Industrial Z 22 0 02

- 180 mm
- 300 mm



42

Wiha Industrial Z 17 0 02

- 160 mm
- 180 mm
- 200 mm



43

Wiha slim family

The innovation for VDE fastening tools.



- Unimpeded accessibility
- VDE and GS certified
- Maximum safety



slimTECHNOLOGY
from Wiha:



slimFix

- Actuating tool for spring clips (wedge-profiled output geometry)
- Effortless access to low-lying fastening and spring elements

slimVario

Compact VDE bit sets:
holder + slimBit (length 90 mm)

- 35% lighter than comparable sets
- Maximum service life: metal locking mechanism
- Precise work – additional guidance with free-running sleeve


slimTorque

The world's only VDE torque screwdriver:

Controlled tightening of electrical screw connections with slimBits



slimFix
SoftFinish® electric

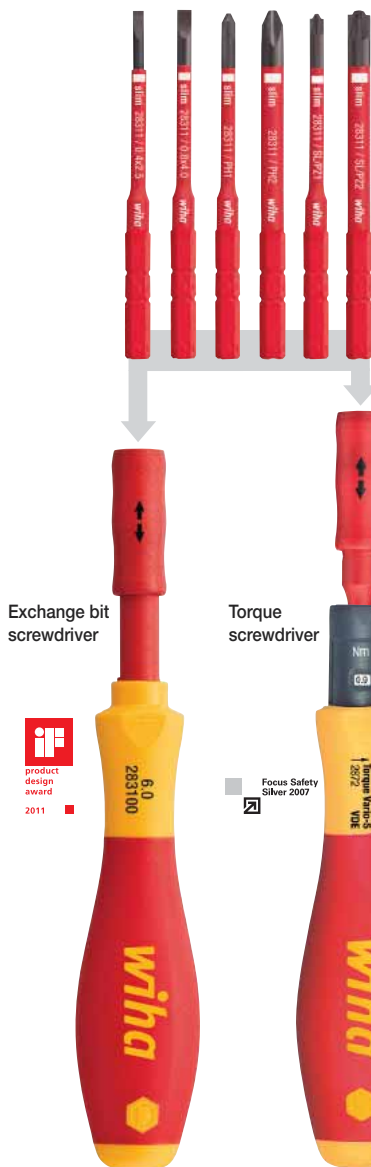


slimVario
VDE exchange bit system



slimTorque
VDE torque system

Blades up to
33% narrower
due to integrated
insulation.

The right set for any application:

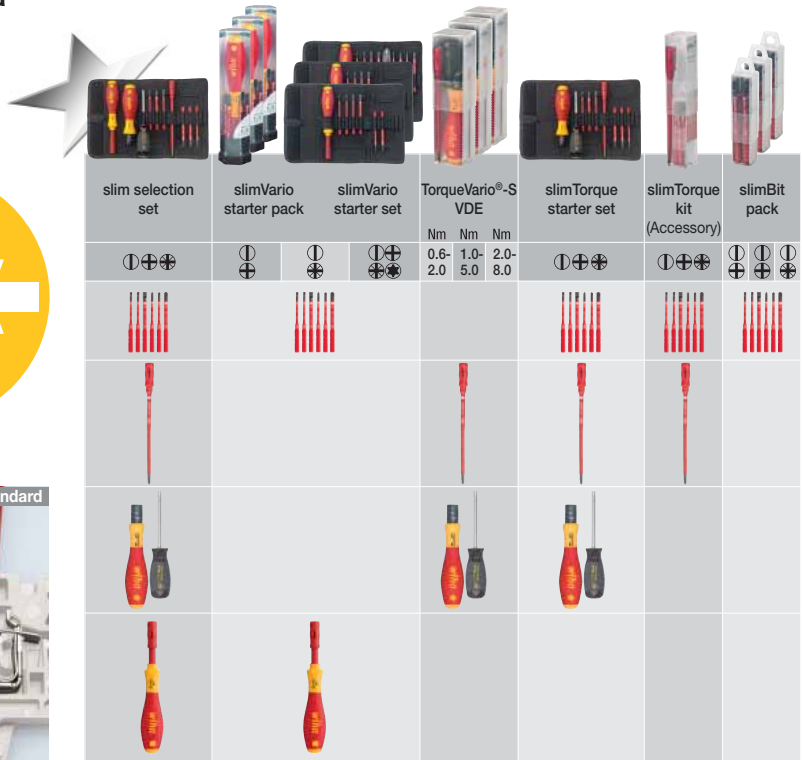


	Slotted							Phillips		Pozidriv		Xeno				TORX®					Robertson	
	2.5	3.0	3.5	4.0	4.5	5.5	6.5	PH1	PH2	PZ1	PZ2	SL/PH1	SL/PH2	SL/PZ1	SL/PZ2	T8	T10	T15	T20	T25	1	2
slimVario / slimTorque	●	●		●		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
slimFix			●	●	●	●	●	●	●	●	●	●	●								●	●

Wiha slim family

SoftFinish® electric slimVario and slimTorque set.

Everything
in one –
slim Selection!

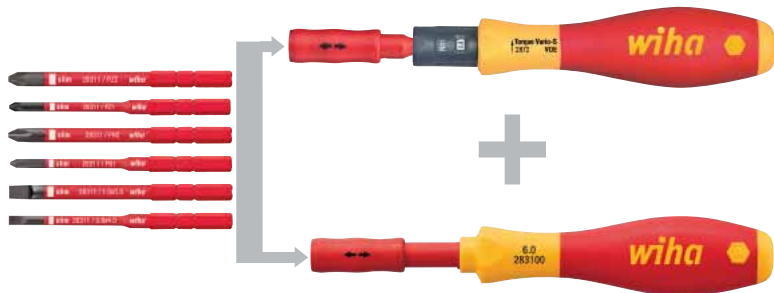

slimTorque
VDE
torque
system

slimVario
VDE
exchange
bit system



AC 1000V
 IEC 60900:2004

2872 T10

slim selection set, 10 pcs.

**Complete VDE set with torque screwdriver,
bit holder and slimBits.**

Slotted/ Phillips/ Pozidriv.

- Handles:** VDE torque handle 1.0 – 5.0 Nm, steplessly adjustable.
 Bit holder with SoftFinish® electric multi-component handle.
- Bit mount:** ClicFix quick release holder securely locks bits.
 Only for 6 mm slimBits.
- Bits:** Protective insulation moulded directly onto the bit,
 completely integrated into the bit in the lower area.
 Individually tested protective isolation 1000 V AC, VDE and GS-tested.
- Application:** For controlled fastening with live
 parts up to 1000 V AC.
- Extra:** 100% safety by achieving the switchgear manufacturers exact torque
 requirements and complying with the type-tested standards EN 60439-1.
 Effortless access to low-lying fastening elements.
 Arranged clearly in a high quality, rugged and durable bag.

Order No.	Series		£/pc.	NEW
36078 8	2872 T10	1	136.94	✓
	2872	TorqueVario®-S VDE torque screwdriver, Model 1.0 – 5.0 Nm		
	2831-00	SoftFinish® electric slimVario bit holder		
	2879	slimTorque VDE bit holder		
	285-900	Torque-Setter		
①	2831-10	4.0 x 90	5.5 x 90	
⊕	2831-11	PH1 x 90	PH2 x 90	
⊕	2831-12	PZ1 x 90	PZ2 x 90	

Wiha slimTECHNOLOGY

slimTorque VDE torque system.



slimTECHNOLOGY
from Wiha:




slimTorque

The world's only VDE torque screwdriver:

- Controlled tightening of electrical screw connections with slimBits
- Maximum service life: metal locking mechanism
- Precise work – additional guidance with free-running sleeve

- Unimpeded accessibility
- VDE and GS certified
- Maximum safety

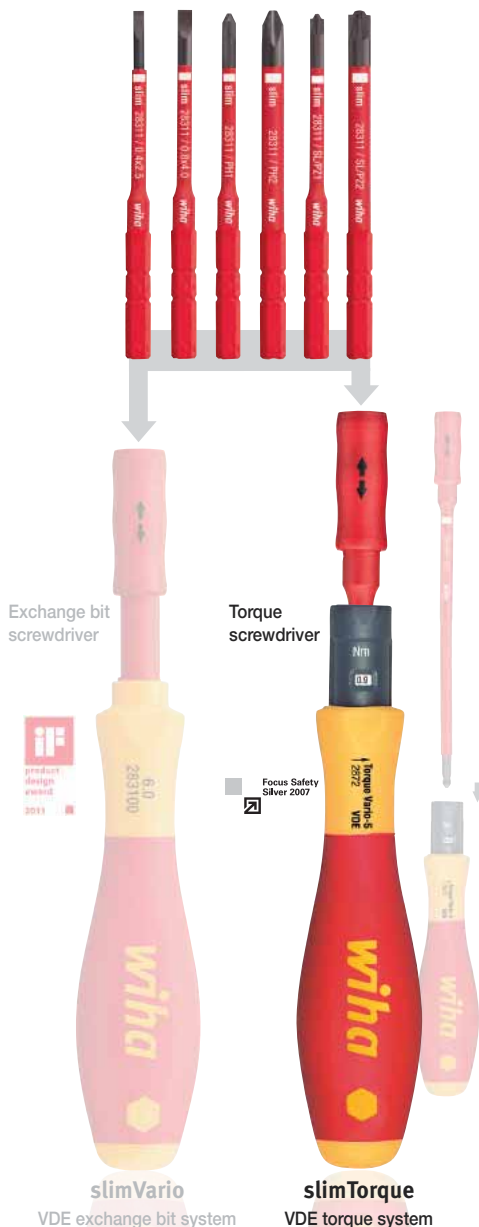



AC 1000V
IEC 60900:2004

2879

slimTorque VDE bit holder for 6 mm slimBits.
Protective isolation 1000 VAC, GS inspected.
Exclusively for Wiha VDE torque screwdrivers.

Blade: High-quality chrome-vanadium molybdenum steel, through-hardened, bronzed.

Protective insulation moulded directly onto the blade.

Bit mount: ClicFix quick release holder securely locks bits.
Only for 6 mm slimBits.

Standards: Manufactured according to IEC 60900:2004, individually tested at 10,000 volts.

Application: For use of Wiha 6 mm slimBits with
Wiha VDE torque screwdrivers.

Attention: Not for use with bit styles C 6.3 and E 6.3.

Order No.	Ø	Hex	Length	Weight	Material	£/pc.	
35870 9	6	3.8	170	13	5	11.40	NEW ✓



Wiha slimTECHNOLOGY

slimTorque VDE torque system.






AC 1000V
IEC 60900:2004

2872

TorqueVario®-S VDE torque screwdriver.

Insulation up to 1000 V AC, GS-mark.

Torque value can be set via window scale.

Automatic release.

Handle: Torque infinitely adjustable with Torque-Setter setting tool (also supplied).
Ergonomic multi-component handle, insulation up to 1000 V AC, GS mark.

Handle sizes proportioned to optimise torque setting.

Audible and perceptible click when the pre-set torque has been attained.

Bit holder: slimTorque VDE bit holder (included in delivery) for 6 mm slimBits.

Standards: Manufactured acc. to IEC 60900:2004.

EN ISO 6798, BS EN 26789, ASME B107.14M.

Accuracy: ±6%, traceable to national standards.

Application: For electrical applications up to 1000 V AC where recommended torque settings are important.

Use in combination with a Wiha torque VDE interchangeable blade.

Extra: Delivered in practical plastic box, incl. factory calibration certificate.

Order No.	Nm	⌀	→	↕	—	£/pc.
26625 7	0.6-2.0	3.8	131	30	1	113.22
26626 4	1.0-5.0	3.8	138	36	1	117.81
26627 1	2.0-8.0	3.8	142	41	1	125.46



2879 B7

slimTorque kit, 7 pcs.

With slimTorque VDE bit holder for 6 mm slimBits.

Bit holder: ClicFix quick release holder securely locks bits.

Only for 6 mm slimBits.

Bits: Protective insulation moulded directly onto the bit, completely integrated into the bit in the lower area.

Extra: Individually tested protective isolation 1000 V AC, VDE and GS-tested.

Application: Set for starting Wiha slimTECHNOLOGY, for existing TorqueVario®-S VDE torque screwdriver.

Order No.	Series		£/pc.	NEW
36079 5	2879 B7	1	36.64	
	2879	slimTorque VDE bit holder for 6 mm slimBits		✓
⓪	2831-10	4.0 x 90	5.5 x 90	
⊕	2831-11	PH1 x 90	PH2 x 90	
⊕	2831-12	PZ1 x 90	PZ2 x 90	

Wiha slimTECHNOLOGY

slimTorque VDE sets.



AC 1000V
IEC 60900:2004

2872 T9


slimTorque starter set, 9 pcs.

Torque value can be set via a window scale.

With slimTorque VDE bit holder for 6 mm slimBits.

- Handle:** VDE torque handle 1.0 – 5.0 Nm, steplessly adjustable with Torque Setter adjusting tool (included in delivery).
- Bit holder:** ClicFix quick release holder securely locks bits. Only for 6 mm slimBits.
- Bits:** Protective insulation moulded directly onto the bit, completely integrated into the bit in the lower area. Individually tested protective isolation 1000 V AC, VDE and GS-tested.
- Application:** For controlled fastening with live parts up to 1000 V AC.
- Extra:** 100% safety by achieving the switchgear manufacturers exact torque requirements and complying with the type-tested standards EN 60439-1. Effortless access to low-lying fastening elements. Arranged clearly in a high quality, rugged and durable bag.

Order No.	Series		£/pc.	NEW
36080 1	2872 T9		1 133.88	✓
	2872	TorqueVario®-S VDE torque screwdriver, Model 1.0 – 5.0 Nm		
	2879	slimTorque VDE bit holder		
	285-900	Torque-Setter		
①	2831-10	4.0 x 90 5.5 x 90		
⊕	2831-11	PH1 x 90 PH2 x 90		
⊕	2831-12	PZ1 x 90 PZ2 x 90		



AC 1000V
IEC 60900:2004

2872 T10

slim selection set, 10 pcs.

Complete VDE set with torque screwdriver, bit holder and slimBits. Slotted/ Phillips/ Pozidriv.

- Handles:** VDE torque handle 1.0 – 5.0 Nm, steplessly adjustable.
Bit holder with SoftFinish® electric multi-component handle.
- Bit mount:** ClicFix quick release holder securely locks bits.
the bit in the lower area.
- Bits:** Protective insulation moulded directly onto the bit,
completely integrated into the bit in the lower area.
Individually tested protective isolation 1000 V AC, VDE and GS-tested.
- Application:** For controlled fastening with live
parts up to 1000 V AC.
- Extra:** 100% safety by achieving the switchgear manufacturers exact torque
requirements and complying with the type-tested standards EN 60439-1.
Effortless access to low-lying fastening elements.
Arranged clearly in a high quality, rugged and durable bag.

Order No.	Series		£/pc.	NEW
36078 8	2872 T10		1 136.94	✓
	2872	TorqueVario®-S VDE torque screwdriver, Model 1.0 – 5.0 Nm		
	2831-00	SoftFinish® electric slimVario bit holder		
	2879	slimTorque VDE bit holder		
	285-900	Torque-Setter		
①	2831-10	4.0 x 90 5.5 x 90		
⊕	2831-11	PH1 x 90 PH2 x 90		
⊕	2831-12	PZ1 x 90 PZ2 x 90		

Wiha slimTECHNOLOGY

SoftFinish® electric slimVario and slimBits.



AC 1000V
IEC 60900:2004

2831-00

**SoftFinish® electric slimVario bit holder
with handle and ClicFix, 6.0 mm.**

- Blade:** Chrome-vanadium steel, through-hardened.
Insulation moulded directly onto blade.
- Handle:** Wiha SoftFinish® electric multi-component handle with roll-off protection.
- Bit mount:** ClicFix quick release holder securely locks bits.
Only for 6 mm slimBits.
- Application:** Compact screwdriver together with VDE exchange bits.
- Attention:** **Not for use with bit styles C 6.3 and E 6.3.**

Order No.	Ø	30	50	160	5	£/pc.
34577 8	6					18.47



AC 1000V
IEC 60900:2004

2831-10

SoftFinish® electric slimBit, slotted.
Individually tested protective isolation 1000 V AC, VDE and GS-tested.

- Standards:** Manufactured acc. to IEC 60900:2004.
- Material:** High-quality chrome vanadium steel, through-hardened, bronzed.
Protective insulation moulded directly onto the bit and completely integrated into the blade in the lower area from size 4.0.
- Application:** For all work on or around electrical components up to 1000 V AC.
- Extra:** The integrated protective insulation enables low-lying fastening and spring elements to be reached and manipulated.
The slim form of the bit allows easy reaching of the screws below the finger and hand guards.
- Attention:** **6 mm slimBits are only for use with slimVario bit holder and slimTorque VDE bit holder (VDE torque system).**

Order No.	Ø	90	0.4	6.0	no slim version	1	£/pc.
34578 5	2.5						4.16
34579 2	3.0						4.16
34580 8	4.0						4.86
34581 5	5.5						4.86
34582 2	6.5						4.86



AC 1000V
IEC 60900:2004

2831-11 SoftFinish® electric slimBit, Phillips.

Individually tested protective isolation 1000 V AC, VDE and GS-tested.

Material: Protective insulation moulded directly onto the bit and completely integrated into the blade.

Order No.	+	↔	⦿		£/pc.
34583 9	PH1	90	6.0	1	4.86
34584 6	PH2	90	6.0	1	4.86



AC 1000V
IEC 60900:2004

2831-12 SoftFinish® electric slimBit, Pozidriv.

Individually tested protective isolation 1000 V AC, VDE and GS-tested.

Order No.	+	↔	⦿		£/pc.	NEW
34585 3	PZ1	90	6.0	1	4.86	✓
34586 0	PZ2	90	6.0	1	4.86	✓



AC 1000V
IEC 60900:2004

2831-13 SoftFinish® electric slimBit, Xeno, for terminal screws (slotted/ Phillips).

Individually tested protective isolation 1000 V AC, VDE and GS-tested.

Order No.	+	↔	⦿		£/pc.	NEW
34587 7	SL/PH1	90	6.0	1	5.55	✓
34588 4	SL/PH2	90	6.0	1	5.55	✓

Wiha slimTECHNOLOGY

SoftFinish® electric slimVario and slimBits.



AC 1000V
IEC 60900:2004


2831-14

SoftFinish® electric slimBit, Xeno, for terminal screws
(slotted/ Pozidriv).

Individually tested protective isolation 1000 V AC, VDE and GS-tested.

Material: Protective insulation moulded directly onto the bit and
completely integrated into the blade.

Order No.					£/pc.
34589 1	SL/PZ1	90	6.0	1	5.55
34590 7	SL/PZ2	90	6.0	1	5.55



AC 1000V
IEC 60900:2004

2831-15

SoftFinish® electric slimBit, TORX®.

Individually tested protective isolation 1000 V AC, VDE and GS-tested.

Order No.					£/pc.	NEW
35506 7	T8	90	6.0	1	5.38	✓
35507 4	T10	90	6.0	1	5.38	✓
35508 1	T15	90	6.0	1	5.38	✓
35509 8	T20	90	6.0	1	5.38	✓
36071 9	T25	90	6.0	1	5.38	✓



AC 1000V
IEC 60900:2004

2831-17

SoftFinish® electric slimBit, square (Robertson).

Individually tested protective isolation 1000 V AC, VDE and GS-tested.

Order No.					£/pc.	NEW
35510 4	Robertson 1	2.3	90	6.0	5.98	✓
35511 1	Robertson 2	2.8	90	6.0	5.98	✓



AC 1000V
IEC 60900:2004



2831 B601 slimBit pack, slotted/ Phillips, 6 pcs.

Bits: High-quality chrome-vanadium molybdenum steel, through-hardened, bronzed. Protective insulation moulded directly onto the bit, completely integrated into the bit in the lower area.

Individually tested protective isolation 1000 V AC, VDE and GS-tested.

Application: For all work on or around electrical components up to 1000 V AC.

Attention: 6 mm slimBits are only for use with slimVario bit holder and slimTorque VDE bit holder (VDE torque system).

Order No.	Series		£/pc.	NEW
36088 7	2831 B601	1	25.92	✓
Ⓢ	2831-10	1x2.5 1x3.0 1x4.0 1x5.5		
⊕	2831-11	1xPH1 1xPH2		



AC 1000V
IEC 60900:2004



2831 B602 slimBit pack, slotted/ Pozidriv, 6 pcs.

Order No.	Series		£/pc.	NEW
36089 4	2831 B602	1	25.92	✓
Ⓢ	2831-10	1x2.5 1x3.0 1x4.0 1x5.5		
⊕	2831-12	1xPZ1 1xPZ2		



AC 1000V
IEC 60900:2004



2831 B603 slimBit pack, slotted/ Xeno (slotted/ Pozidriv), 6 pcs.

Order No.	Series		£/pc.	NEW
36090 0	2831 B603	1	27.66	✓
Ⓢ	2831-10	1x2.5 1x3.0 1x4.0 1x5.5		
⊕	2831-14	1xSL/PZ1 1xSL/PZ2		

Wiha slimTECHNOLOGY

SoftFinish® electric slimVario and slimBits.



2831 T701

AC 1000V
IEC 60900:2004

**slimVario starter pack,
slotted/ Phillips, 7 pcs.**

- Bits:** High-quality chrome vanadium steel, through-hardened, bronzed.
Protective insulation moulded directly onto the bit and completely integrated into the blade in the lower area.
Individually tested protective isolation 1000 V AC, VDE and GS-tested.
- Holder:** Wiha SoftFinish® electric multi-component handle with roll-off protection.
Compact screwdriver together with the slimBits.
- Application:** For all work on or around electrical components up to 1000 V AC.
- Extra:** The integrated protective insulation enables low-lying fastening and spring elements to be reached and manipulated.
The slim form of the bit allows easy reaching of the screws below the finger and hand guards.

Order No.	Series					£/pc.
34733 8	2831 T701				1	44.13
Ⓢ	2831-10	1x3.0	1x4.0	1x5.5	1x6.5	
⊕	2831-11	1xPH1	1xPH2			
	2831-00	SoftFinish® electric slimVario bit holder				



Up to **33%**
narrower
VDE blades



 **AC 1000V**
IEC 60900:2004

2831 T702 slimVario starter pack,
slotted/ Phillips, 7 pcs.

Order No.	Series						£/pc.
34734 5	2831 T702					1	43.26
Ⓢ	2831-10	1x2.5	1x3.0	1x4.0	1x5.5		
⊕	2831-11	1xPH1	1xPH2				
	2831-00	SoftFinish® electric slimVario bit holder					



 **AC 1000V**
IEC 60900:2004

2831 T703 slimVario starter pack,
slotted/ Xeno (slotted/ Pozidriv), 7 pcs.

Order No.	Series						£/pc.
34735 2	2831 T703					1	45.00
Ⓢ	2831-10	1x3.0	1x4.0	1x5.5	1x6.5		
⊕	2831-14	1xSL/PZ1	1xSL/PZ2				
	2831-00	SoftFinish® electric slimVario bit holder					



Wiha slimTECHNOLOGY

SoftFinish® electric slimVario sets.



AC 1000V
IEC 60900:2004

2831 T704

slimVario starter set, 7 pcs.

Popular slimBits in a bag.

Slotted/ Phillips.

Bits: High-quality chrome vanadium steel, through-hardened, bronzed.

Protective insulation moulded directly onto the bit, completely integrated into the blade in the lower area.

Individually tested protective isolation 1000 V AC, VDE and GS-tested.

Bit mount: ClicFix quick release holder securely locks bits.

Only for 6 mm slimBits.

Handle: Wiha SoftFinish® electric multi-component handle with roll-off protection.

Application: For all work on or around electrical components up to 1000 V AC.

Extra: Effortless access to low-lying fastening elements.

Arranged clearly in a high quality, rugged and durable bag.

Order No.	Series		£/pc.	NEW
36069 6	2831 T704		1 47.69	✓
①	2831-10	1x2.5 1x3.0 1x4.0 1x5.5		
⊕	2831-11	1xPH1 1xPH2		
	2831-00	SoftFinish® electric slimVario bit holder		



AC 1000V
IEC 60900:2004

2831 T705

slimVario starter set, 7 pcs.

Popular slimBits in a bag.

Slotted/ Pozidriv.

- Bits:** High-quality chrome vanadium steel, through-hardened, bronzed.
Protective insulation moulded directly onto the bit, completely integrated into the blade in the lower area.
Individually tested protective isolation 1000 V AC, VDE and GS-tested.
- Bit mount:** ClicFix quick release holder securely locks bits.
Only for 6 mm slimBits.
- Handle:** Wiha SoftFinish® electric multi-component handle with roll-off protection.
- Application:** For all work on or around electrical components up to 1000 V AC.
- Extra:** Effortless access to low-lying fastening elements.
Arranged clearly in a high quality, rugged and durable bag.



Order No.	Series		£/pc.	NEW
36070 2	2831 T705	1	47.69	✓
①	2831-10	1x2.5 1x3.0 1x4.0 1x5.5		
⊕	2831-12	1xPZ1 1xPZ2		
	2831-00	SoftFinish® electric slimVario bit holder		

Wiha slimTECHNOLOGY

SoftFinish® electric slimVario sets.



2831 T16

slimVario starter set, 16 pcs.

All commonly used slimBits in a bag.

Slotted/ Phillips/ Pozidriv/ Pozidriv Xeno/ TORX®.

- Bits:** High-quality chrome vanadium steel, through-hardened, bronzed.
Protective insulation moulded directly onto the bit, completely integrated into the blade in the lower area.
Individually tested protective isolation 1000 V AC, VDE and GS-tested.
- Bit mount:** ClicFix quick release holder securely locks bits.
Only for 6 mm slimBits.
- Handle:** Wiha SoftFinish® electric multi-component handle with roll-off protection.
- Application:** For all work on or around electrical components up to 1000 V AC.
- Extra:** Effortless access to low-lying fastening elements.
Arranged clearly in a high quality, rugged and durable bag.
SoftFinish® voltage tester 110 – 250 V.

Order No.	Series		£/pc.	NEW
36068 9	2831 T16		1 59.80	✓
①	2831-10	1x2.5 1x3.0 1x4.0 1x5.5		
⊕	2831-11	1xPH1 1xPH2		
⊕	2831-12	1xPZ1 1xPZ2		
⊕	2831-14	1xSL/PZ1 1xSL/PZ2		
✱	2831-15	1xT10 1xT15 1xT20 1xT25		
	2831-00	SoftFinish® electric slimVario bit holder		
	255-11	SoftFinish® voltage tester 110 – 250 V		



AC 1000V
IEC 60900:2004

2872 T10

slim selection set, 10 pcs.

**Complete VDE set with torque screwdriver,
bit holder and slimBits. Slotted/ Phillips/ Pozidriv.**

- Handles:** VDE torque handle 1.0 – 5.0 Nm, steplessly adjustable.
Bit holder with SoftFinish® electric multi-component handle.
- Bit mount:** ClicFix quick release holder securely locks bits.
Only for 6 mm slimBits.
- Bits:** Protective insulation moulded directly onto the bit,
completely integrated into the bit in the lower area.
Individually tested protective isolation 1000 V AC, VDE and GS-tested.
- Application:** For controlled fastening with live
parts up to 1000 V AC.
- Extra:** 100% safety by achieving the switchgear manufacturers exact torque
requirements and complying with the type-tested standards EN 60439-1.
Effortless access to low-lying fastening elements.
Arranged clearly in a high quality, rugged and durable bag.

Order No.	Series		£/pc.	NEW
36078 8	2872 T10		1 136.94	✓
	2872	TorqueVario®-S VDE torque screwdriver, Model 1.0 – 5.0 Nm		
	2831-00	SoftFinish® electric slimVario bit holder		
	2879	slimTorque VDE bit holder		
	285-900	Torque-Setter		
①	2831-10	4.0 x 90 5.5 x 90		
⊕	2831-11	PH1 x 90 PH2 x 90		
⊕	2831-12	PZ1 x 90 PZ2 x 90		

Wiha slimTECHNOLOGY

SoftFinish® electric slimFix.



AC 1000V
IEC 60900:2004

3201

SoftFinish® electric slimFix slotted screwdriver.

Individually tested protective isolation 1000 V AC, VDE and GS-tested.

- Blade:** High quality chrome-vanadium-molybdenum steel, through hardened, black-finish. Protective insulation moulded directly onto the blade and completely integrated into the blade in the lower area.
- Handle:** Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.
- Standards:** DIN ISO 2380. Manufactured acc. to IEC 60900:2004.
- Application:** For all work on or around electrical components up to 1000 V AC.
- Extra:** The integrated protective insulation enables low-lying fastening and spring elements to be reached and manipulated.



Order No.	①	↔	⊖	↔	↔	↔	£/pc.	NEW
35446 6	3.5	100	0.6	204	23	10	6.89	
35390 2	4.0	100	0.8	211	30	10	8.19	
35501 2	4.5	125	1.0	236	30	10	9.06	✓
35391 9	5.5	125	1.0	243	36	10	9.93	
35392 6	6.5	150	1.2	268	36	10	12.87	



AC 1000V
IEC 60900:2004

3211

SoftFinish® electric slimFix Phillips screwdriver.

Individually tested protective isolation 1000 V AC, VDE and GS-tested.

Order No.	⊕	↔	↔	↔	↔	£/pc.
35393 3	PH1	80	191	30	10	9.19
35394 0	PH2	100	218	36	10	12.35



AC 1000V
IEC 60900:2004

3241

SoftFinish® electric slimFix Pozidriv screwdriver.

Individually tested protective isolation 1000 V AC, VDE and GS-tested.

Order No.	⊕	↔	↔	↔	↔	£/pc.
35395 7	PZ1	80	191	30	10	10.14
35396 4	PZ2	100	218	36	10	13.87





AC 1000V
IEC 60900:2004

3271

SoftFinish® electric slimFix Xeno.

For terminal screws (slotted/ Phillips).

Individually tested protective isolation 1000 V AC, VDE and GS-tested.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, black-finish. Protective insulation moulded directly onto the blade and completely integrated into the blade in the lower area.

Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.

Standards: Manufactured acc. to IEC 60900:2004.

Application: For all work on or around electrical components up to 1000 V AC.

Extra: The integrated protective insulation enables low-lying fastening and spring elements to be reached and manipulated.



Order No.	+					£/pc.	NEW
35502 9	SL/PH1	80	191	30	10	9.97	✓
35503 6	SL/PH2	100	218	36	10	13.35	✓



AC 1000V
IEC 60900:2004

3581

SoftFinish® electric slimFix square (Robertson) screwdriver.

Individually tested protective isolation 1000 V AC, VDE and GS-tested.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, black-finish. Protective insulation moulded directly onto the blade and completely integrated into the blade in the lower area.

Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.

Standards: Manufactured acc. to IEC 60900:2004.

Application: For all work on or around electrical components up to 1000 V AC.

Extra: The integrated protective insulation enables low-lying fastening and spring elements to be reached and manipulated.



Order No.							£/pc.	NEW
35504 3	Robertson 1	2.3	100	211	30	10	12.22	✓
35505 0	Robertson 2	2.8	125	243	36	10	14.05	✓

Wiha stripping tools

Cable processing.



24676SB Stripping tool for coaxial cables.

Blister packed.

Design: Double layered, folding stripping tool with opening spring and locking mechanism.

Setting of cutting depth not required.

Extra-long tool body for optimal handling.

With 5.0 – 20.0 mm length scale.

Material: Housing of glass-fibre reinforced polyamide.

Application: Incremental stripping of all commonly used coaxial cables

(e.g. antenna and transmission cables) from 4.8 – 7.5 mm outer diameter.

Also suitable for stripping of round cables

(e.g. NYM 3 x 0.75 mm², PVC flex 10 mm² and 16mm²).

Order No.	mm	in	Ø mm			£/pc.	
36051 1	110	4 1/4	4.8 – 7.5	30	1	14.46	NEW ✓



24677SB Stripping tool for round cables.

Blister packed.

Design: Double layered, folding stripping tool with opening spring and locking mechanism.

Setting of cutting depth not required.

Ergonomically designed tool body for non-slip, safe work.

Material: Housing of glass-fibre reinforced polyamide.

Application: Flush stripping of round and damp-proof cable from ø 8 – 13 mm

(e.g. NYM 3 x 1.5 mm² to 5 x 2.5 mm²), also for hard-to-reach locations

e.g. ceiling and wall areas, in junction boxes, distribution boxes,

switch cabinets etc.

Order No.	mm	in	Ø mm			£/pc.	
36052 8	125	5	8 – 13	45	1	14.73	NEW ✓



2462202SB Stripping tool.
Blister packed.

- Design:** Convenient stripping with steplessly adjustable cutting depth via setting screw and self-rotating inner knife.
Damage to inner conductors is therefore impossible.
Self-tensioning fixing bracket for safe cable routing.
With knife and hooked blade incl. safety cap for transport and storage.
Spare blade in the tool.
Ergonomically designed tool body.
- Material:** Impact resistant plastic housing of glass-fibre reinforced polyamide.
Hooked blade and knife of hardened steel.
- Application:** Precise, rapid and safe stripping of all commonly used round cable from $\varnothing$ 4 mm – 28 mm.
Self-rotating inner knife for round and length cutting.

Order No.	↔ mm	↔ in	Ø mm		£/pc.	NEW
35538 8	165	6 1/2	4.0 – 28	1	13.37	✓



24678SB Stripping knife for round cables.
Blister packed.

- Standards:** Manufactured acc. to IEC 60900:2004.
- Design:** Robust, fixed, sickle-shaped hooked blade.
Shoe-shaped blade tip limits the cutting depth and prevents damage to conductors.
Protective cap for safe transport and protection of cutting edges.
- Material:** Insulating multi-component handle. Blade of hardened, non-rusting steel.
- Application:** For stripping of thick cable types and cutting of various multi-sheathed cable layers.
For all work on or around electrical components up to 1000 V AC.

Order No.	↔ mm	↔ in			£/pc.	NEW
36053 5	200	8	120	1	22.74	✓

Wiha stripping tools

Cable processing.



24675SB Automatic stripping pliers. Blister packed.

Design:

Automatic setting to various conductor diameters.
 Settable length stop from 5 - 12 mm, can be removed if required.
 Integrated, easily accessible wire cutter.
 Light, ergonomically designed tool body with narrow head
 for optimal use in hard-to-reach areas.
 Locking for safe, space-saving transport.

Material:

Housing of glass-fibre reinforced polyamide.

Application:

Stripping of all commonly used flexible and solid conductors
 from 0.2 – 6.0 mm² (24 – 10 AWG).
 Wire cutter for cutting of copper and Al conductors to max. ø 2 mm.

Order No.	mm	in	Ø mm	AWG		£/pc.	NEW
36050 4	190	7½	0.2 – 6.0	24 – 10	110	1	24.47

NEW



Wiha DynamicJoint

- The world's best Wiha pliers
- Maximum cutting performance
- Long life – maximum cutting quality!
- Optimal cutting results even after 1,200 cuts!





Up to **40%**
less force required
for cutting



AC 1000V
IEC 60900:2004

9300-018 Electrician's toolbag, 6 pcs.

Design: High quality tools in a practical toolbag.
VDE tools with protective isolation 1000 VAC, GS-tested.
Individually tested for electrical safety according to IEC 60900:2004.
Bag format approx. 30 x 15 x 7 cm.

Contents: Insulated tools:

Professional electric diagonal cutter, 160 mm (series Z 12 0 06) –
with Wiha DynamicJoint

Wiha SoftFinish® electric screwdriver:

- Slotted screwdriver, 3.0x100 / 4.5x125 / 5.5x125 (series 320N)
- Phillips screwdriver, PH1x80 / PH2x100 (series 321N)

Order No.	Series		£/pc.	NEW
33969 2	9300-018	1	39.90	✓

Wiha screwdrivers

Optimum fitting for perfect work.



3021

SoftFinish® slotted screwdriver.

Round blade with lasered millimetre scale from 20 to 90 mm.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.

Wiha ChromTop® finish on tip for a perfect fit every time.

Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.

Standards: DIN 7437, DIN 5264, DIN ISO 2380.

Application: Especially for dry and general applications.

Extra: High-contrast millimetre scale permanently lasered on to the blade for depth, inner, outer and step measurements between 20 to 90 mm.

Order No.	①	↔	⊖	●	↔	↔	scale	mm	£/pc.	NEW
36085 6	4.0	100	0.8	4.0	211	30	20-90	10	4.11	✓
35397 1	5.5	125	1.0	5.5	236	30	30-110	10	6.30	



3111

SoftFinish® Phillips screwdriver.

Round blade with lasered millimetre scale from 20 to 70 mm.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.

Wiha ChromTop® finish on tip for a perfect fit every time.


Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.

Standards: DIN 7437, DIN 5264, DIN ISO 2380.

Application: Especially for dry and general applications.

Extra: High-contrast millimetre scale permanently lasered on to the blade for depth, inner, outer and step measurements between 20 to 70 mm.

Order No.	⊕	↔	●	↔	↔	scale	mm	£/pc.	NEW
36072 6	PH1	80	4.5	191	30	20-70	10	4.65	✓
35398 8	PH2	100	6.0	218	36	20-90	10	6.57	

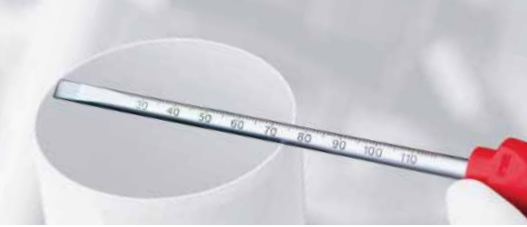

Wiha screwdriver with mm scale

- The screwdriver that can measure as well
- Millimetre scale deeply lasered into the blade can be easily read
- Precise measurements thanks to slotting of finger nail into scale
- For all depth, inner, outer and step measurements up to 110 mm
- Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection and output recognition



mm scale:

4.0 x 100:	20 – 90 mm
5.5 x 125:	30 – 110 mm



mm scale:

PH1 x 80:	20 – 70 mm
PH2 x 100:	20 – 90 mm



mm scale:

PZ1 x 80:	20 – 70 mm
PZ2 x 100:	20 – 90 mm



3131

SoftFinish® Pozidriv screwdriver.

Round blade with lasered millimetre scale from 20 to 70 mm.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.

Wiha ChromTop® finish on tip for a perfect fit every time.

Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.

Standards: DIN 7437, DIN 5264, DIN ISO 2380.


Application: Especially for dry and general applications.

Extra: High-contrast millimetre scale permanently lasered on to the blade for depth, inner, outer and step measurements between 20 to 70 mm.

Order No.						scale		£/pc.	NEW
36073 3	PZ1	80	4.5	191	30	20-70	10	5.51	✓
35399 5	PZ2	100	6.0	218	36	20-90	10	7.62	

Wiha SYSTEM 6

The compact allrounder.

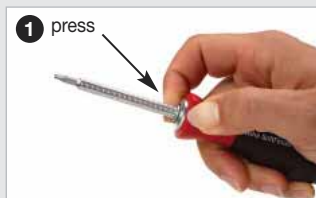


Press sleeve:
⇒ Blade locking is released



Press and hold down sleeve:
⇒ Set desired blade length



Release sleeve:
⇒ Blade is held securely

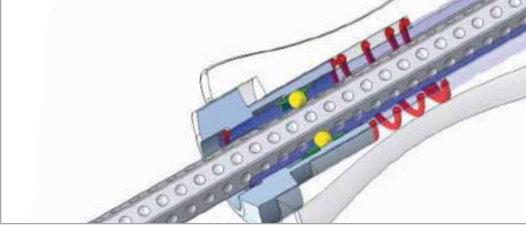

284 **SYSTEM 6 slotted reversible blade.**

Blade: High quality chrome-vanadium-molybdenum steel,
through hardened, chrome-plated.
Colour-coded Wiha ChromTop® tips.

Order No.	①	①	⊖	⊖	↔	⬡	⬢	£/pc.	NEW
27627 0	3.5	4.5	0.6	0.8	150	6.0	5	5.42	
00629 7	4.0	6.0	0.8	1.0	150	6.0	5	5.42	
00630 3	5.5	6.5	1.0	1.2	150	6.0	5	5.42	
36084 9	8.0	-	1.2	-	150	6.0	5	5.42	✓



284 **SYSTEM 6 SoftFinish®-telescopic handle.**

Ergonomic multi-component handle with roll-off protection.

Handle: With 6 mm hex retainer.
Enables adjustable blade lengths from 42 – 114 mm.
ClickStop ball clamp guarantees a secure hold and
rapid blade exchange.

Application: Versatile for general applications in the workshop and factory.

Order No.	⬢	↔	⬢	⬢	£/pc.
30372 3	6.0	115	36	5	11.53

Wiha L-keys


Perfect technic for professional work.



reddot design award
winner 2010



*Extremely agile:
the new ball end now enables
fastenings up to an angle of 30°.*



SW10



Wiha ErgoStar

- Innovative key extraction:
one turn and all L-keys are rapidly and
conveniently ready for removal
- Quick replacement of keys in the holder
thanks to solid stopping point
- Guaranteed firm fixing of keys over
the complete service life
- Up to 25% more corrosion resistance
thanks to high quality brilliant chroming
- Metric scale (SW 10) in range 20 – 150 mm





369 H9S Ball end hex L-key set in holder.

Brilliant chrome-plated, 9 pcs.

Blade: Chrome vanadium steel, through-hardened, brilliant chrome-plated.

Standards: Based on ISO 2936L.

Application: Especially for screws that are difficult to access.

Extra: Mechanical operation of the space-saving holder makes simplest removal of each individual L-key possible without movement of the others.

The ball end enables fastening and unfastening at an angle of up to 30°.

Metric scale permanently lasered on to the SW 10 key for depth, inner, outer and step measurements between 20 to 150 mm.

Only available as part of a set.

Order No.										NEW	
34753	6	369 H9S						5	28.22		✓
		369S	1.5	2	2.5	3	4				
			5	6	8	10					



SB 369 H9S Ball end hex L-key set in holder.

Brilliant chrome-plated, 9 pcs.

Blister packed.

Order No.										NEW	
34754	3	SB 369 H9S						5	28.65		✓
		369S	1.5	2	2.5	3	4				
			5	6	8	10					

Wiha L-keys

Perfect technic for professional work.



369 HVH1S


Display ball end hex L-key sets.

Brilliant chrome-plated, 9 pcs. Carton display with 5 pieces.

Order No.	Content			£/pc.
34764 2	5 x 369 H9S	1.5 - 10	1	143.23



Wall holder for practical storage of the Wiha ErgoStar: all keys always ready to hand. Available together with the Wiha ErgoStar in all display and blister pack versions.



369T S9

Ball end hex L-key set in ProStar.

Chrome-plated, 9 pcs., 95°.

Blade: Chrome-vanadium steel, through hardened, chrome-plated.

Standards: Based on ISO 2936L.

Application: Specially for hard-to-reach screws and confined spaces.

Extra: Space saving ProStar allows the easy removal of each key without moving any others. The ball end enables the user to work at angles up to 25°.

The shortened L-key arm enables fastening in hard-to-reach places.



Order No.			£/pc.	NEW
35480 0	369T S9	5	22.87	✓
	369	1.5 2 2.5 3 4 5 6 8 10		

SB 369T S9

Ball end hex L-key set in ProStar.

Chrome-plated, 9 pcs. Blister packed.

Order No.			£/pc.	NEW
35481 7	SB 369T S9	5	23.29	✓





359

Hex L-key with pivot.

Blade: Chrome-vanadium steel, through hardened, nickel-plated.

Standards: DIN 6911.

Application: Fits hex socket screws with low head and centre hole.

With key guidance according to DIN 6912.

Order No.	⊙				£/pc.
01255 7	3	64	23	10	1.11
01256 4	4	72	29	10	0.89
01257 1	5	83	33	10	0.94
01258 8	6	94	38	10	1.37
01259 5	8	105	44	10	1.82
01260 1	10	119	50	5	2.42
01261 8	12	134	57	5	3.71
01262 5	14	151	70	5	5.61
01263 2	17	173	80	5	9.21



359 T5

Hexagon L-key set with pin in a roll-up pouch.

Blade: Chrome-vanadium steel, through hardened, nickel-plated.

Standards: DIN 6911.

Application: Fits hex socket screws with low head and centre hole.

With key guidance according to DIN 6912.

Extra: Robust roll-up bag allows space-saving storage of tools.

Order No.								£/pc.	NEW
33391 1		359 T5					10	7.19	✓
⊙	359	3	4	5	6	8			

Wiha bits

Perfect technic for professional work.



7143 Universal holder, magnetic/ retaining ring, style E 6.3.

Sleeve: Stainless steel.

Suitable for: For bits according to DIN 3126, ISO 1173 style C 6.3.

Drive: DIN 3126, ISO 1173, style E 6.3.

Application: For applications where the bit must be held tight e.g. assembly lines.

Order No.					£/pc.
01913 6	1/4	1/4	72	10	7.92



7143 L Universal holder, magnetic/ retaining ring, style E 6.3.

Sleeve: Stainless steel.

Suitable for: For bits according to DIN 3126, ISO 1173 style C 6.3.

Drive: DIN 3126, ISO 1173, style E 6.3.

Application: For applications where the bit must be held tight e.g. assembly lines.

Extra: The alternative to long bits.

Order No.					£/pc.	NEW
36092 4	1/4	1/4	100	5	8.93	✓
34306 4	1/4	1/4	150	5	9.93	✓
36093 1	1/4	1/4	200	5	10.93	✓



7180-7 Quick release holder, magnetic, SDS-Plus®.

Suitable for: For bits according to DIN 3126, ISO 1173 style C 6.3.

Drive: SDS-Plus®.

Application: For SDS-Plus® chuck.

Extra: All hammer drills become powerful screwdrivers with this bit holder.

Order No.					£/pc.	NEW 2010
26255 6	1/4	SDS-Plus®	100	10	13.74	✓



7148CM CentroFix quick release holder, magnetic, style E 6.3.

- Sleeve:** Metal, coated.
- Suitable for:** For bits according to DIN 3126, ISO 1173 style C 6.3 and E 6.3.
- Drive:** DIN 3126, ISO 1173, style E 6.3.
- Application:** Whenever the bit needs a secure and zero-play hold.
Optimised for the use of drill bits.
- Extra:** Due to the special holding mechanism, this bit holder holds all types of bits with 1/4" hex drive.
The play between bit and holder is reduced to a minimum.
Real single-handed operation for fast bit exchange.

Order No.					£/pc.	NEW 2010
35386 5	1/4	1/4	60	10	17.55	✓



7948-928 XLSelector, Torsion, mixed, 13 pcs.

- Bits:** 50 mm ZOT Torsion bits.
- Holder:** CentroFix quick release holder, magnetic, style E 6.3.
- Application:** Especially suitable for fastenings in metal and hard materials – it can't get any more compact!
- Extra:** Soft zones for maximum working comfort.

Order No.	Series		£/pc.	Relaunch
33663 9	7948-928	5	52.86	✓
	7041 ZOT	1xPH1 1xPH2 1xPH3		
	7042 ZOT	1xPZ1 1xPZ2 1xPZ3		
	7045 Z	1xT10 1xT15 1xT20 1xT25 1xT30 1xT40		
	7148C	CentroFix quick release holder, style E 6.3		

Wiha pliers

Quality and ergonomics for professionals.



Z 21 0 02 Water pump pliers Industrial.

Standards: DIN ISO 8976.

Head shape: Narrow head, therefore also appropriate for work in small spaces.

Design: Precision adjustment joint, box type, providing optimum adaptation to object to be gripped.

Long durability achieved by additional inductive hardening of gripper jaws.

Material: Chrome vanadium tool steel, tempered.

Application: For gripping and holding pipes and angular profiles such as hex nuts in the installation area.

Order No.	mm	II	O	□	U	mm	£/pc.	NEW
36038 2	180	7	1	30	170	5	16.10	✓
32342 4	250	10	2	50	380	5	17.55	
36039 9	300	12	2 ½	63	640	5	24.10	✓



Z 22 0 02 Water pump pliers Industrial with push button adjustment.

Head shape: Extra narrow head, therefore also appropriate for work in difficult to access areas.

Design: Precision adjustment joint, box type, providing optimum adaptation to object to be gripped.

Rapid and simple push button setting and locking.

Long durability achieved by additional inductive hardening of gripper jaws.

Order No.	mm	II	O	□	U	mm	£/pc.	NEW
36040 5	180	7	1	30	175	5	20.83	✓
32352 3	250	10	2	50	400	5	22.28	
36041 2	300	12	2 ½	63	670	5	31.01	✓



Wiha Industrial

- **As hard as steel**
Pliers head drop forged from high quality steels
- **Ergonomic**
Extra wide handle backs, with soft and hard zones perfectly distributed across the handle
- **Robust and durable**
Cutting edges are individually tempered and additionally induction hardened
- **Attractive**
Award-winning design with high quality chrome-plated head



Z 17 0 02 Industrial end cutting nippers.

Standards: DIN ISO 5748.

Head shape: Classic style.

Design: Low wear lap joint, riveted and able to withstand high levels of load.
Striking high quality cutting edge with high cutting performance and low application of force due to highly precise processing.
Good durability due to additional induction hardening of cutting edges to approx. 62 HRC.

Material: High-quality tool steel, tempered.

Application: Power assisted, all round diagonal cutter for soft wires as well as demanding piano wires.
Also appropriate for binding (plaiting) and cutting wire netting in reinforced concrete structures.

Order No.							£/pc.	NEW
36035 1	160	6 ½	3.5	2.5	180	5	12.28	
36036 8	180	7	3.8	2.8	200	5	14.19	
36037 5	200	8	4.0	3.0	220	5	17.19	

Wiha pliers

Quality and ergonomics for professionals.



Up to **40%**
less force required
for cutting



9300-019 Mechanic's toolbag, 6 pcs.

Design: High quality tools in a practical toolbag.
Bag format approx. 30 x 15 x 7 cm.

Contents: **Professional combination pliers**, 180 mm (series Z 01 0 05) –
with Wiha DynamicJoint

Wiha SoftFinish® screwdrivers:

- Slotted screwdriver, 3.5x100 / 4.5x125 / 6.5x150 (series 302)
- Phillips screwdriver, PH1x80 / PH2x100 (series 311)

Order No.	Series		£/pc.	NEW
33970 8	9300-019	1	34.90	





Up to **40%**
less force required
for cutting



9300-020 Mechanic's toolbag, 6 pcs.

Design: High quality tools in a practical toolbag.
Bag format approx. 30 x 15 x 7 cm.

Contents: **Professional diagonal cutters**, 160 mm (series Z 12 0 05) –
with Wiha DynamicJoint
Wiha SoftFinish® screwdrivers:
– Slotted screwdriver, 3.5x100 / 4.5x125 / 6.5x150 (series 302)
– Phillips screwdriver, PH1x80 / PH2x100 (series 311)

Order No.	Series		£/pc.	NEW
33971 5	9300-020	1	34.90	✓

Wiha magazine bit holder

Everything in the palm of your hand.



reddot design award
best of the best 2008



product
design
award
gold
2010



Wiha magazine bit holder.

- Unique fold-out mechanism
- Eight screwdrivers in one – for timesaving, effective working
- Magnetic fixing function
- Ergonomic SoftFinish® zone
- Handy & compact




Wiha magazine bit holder Stubby.

- Gets everywhere
- Has six bits in the cap
- Fits perfectly in your hand
- Professional quality
Made in Germany
- Ideal for professional work in confined spaces



Wiha PocketStar

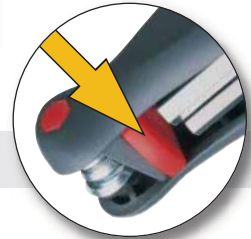

Wiha Mini PocketStar



The unique opening mechanism facilitates an easy selection of the desired key size.



Wiha world-wide

70 years

Innovation.

Quality.

Reliability.

wiha



Premium Tools

wiha 
Premium Tools

Wiha Tools Ltd.

Avon House
Buntsford Drive, Stoke Heath
Bromsgrove B60 4JE
Tel. +44 1527 57 57 58, 91 09 86
Fax +44 1527 88 81 20
info.uk@wiha.com
www.wiha.com