


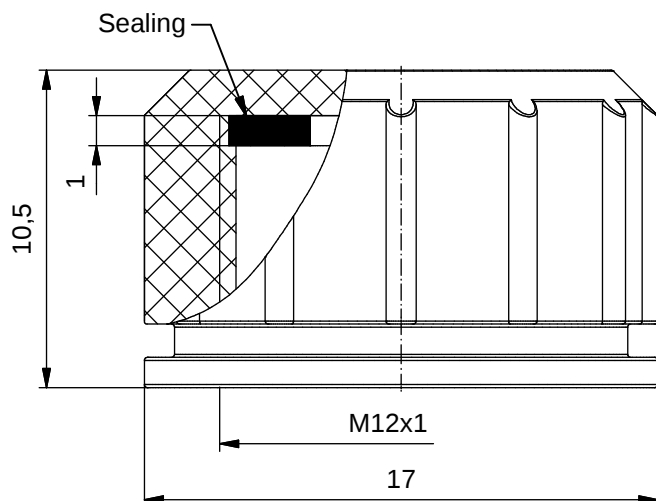

Technical specification:

Degree of protection: IP 67, in mated condition
IEC 60529

Temperature range: -30°C ... +120°C

Materials:


Protecting cap: PA GF

Sealing: FKM black


Loop: PP

Installation specification:

Recommended torque: 0,6 Nm

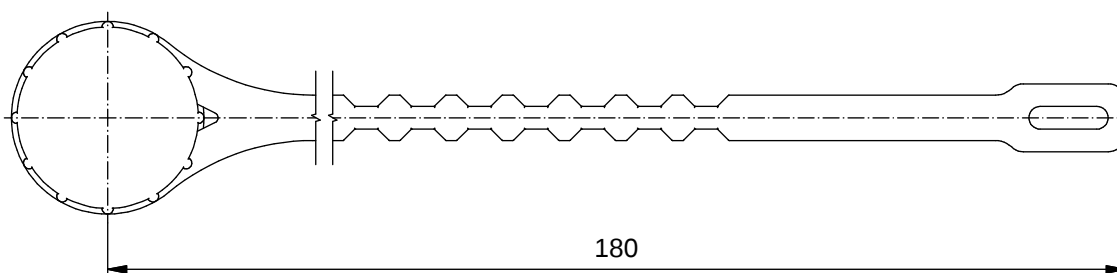

Part no:	Description:	Colour:
43-16214	Protecting cap M12x1 male socket with loop	black

DO NOT ALTER CAD DRAWING BY HAND Directive 2002/95/EC RoHS compliant					dim. in mm	title: Protecting cap M12x1 with loop, male socket
		date	name			
		drawn	18.01.13	Gitinow	dwg no:	
		appd.	21.01.13	Kniesburgers		
	general tolerance:				0 ± 0,50mm 0,0 ± 0,25mm 0,00 ± 0,10mm	43K1A1803
	THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH					
					part no:	see table

CONEC®