

TILTED DIAMOND+ support tube, black, L 400 mm



description

The holder tubes in various lengths and shapes, together with the mounting base, enable diverse mounting options for the TILTED DIAMOND+ variants. The mounting tubes are also used for the KIS.LIGHT and the TILTED DIAMOND+ IO-LINK. This allows the signal lights to be mounted easily and clearly even in remote or out-of-the-way locations.


The mounting tubes are connected to the mounting base by a threaded pin. The material is black coated steel. The holder tubes and the mounting base have environmental resistance, which is certified according to IEC 60068-2.

technical data

> general		direct links
Color	black	> RAFI eCatalog
Packaging unit	1 pcs.	
net weight	485.0 g	
Environment resistance	IEC 60068-2-27 IEC 60068-2-64	
MOQ order	1 pcs.	
RoHS compliant	Yes	
REACH compliant	Yes	
Component material	Metall	
> mounting diameters		
Outside dimension, length	400 mm	
Outside dimension, width	46 mm	
> mechanical data		
Fixing	Screw	

drawings

Dimensioned drawing

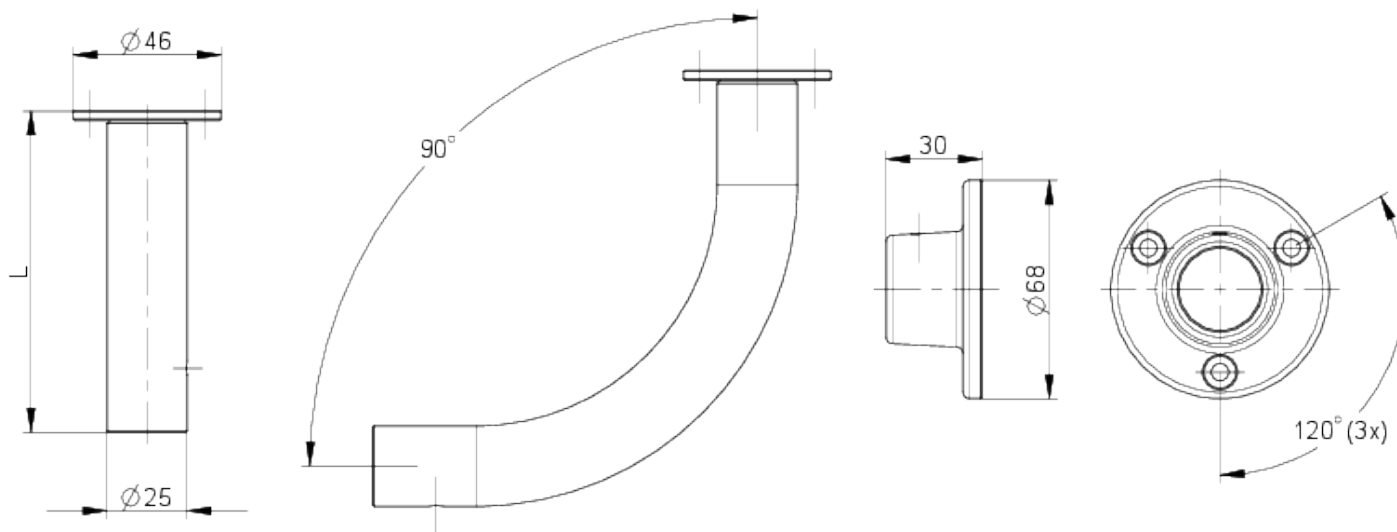

System drawing

