

MICON 5, round plunger 14.5 mm, GH 5.55 mm



fields of application

- > Measurement-control-regulation
- > Mechanical and system engineering
- > Automotive
- > Signalling systems
- > Vehicle construction
- > Handheld terminals

description

The wide selection of standard plungers in different shapes and colors guarantees a versatile range of applications for the MICON 5 tactile switch.

technical data

> general

Color	weiß
Collar shape	round
illuminated	No
Packaging unit	500 pcs.
net weight	0.3 g
MOQ order	500 pcs.
RoHS compliant	Yes
REACH compliant	Yes
Component material	Kunststoff

direct links


- > [RAFI eCatalog](#)

> mounting diameters


Outside dimension, length	3 mm
Outside dimension, width	14.5 mm
Outside dimension, height	14.5 mm
Plunger length L	3 mm
Support height A	2.55 (SMT) / 2.5 (THT) mm
Total height GH	5.55 mm

drawings

Dimensioned drawing

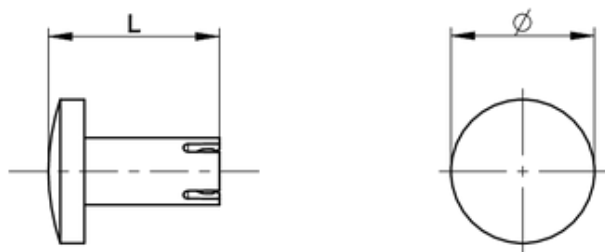

System drawing

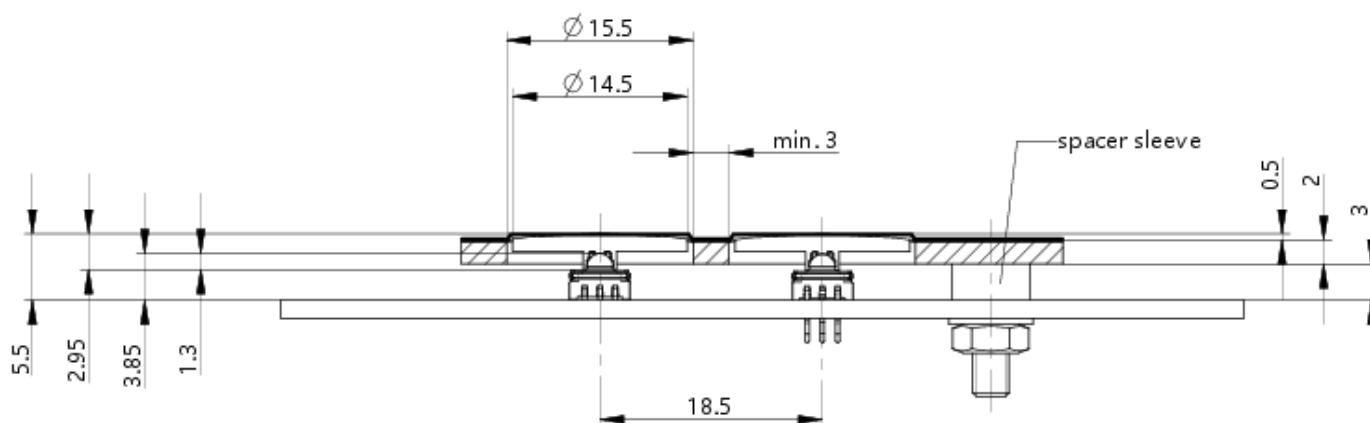

Technical drawing showing a cross-section of a cable assembly. The drawing includes the following dimensions and labels:

- Recommendation High embossing: 0.35 mm
- Adhesive thickness: 0.15 mm
- Outer diameter of the cable: $\varnothing 15.5$
- Inner diameter of the cable: $\varnothing 14.5$
- Minimum gap: min. 3
- Spacer sleeve
- Dimensions: 9.7, 9.2, 3.8, 1.3, 18.5, 7.2, 2

[illegible]