


## SKINTOP® MS

SKINTOP® MS, brass cable gland with maximum reliability, in areas where mechanical and chemical stability are critical



Good chemical resistance

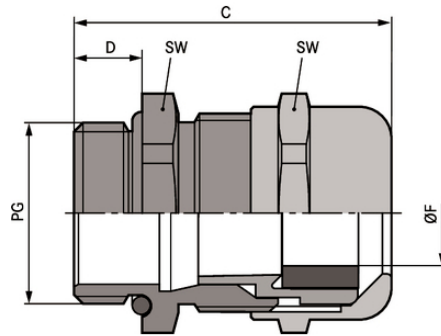

Corrosion-resistant



Optimum strain relief



Robust



Temperature-resistant



Variety of approval certifications

### Benefits

Maximum reliability

Optimum strain relief

Wide, variable clamping ranges

### Application range

In areas where mechanical and chemical stability are critical

Chemical industry

Measurement and control technology

Machine and equipment manufacturing

Plant engineering

### Product Make-up

PG connection thread acc. to DIN 40430

Last Update (11.12.2022)

©2022 Lapp Group - Technical changes reserved

Product Management [www.lappkabel.de](http://www.lappkabel.de)

You can find the current technical data in the corresponding data sheet.

PN 0456 / 02\_03.16

## SKINTOP® MS

### Technical Data

|                        |                                                                              |
|------------------------|------------------------------------------------------------------------------|
| Classification ETIM 5: | ETIM 5.0 Class-ID: EC000441<br>ETIM 5.0 Class-Description: Cable screw gland |
| Classification ETIM 6: | ETIM 6.0 Class-ID: EC000441<br>ETIM 6.0 Class-Description: Cable screw gland |
| Caution:               | Refer to Appendix T21 for the installation dimensions and torques            |
| Material:              | Body: nickel-plated brass<br>Insert: polyamide<br>Sealing: CR<br>O-ring: NBR |
| Protection rating:     | IP 68 - 5 bar                                                                |
| Temperature range:     | Dynamic: -25°C up to +100°C<br>Fixed: -40°C up to +100°C                     |

### Note

Photographs and graphics are not to scale and do not represent detailed images of the respective products.  
Prices are net prices without VAT and surcharges. Sale to business customers only.

**SKINTOP® MS**

| Article number | Article designation / size | Ø F mm      | SW wrench size mm | Overall length C mm | Thread length D mm | Pieces / PU |
|----------------|----------------------------|-------------|-------------------|---------------------|--------------------|-------------|
| SKINTOP® MS    |                            |             |                   |                     |                    |             |
| 52015700       | PG 7                       | 2.0 - 6.5   | 14                | 25.0                | 5                  | 100         |
| 52015710       | PG 9                       | 4.0 - 8.0   | 17                | 29.0                | 6                  | 100         |
| 52015720       | PG 11                      | 4.0 - 10.0  | 20                | 32.0                | 6                  | 50          |
| 52015730       | PG 13,5                    | 5.0 - 12.0  | 22                | 34.0                | 6.5                | 50          |
| 52015740       | PG 16                      | 8.0 - 14.0  | 24                | 35.0                | 6.5                | 50          |
| 52015750       | PG 21                      | 11.0 - 18.0 | 30                | 40.0                | 7                  | 25          |
| 52015760       | PG 29                      | 16.0 - 25.0 | 40                | 48.0                | 8                  | 25          |
| 52015765       | PG 36                      | 19.0 - 32.0 | 50                | 62.0                | 15                 | 10          |
| 52015766       | PG 42                      | 28.0 - 38.0 | 57                | 62.0                | 15                 | 5           |
| 52015767       | PG 48                      | 34.0 - 44.0 | 64                | 62.0                | 15                 | 5           |

Last Update (11.12.2022)

©2022 Lapp Group - Technical changes reserved

Product Management [www.lappkabel.de](http://www.lappkabel.de)

You can find the current technical data in the corresponding data sheet.

PN 0456 / 02\_03.16