


Fixing ties with screw mount head anchoring allow to fix bundles and cabling with screw mount head for fastening bundles or cable to any surface

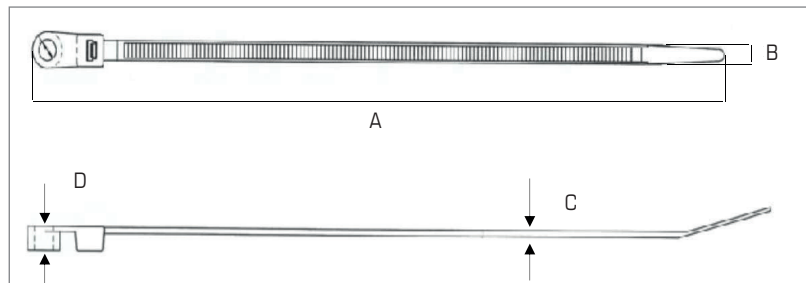

## COLORS

● Natural

## MATERIALS

**Material:** polyamide 6.6

**Halogen free**

**Material flammability rating:**

UL 94-V2

**Excellent resistance to:** aromatic solvents, oils, greases and derivatives

**Good resistance to:** bases

**Limited resistance to:** acids

**Not resistant to:** phenols and to chlorinated solvents

## APPLICATION

**Installation temperature:**

-10°C ÷ 60°C

**Working temperature:**

-40°C ÷ 85°C

## Technical Data

| CODE           | NOMINAL DIMENSIONS |          |          |          | Ø HOLE | BUNDLE DIAMETER |       |
|----------------|--------------------|----------|----------|----------|--------|-----------------|-------|
|                | (mm)               | (mm)     | (mm)     | (mm)     | (mm)   | (mm)            | (mm)  |
| <b>Natural</b> | <b>A</b>           | <b>B</b> | <b>C</b> | <b>D</b> |        | ø min           | ø max |
| 52150-I        | 150                | 3,5      | 1,1      | 4,0      | 4,4    | 2,0             | 32,0  |
| 52200-S        | 200                | 4,5      | 1,3      | 5,4      | 5,4    | 3,5             | 47,0  |
| 52200-H        | 200                | 7,5      | 1,9      | 6,5      | 6,0    | 4,0             | 44,0  |
| 52300-H        | 300                | 7,5      | 1,9      | 6,5      | 6,0    | 4,0             | 75,0  |
| 52380-H        | 380                | 7,5      | 1,9      | 6,5      | 6,0    | 4,0             | 101,0 |

## Mechanical features and packaging

| CODE           | MECHANICAL FEATURES | PACKAGING |        |
|----------------|---------------------|-----------|--------|
|                | Newton (N)          | (pcs)     | (pcs)  |
| <b>Natural</b> | Tensile strength    | Bag       | Box    |
| 52150-I        | 130                 | 100       | 10.000 |
| 52200-S        | 220                 | 100       | 5.000  |
| 52200-H        | 540                 | 100       | 3.000  |
| 52300-H        | 540                 | 100       | 2.000  |
| 52380-H        | 540                 | 100       | 2.000  |

## PRODUCTS CONFORMITY:

**CE marking:** our products comply with the Low Voltage Directive 2014/35/EU and the cable ties are tested in accordance with CEI EN IEC 62275 "Cable management system – Cable ties for electrical installations".

**Type 1**

**REACH:** the materials used to produce the cable ties comply with 1907/2006/CE (REACH)