




Releasable and reusable cable ties, suitable for temporary bundling and when open/close function is necessary in different industrial and commercial applications

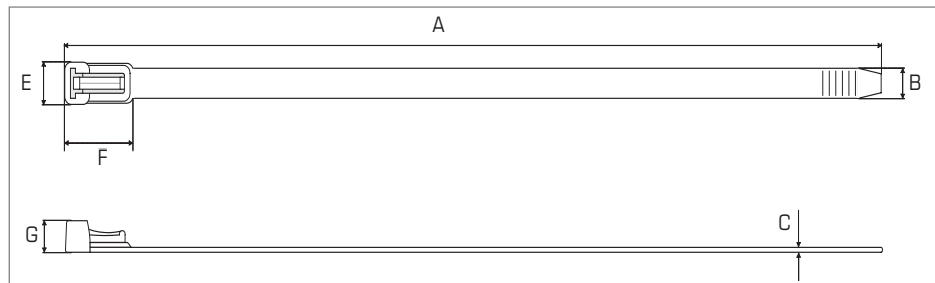

COLORS

- Natural
- Black

MATERIALS

Material: polyamide 6.6 + ~ 1% carbon black for the black version

Halogen free

Material flammability rating:

UL 94-V2

Excellent resistance to: aromatic solvents, oils, greases and derivatives

Good resistance to: bases

Limited resistance to: acids

Not resistant to: phenols and to chlorinated solvents

APPLICATION

Installation temperature:

-10°C ÷ 60°C

Working temperature:

-40°C ÷ 85°C

PRODUCTS CONFORMITY:

CE marking: our products comply with the Low Voltage Directive 2014/35/EU and the cable ties are tested in accordance with CEI EN IEC 62275 "Cable management system – Cable ties for electrical installations".

Type 1

REACH: the materials used to produce the cable ties comply with 1907/2006/CE (REACH)

Technical Data

CODE		NOMINAL DIMENSIONS						BUNDLE DIAMETER	
Natural	Black	(mm) A	(mm) B	(mm) C	(mm) E	(mm) F	(mm) G	(mm) ø min	(mm) ø max
5250	5350	200	7,5	1,25	10,6	21	7,9	6	50
5252	5352	250	7,5	1,25	10,6	21	7,9	6	65
5254	5354	350	7,5	1,25	10,6	21	7,9	6	100

Mechanical features and packaging

CODE		MECHANICAL FEATURES	PACKAGING	
Natural	Black	Newton (N) Tensile strength	(pcs) Bag	(pcs) Box
5250	5350	220	100	6.000
5252	5352	220	100	4.000
5254	5354	220	100	3.500