

TECHNICAL SPECIFICATIONS


Sub-D Hood:

Housing material:	Polyamid, UL-recognised
Operating Temperature:	-55°C to +105°C
Cable Entry:	Top
Thumbscrews:	UNC 4-40 (Standard) M2,5 or M3 on request
Cable O.D:	Up to 11,5mm
Accessories:	62-66



Female Sub-D Connector:

Insulator:	Glass filled TP, UL94 V-0
Shell:	Steel, Tin over Nickel plating
Contact pins:	Phosphor bronze
Contact Plating:	Selective Gold
Operating Temperature:	-55°C to +125°C
Current rating:	5A
Withstanding voltage:	1000V for 1 minute
Insulator resistance:	1000MΩ at 500VDC
Contact resistance:	20mΩ max.

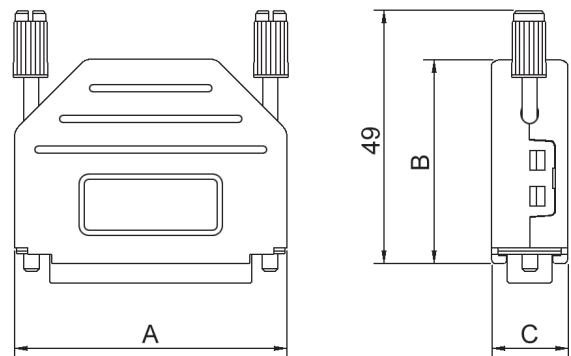

Features:

- Available in sizes 9-15-25-37-50
- Supplied with standard solder cup Sub-D connector
- Logotype, other colour or configuration - please contact us for further discussions

Size	Dim A	Dim B	Dim C
9-way	31,5	34,0	15,0
15-way	40,0	34,0	15,0
25-way	53,5	34,0	15,0
37-way	70,0	40,0	15,0
50-way	67,5	40,0	15,0

Ordering information:

Class 3 Sub-D Connector Kits (100 inserts min.)

Size:	P/N - Kitted:	Product Code - FEMALE Conn. Kit
9-way	6355-0001-11	DPPK09-BK-DBS-K
15-way	6355-0001-12	DPPK15-BK-DBS-K
25-way	6355-0001-13	DPPK25-BK-DBS-K
37-way	6355-0001-14	DPPK37-BK-DBS-K
50-way	6355-0001-15	DPPK50-BK-DBS-K