




Terminals & Splices > Quick Disconnects

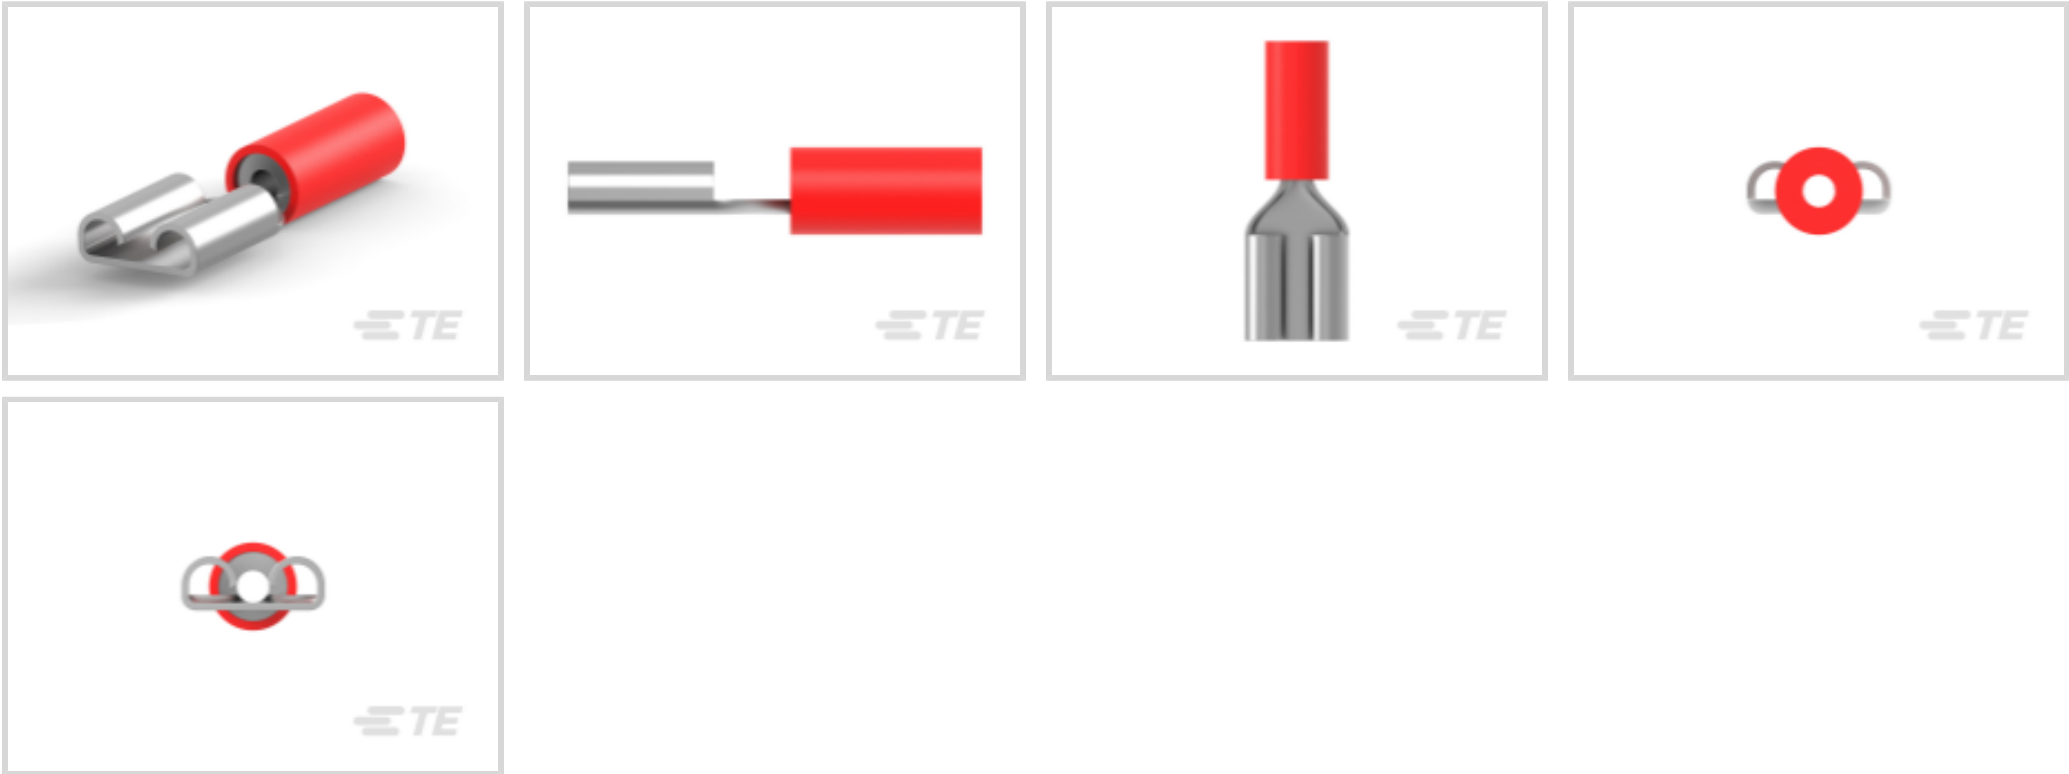

Quick Disconnect Terminal Type: **Receptacle**

Wire Size: **592 - 3260 CMA**

Mating Tab Width: **6.35 mm [.25 in]**

Features

Product Type Features

Insertion Force	Normal
-----------------	--------

Configuration Features

Connection Capacity	Single
---------------------	--------

Body Features

Insulation Material	Nylon
---------------------	-------

Contact Features

Quick Disconnect Terminal Type	Receptacle
Mating Tab Width	6.35 mm[.25 in]
Mating Tab Thickness	.81 mm[.032 in]
Terminal Orientation	Straight
Contact Base Material	Phosphor Bronze
Terminal Plating Material	Tin
Crimp Type	Compression
Barrel Type	Closed

Termination Features



Product Terminates To	Wire & Cable
-----------------------	--------------

Mechanical Attachment

Wire Insulation Support	With
Mating Retention Type	Dimple

Dimensions

Product Length	22.2 mm[.874 in]
Compatible Insulation Diameter Range	3.5 mm[.14 in]
Wire Size	592 - 3260 CMA

Usage Conditions

Insulation Option	Partially Insulated
Operating Temperature Range	105 °C[221 °F]

Packaging Features

Packaging Quantity	1000
Packaging Method	Loose Piece

Other

Barrel Color	Red
--------------	-----

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability



Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these






limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

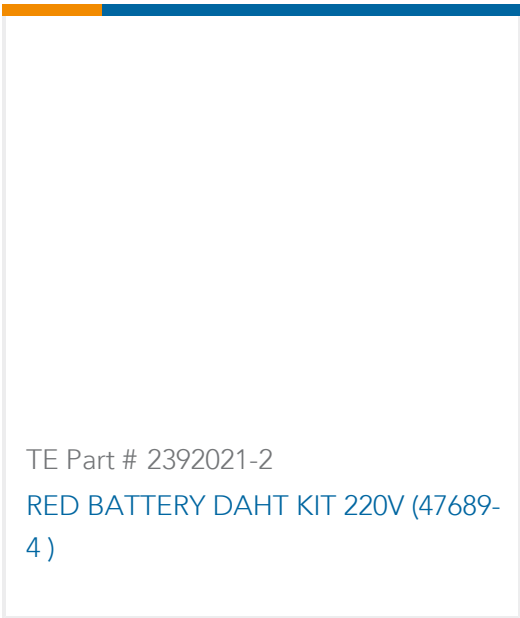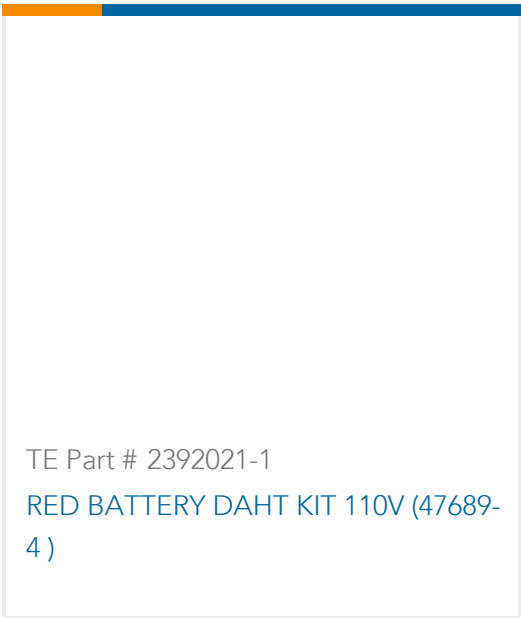 TE Part # 47386-4 DAHT PG PIDG 26-16 ASSY	 TE Part # 58433-3 PRO CR ASSY, RBY IS9252	 TE Part # 58423-1 DIE, RBY IS9252	 TE Part # 9-1377174-2 SMP 9-0160583-5
 TE Part # 525690 DAHT PG PIDG 20-18 ASSY	 TE Part # 90035-3 DAHT PIDG FASTON 22-18 ASSY	 TE Part # 2063030-1 SDE DIESET, RBY, UL	 TE Part # 169400 CERTI-LOK FRAME W/O DIES
 TE Part # 2392021-2 RED BATTERY DAHT KIT 220V (47689-4)	 TE Part # 2392021-1 RED BATTERY DAHT KIT 110V (47689-4)	 TE Part # 169404 CERTI-LOK DIE	 TE Part # 1SET191001R0000 CRIMP-HT

Also in the Series | FASTON 250

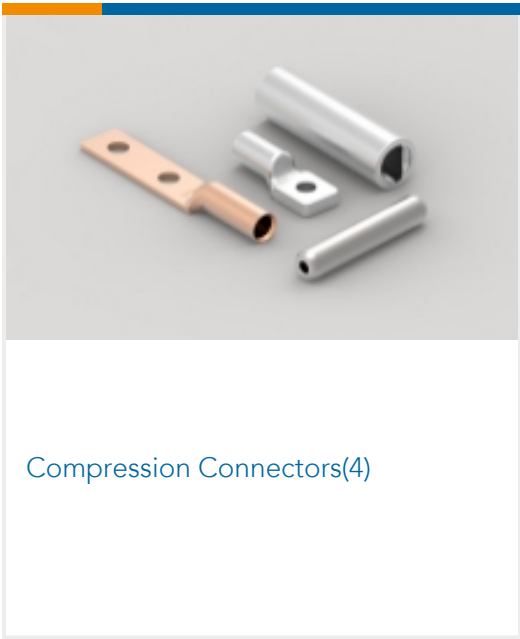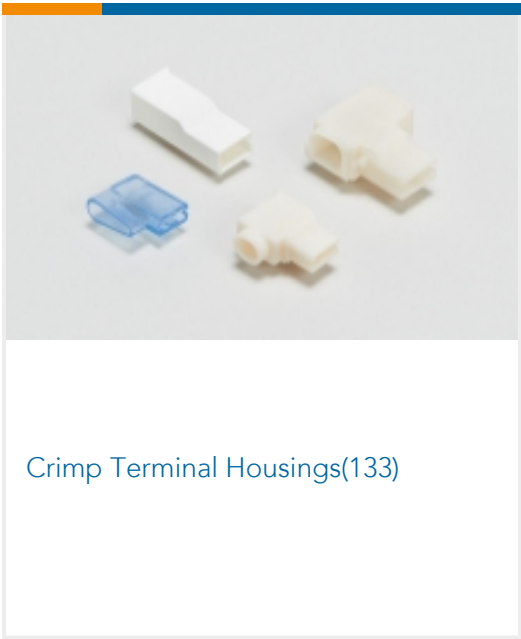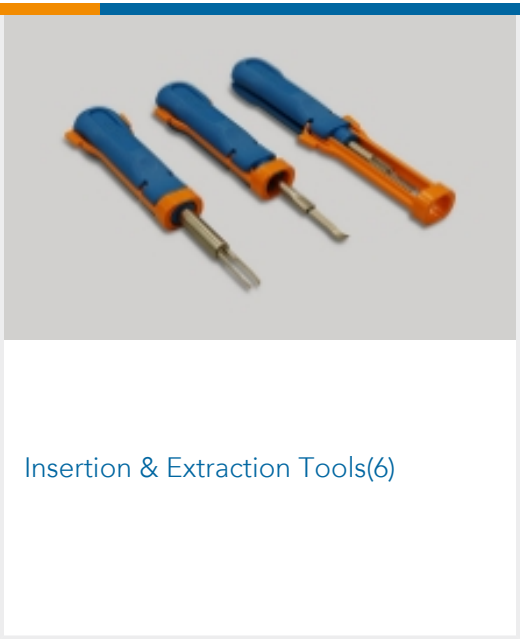 Compression Connectors(4)	 Crimp Terminal Housings(133)	 Insertion & Extraction Tools(6)	 Magnet Wire Terminals(1)
--	--	--	---



PCB Terminals(134)



Quick Disconnects(441)



Splices(4)


Customers Also Bought




TE Part # E72748-000
HX-SCE-1K-4.8-50-S1-4




TE Part # 709819-3
XCT 95-10

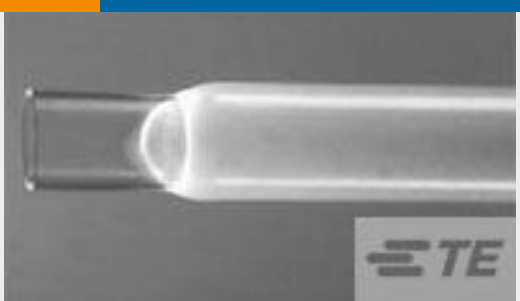


TE Part # 5950052002
TFE-22-X-STK




TE Part # 862256-1
POTTING SHELL




TE Part # 2074224-2
C/A, .8MM CHAMP, 50 POS, 2 METER



TE Part # 3742612236
Speed sen DSD 1616.73 QHW-F267S



TE Part # 374Z-05314
Speed sen DSD 1805.17 S4HR (3m)
Dynam.



TE Part # ZPF000000000015827
DTB 26 B 19-35 BN



TE Part # 2-1105151-1
HSS-C-Bu.Ag.4,0 qmm

Documents

Product Drawings

250 PIDG FASTON REC

English

CAD Files

3D PDF

English

Customer View Model

ENG_CVM_9-160583-5_L3.2d_dxf.zip



English

Customer View Model

[ENG_CVM_9-160583-5_L3.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_9-160583-5_L3.3d_stp.zip](#)

English

[3D PDF](#)

3D

Customer View Model

[ENG_CVM_CVM_9-160583-5_S.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_9-160583-5_S.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_9-160583-5_S.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[PIDG Terminals and Splices Quick Reference Guide](#)

English