


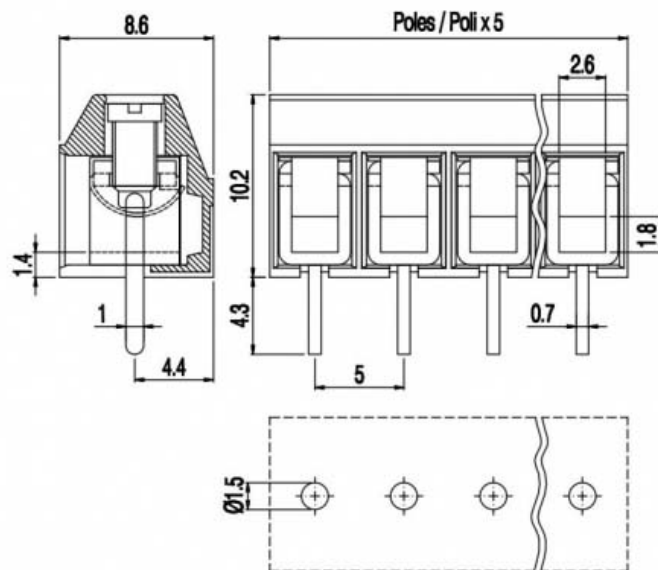

Version with antirotation pegs is available on 2 poles connections.
Disponibile per connessioni a 2 poli versioni con perni antitorzione.

Morsettiera Monopiano - Versione Liscia - Passo 5mm - 2÷12 poli

GENERAL INFORMATION

pitch:	5 mm
housing height:	10,20 mm
housing depth:	8.6 mm
dimensional class:	slow
wire section:	2.5 mm ² / 14 AWG
clamp opening size:	2.6 × 2 mm
wire stripping:	max 8 mm
operating temperature:	-40°C ÷ +130°C

ELECTRICAL CHARACTERISTICS

current:	24A
voltage:	450V
test voltage:	2.5 kVrms/60s

MECHANICAL CHARACTERISTICS

screw:	M2.5
recommended torque:	0.4÷0.44 Nm / 3.6÷4 in.lbs

APPROVALS DATA



EN 60998-1

current:	17.5A
voltage:	450V
wire section:	1.5mm ²
torque:	0.4Nm
FILE:	EP151



EN 60998-1

current:	24A
voltage:	450V
wire section:	2.5mm ²
torque:	0.4Nm
FILE:	40019705



UL 1059

current:	20A factory / 15A field
voltage:	300V
wire section:	14÷30AWG
torque:	3.6Lb-in
FILE:	E178356

ADDITIONAL INFORMATIONS

SCIP NUMBER:	f96aa5fb-ce76-4818-a732-b41ce6983956
--------------	--------------------------------------

MATERIALS

housing: PA - UL 94 V0
screw: Galvanized steel
clamp/spring: Tin-plated copper alloy
terminal: Tin-plated copper alloy

AVAILABLE COLOURS



other colours:

upon request

poles	P/N	pcs/pack	W [Kg]*	W [Kg]*
2	MBE152-5-V-L	N/A	N/A	N/A
3	MBE153-5-V-L	N/A	N/A	N/A
4	MBE154-5-V-L	N/A	N/A	N/A
5	MBE155-5-V-L	N/A	N/A	N/A
6	MBE156-5-V-L	N/A	N/A	N/A
7	MBE157-5-V-L	N/A	N/A	N/A
8	MBE158-5-V-L	N/A	N/A	N/A
9	MBE159-5-V-L	N/A	N/A	N/A
10	MBE1510-5-V-L	N/A	N/A	N/A
11	MBE1511-5-V-L	N/A	N/A	N/A
12	MBE1512-5-V-L	N/A	N/A	N/A