


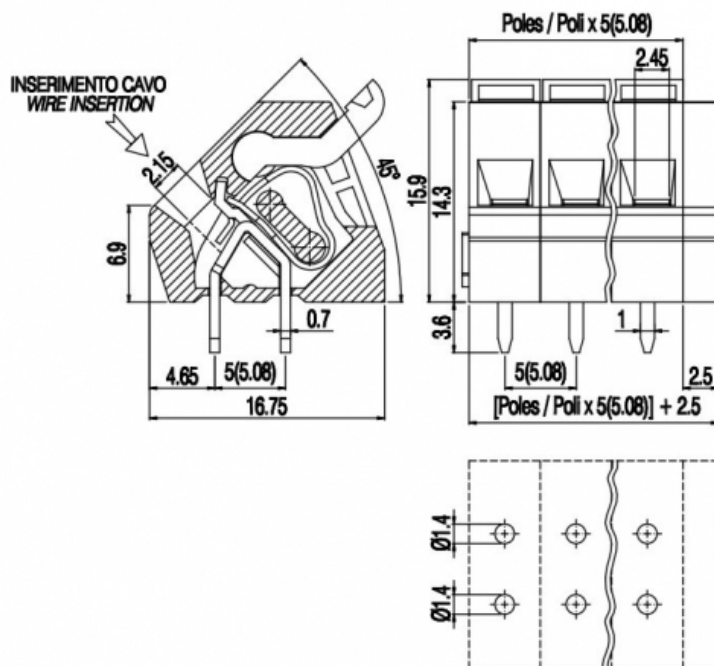

Screwless terminal block - 45° angled - with button - Modular version - Pitch 5,08mm

GENERAL INFORMATION

pitch:	5,08 mm
housing height:	14,30 mm
housing depth:	16.75 mm
dimensional class:	slow
wire section:	2.5 mm ² / 14 AWG
clamp opening size:	2.45 × 2.45 mm
wire stripping:	max 9 mm
operating temperature:	-40°C ÷ +130°C

ELECTRICAL CHARACTERISTICS

current:	24A
voltage:	250V
test voltage:	2 kVrms/60s

MECHANICAL CHARACTERISTICS

spring releasing:	0.6 x 3.5mm
-	-

APPROVALS DATA



current:	-	-	UL 1059
voltage:	-	-	17A factory / 17A field
wire section:	-	-	300V
torque:	-	-	12÷30AWG
FILE:	-	-	-
			E178356

MATERIALS

housing: PA - UL 94 V0
 screw: n/a
 clamp/spring:
 terminal: Tin-plated copper alloy

AVAILABLE COLOURS

other colours:

upon request

poles	P/N	pcs/pack	W [Kg]*	W [Kg]*
01	MG101-5,08-P	N/A	N/A	N/A
02	MG102-5,08-P	N/A	N/A	N/A
03	MG103-5,08-P	N/A	N/A	N/A
04	MG104-5,08-P	N/A	N/A	N/A
05	MG105-5,08-P	N/A	N/A	N/A
06	MG106-5,08-P	N/A	N/A	N/A
07	MG107-5,08-P	N/A	N/A	N/A
08	MG108-5,08-P	N/A	N/A	N/A
09	MG109-5,08-P	N/A	N/A	N/A
10	MG110-5,08-P	N/A	N/A	N/A
11	MG111-5,08-P	N/A	N/A	N/A
12	MG112-5,08-P	N/A	N/A	N/A
13	MG113-5,08-P	N/A	N/A	N/A
14	MG114-5,08-P	N/A	N/A	N/A
15	MG115-5,08-P	N/A	N/A	N/A
16	MG116-5,08-P	N/A	N/A	N/A
17	MG117-5,08-P	N/A	N/A	N/A
18	MG118-5,08-P	N/A	N/A	N/A
19	MG119-5,08-P	N/A	N/A	N/A
20	MG120-5,08-P	N/A	N/A	N/A
21	MG121-5,08-P	N/A	N/A	N/A
22	MG122-5,08-P	N/A	N/A	N/A
23	MG123-5,08-P	N/A	N/A	N/A