
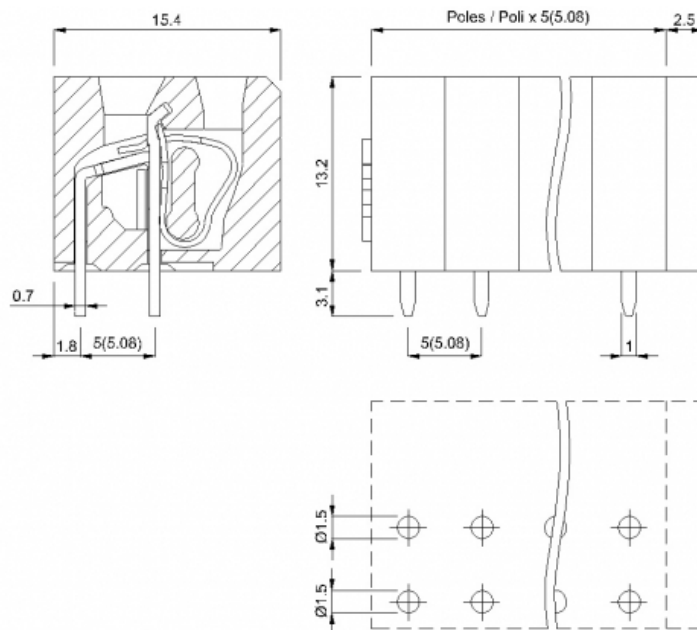


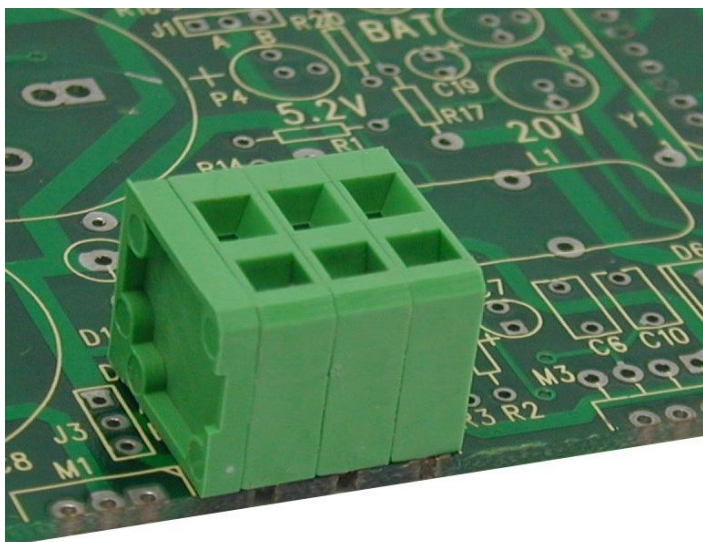

Screwless terminal block - Vertical - Modular version - Pitch 5,08mm

GENERAL INFORMATION

pitch:	5,08 mm
housing height:	13,20 mm
housing depth:	15.4 mm
dimensional class:	slow
wire section:	2.5 mm ² / 14 AWG
clamp opening size:	2.45 × 2.45 mm
wire stripping:	max 9 mm
operating temperature:	-40°C ÷ +130°C

ELECTRICAL CHARACTERISTICS

current:	24A
voltage:	450V
test voltage:	2 kVrms/60s

MECHANICAL CHARACTERISTICS

spring releasing:	0.6 x 3.5mm
-	-

APPROVALS DATA



	-	-	UL 1059
current:	-	-	17A factory / 17A field
voltage:	-	-	300V
wire section:	-	-	12÷30AWG
torque:	-	-	-
FILE:	-	-	E178356

MATERIALS

housing:	PA - UL 94 V0
screw:	Galvanized steel
clamp/spring:	Nickeled copper alloy

AVAILABLE COLOURS

GN (STD)	GY	BK	BL	RD	YL	OG	YG
other colours:	upon request						

terminal:

Tin-plated copper alloy

poles	P/N	pcs/pack	W [Kg]*	W [Kg]*
01	MG101-5,08-V	N/A	N/A	N/A
02	MG102-5,08-V	N/A	N/A	N/A
03	MG103-5,08-V	N/A	N/A	N/A
04	MG104-5,08-V	N/A	N/A	N/A
05	MG105-5,08-V	N/A	N/A	N/A
06	MG106-5,08-V	N/A	N/A	N/A
07	MG107-5,08-V	N/A	N/A	N/A
08	MG108-5,08-V	N/A	N/A	N/A
09	MG109-5,08-V	N/A	N/A	N/A
10	MG110-5,08-V	N/A	N/A	N/A
11	MG111-5,08-V	N/A	N/A	N/A
12	MG112-5,08-V	N/A	N/A	N/A
13	MG113-5,08-V	N/A	N/A	N/A
14	MG114-5,08-V	N/A	N/A	N/A
15	MG115-5,08-V	N/A	N/A	N/A
16	MG116-5,08-V	N/A	N/A	N/A
17	MG117-5,08-V	N/A	N/A	N/A
18	MG118-5,08-V	N/A	N/A	N/A
19	MG119-5,08-V	N/A	N/A	N/A
20	MG120-5,08-V	N/A	N/A	N/A
21	MG121-5,08-V	N/A	N/A	N/A
22	MG122-5,08-V	N/A	N/A	N/A
23	MG123-5,08-V	N/A	N/A	N/A