
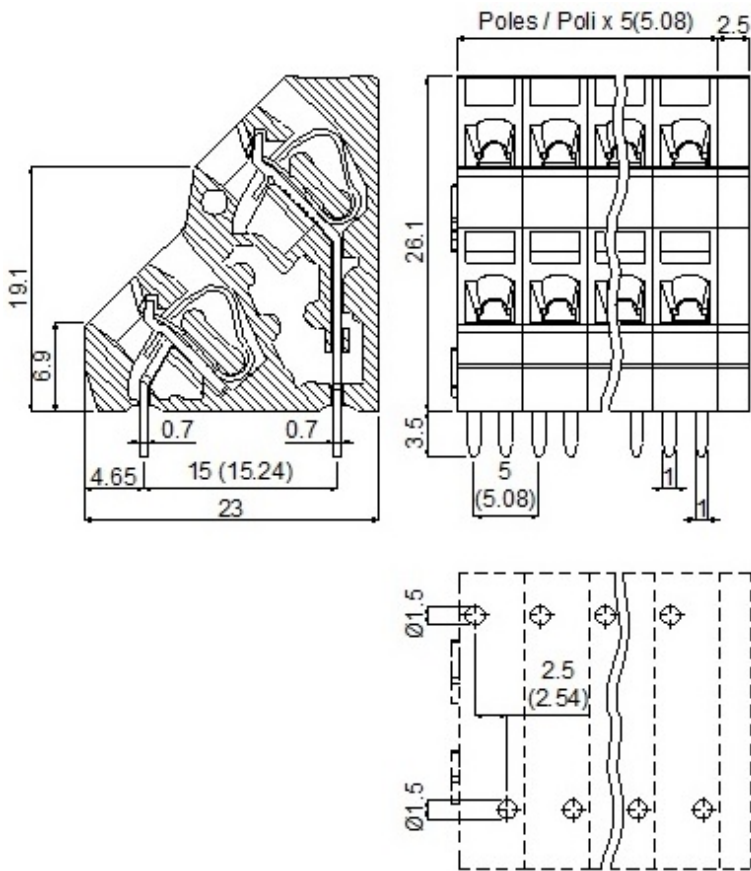


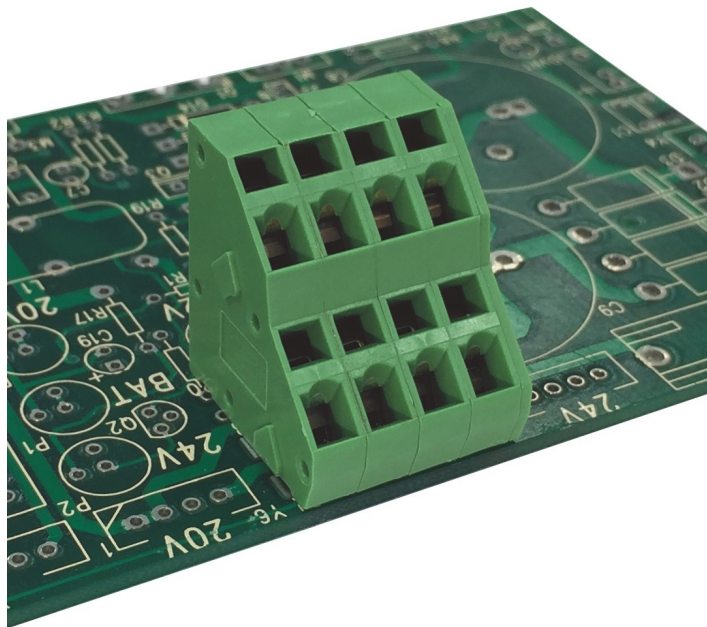

Screwless terminal block - 45° angled - 2 levels - Modular version - Pitch 5,08mm

GENERAL INFORMATION

pitch:	5,08 mm
housing height:	26,70 mm
housing depth:	21 mm
dimensional class:	slow
wire section:	2.5 mm ² / 14 AWG
clamp opening size:	
wire stripping:	max 9 mm
operating temperature:	-40°C ÷ +130°C

ELECTRICAL CHARACTERISTICS

current:	24A
voltage:	250V
test voltage:	2 kVrms/60s

MECHANICAL CHARACTERISTICS

spring releasing:	0.5 x 3.0mm
-	-

APPROVALS DATA



current:	-	-	UL 1059
voltage:	-	-	17A factory / 17A field
wire section:	-	-	300V
torque:	-	-	12÷30AWG
			-

MATERIALS

housing: PA - UL 94 V0
 screw: n/a
 clamp/spring:
 terminal: Tin-plated copper alloy

AVAILABLE COLOURS

(STD)

other colours:

upon request

poles	P/N	pcs/pack	W [Kg]*	W [Kg]*
01	MG1D01-5,08	N/A	N/A	N/A
02	MG1D02-5,08	N/A	N/A	N/A
03	MG1D03-5,08	N/A	N/A	N/A
04	MG1D04-5,08	N/A	N/A	N/A
05	MG1D05-5,08	N/A	N/A	N/A
06	MG1D06-5,08	N/A	N/A	N/A
07	MG1D07-5,08	N/A	N/A	N/A
08	MG1D08-5,08	N/A	N/A	N/A
09	MG1D09-5,08	N/A	N/A	N/A
10	MG1D10-5,08	N/A	N/A	N/A
11	MG1D11-5,08	N/A	N/A	N/A
12	MG1D12-5,08	N/A	N/A	N/A
13	MG1D13-5,08	N/A	N/A	N/A
14	MG1D14-5,08	N/A	N/A	N/A
15	MG1D15-5,08	N/A	N/A	N/A
16	MG1D16-5,08	N/A	N/A	N/A
17	MG1D17-5,08	N/A	N/A	N/A
18	MG1D18-5,08	N/A	N/A	N/A
19	MG1D19-5,08	N/A	N/A	N/A
20	MG1D20-5,08	N/A	N/A	N/A
21	MG1D21-5,08	N/A	N/A	N/A
22	MG1D22-5,08	N/A	N/A	N/A
23	MG1D23-5,08	N/A	N/A	N/A