
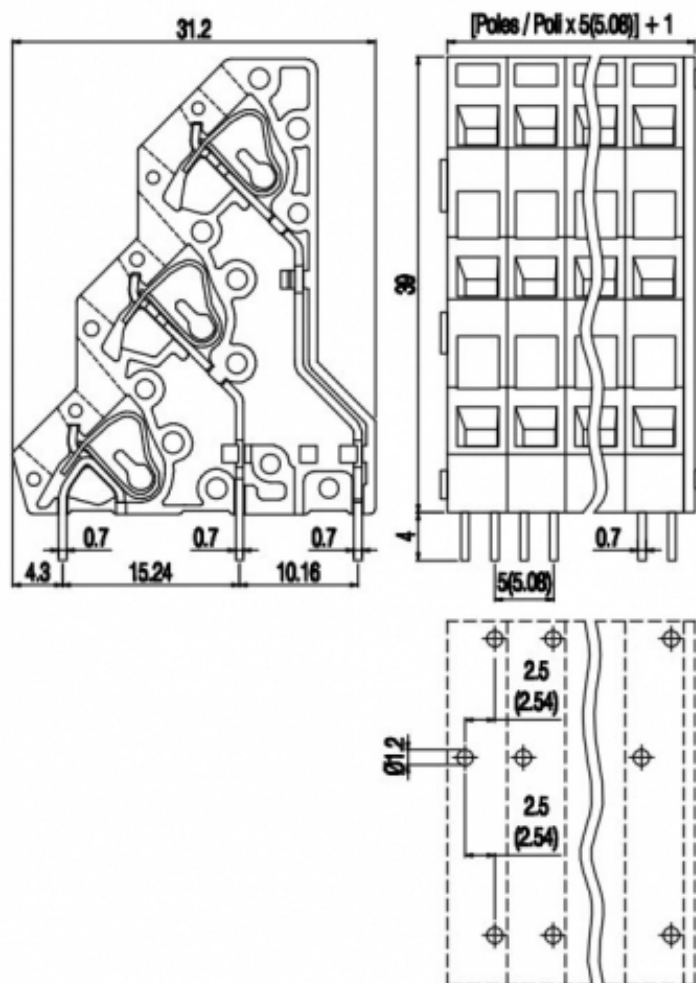


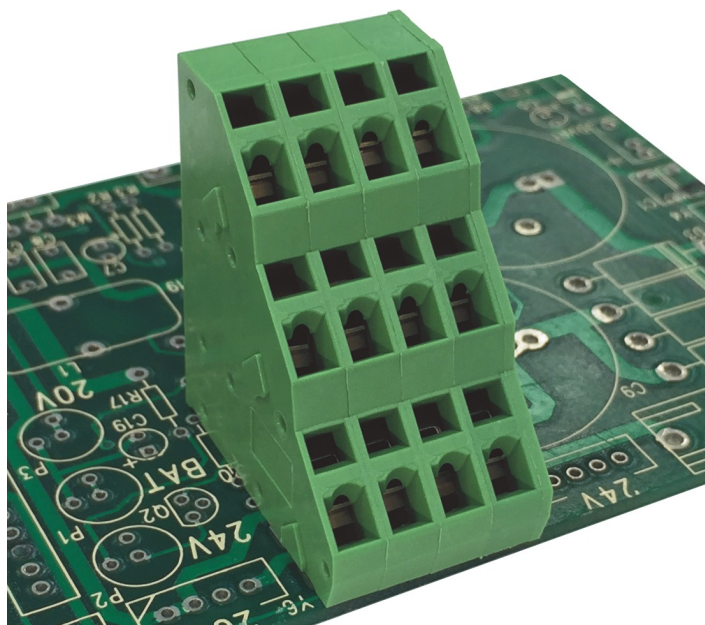

Screwless terminal block - 45° angled - 3 levels - Modular version - Pitch 5,08mm

GENERAL INFORMATION

pitch:	5,08 mm
housing height:	39,00 mm
housing depth:	31.2 mm
dimensional class:	slow
wire section:	2.5 mm ² / 14 AWG
clamp opening size:	
wire stripping:	max 9 mm
operating temperature:	-40°C ÷ +105°C

ELECTRICAL CHARACTERISTICS

current:	24A
voltage:	250V
test voltage:	2 kVrms/60s

MECHANICAL CHARACTERISTICS

spring releasing:	0.6 x 3.5mm
-	-

APPROVALS DATA



UL 1059

current:	-	-	16A factory / 16A field
voltage:	-	-	300V
wire section:	-	-	12÷30AWG
torque:	-	-	-
FILE:	-	-	E178356

MATERIALS

housing:	PA - UL 94 V0
screw:	n/a
clamp/spring:	
terminal:	Tin-plated copper alloy

AVAILABLE COLOURS



(STD)

other colours: upon request

poles	P/N	pcs/pack	W [Kg]*	W [Kg]*
01	MG1T01-5,08	N/A	N/A	N/A
02	MG1T02-5,08	N/A	N/A	N/A
03	MG1T03-5,08	N/A	N/A	N/A
04	MG1T04-5,08	N/A	N/A	N/A
05	MG1T05-5,08	N/A	N/A	N/A
06	MG1T06-5,08	N/A	N/A	N/A
07	MG1T07-5,08	N/A	N/A	N/A
08	MG1T08-5,08	N/A	N/A	N/A
09	MG1T09-5,08	N/A	N/A	N/A
10	MG1T10-5,08	N/A	N/A	N/A
11	MG1T11-5,08	N/A	N/A	N/A
12	MG1T12-5,08	N/A	N/A	N/A
13	MG1T13-5,08	N/A	N/A	N/A
14	MG1T14-5,08	N/A	N/A	N/A
15	MG1T15-5,08	N/A	N/A	N/A
16	MG1T16-5,08	N/A	N/A	N/A
17	MG1T17-5,08	N/A	N/A	N/A
18	MG1T18-5,08	N/A	N/A	N/A
19	MG1T19-5,08	N/A	N/A	N/A
20	MG1T20-5,08	N/A	N/A	N/A
21	MG1T21-5,08	N/A	N/A	N/A
22	MG1T22-5,08	N/A	N/A	N/A
23	MG1T23-5,08	N/A	N/A	N/A