


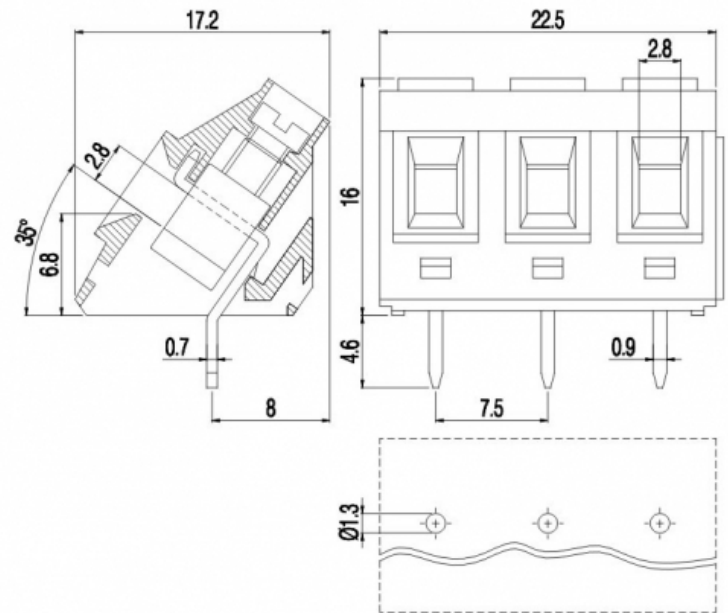

Single-deck terminal block - 35° angled - Modular version - Pitch 7,5mm - 2÷3 poles

GENERAL INFORMATION

pitch:	7,5 mm
housing height:	16,00 mm
housing depth:	17.2 mm
dimensional class:	medium
wire section:	2.5 mm ² / 14 AWG
clamp opening size:	2.8 × 2.8 mm
wire stripping:	max 8 mm
operating temperature:	-40°C ÷ +130°C

ELECTRICAL CHARACTERISTICS

current:	16A
voltage:	750V
test voltage:	3 kVrms/60s

MECHANICAL CHARACTERISTICS

screw:	M3
recommended torque:	0.5÷0.55 Nm / 4.5÷4.9 in.lbs

APPROVALS DATA



EN 60998-1

current:	16A
voltage:	750V
wire section:	2.5mm ²
torque:	0.5Nm
FILE:	EP149



EN 60998-1

current:	16A
voltage:	750V
wire section:	2.5mm ²
torque:	0.5Nm
FILE:	40023956



UL 1059

current:	16A factory / 15A field
voltage:	300V
wire section:	14÷30AWG
torque:	4.5Lb-in
FILE:	E178356

ADDITIONAL INFORMATION

SCIP NUMBER:

eaf82bac-6315-4342-ab62-c9feccb03460

MATERIALS

housing: PA - UL 94 V0
screw: Galvanized steel
clamp/spring: Nickeled copper alloy
terminal: Tin-plated copper alloy

AVAILABLE COLOURS



other colours: upon request

poles	P/N	pcs/pack	W [Kg]*	W [Kg]*
2	MI272-7,5-IT	N/A	N/A	N/A
3	MI273-7,5-IT	N/A	N/A	N/A
..	MI27..-7,5-IT	N/A	N/A	N/A