


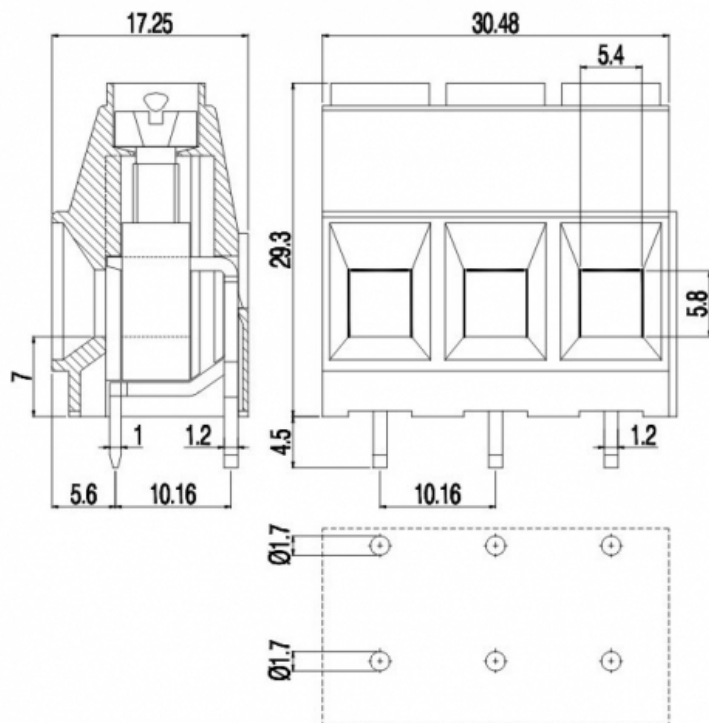

Single-deck terminal block - Power - Modular version - Pitch 10,16mm - 1÷3 poles

GENERAL INFORMATION

pitch:	10,16 mm
housing height:	29,20 mm
housing depth:	17.25 mm
dimensional class:	high
wire section:	10 mm ² / 8 AWG
clamp opening size:	5.4 × 5.8 mm
wire stripping:	max 15 mm
operating temperature:	-40°C ÷ +130°C

ELECTRICAL CHARACTERISTICS

current:	57A
voltage:	750V
test voltage:	3 kVrms/60s

MECHANICAL CHARACTERISTICS

screw:	M4
recommended torque:	1.2÷1.5 Nm / 10.8÷13.6 in.lbs

APPROVALS DATA



-



EN 60998-1
70A
750V
16mm²
1.5Nm
40034945



UL 1059
57A factory / 57A field
300V
6÷30AWG
10.8Lb-in
E178356

current:
voltage:
wire section:
torque:
FILE:

-
-
-
-
-

ADDITIONAL INFORMATION

SCIP NUMBER:

0e22b4d0-f741-437c-bf88-e67efc1bf4a7

MATERIALS

housing: PA - UL 94 V0
screw: Galvanized steel
clamp/spring: Nickeled copper alloy
terminal: Tin-plated copper alloy

AVAILABLE COLOURS



other colours:

upon request

poles	P/N	pcs/pack	W [Kg]*	W [Kg]*
1	MV101-10,16-V	N/A	N/A	N/A
2	MV102-10,16-V	N/A	N/A	N/A
3	MV103-10,16-V	N/A	N/A	N/A
..	MV10..-10,16-V	N/A	N/A	N/A